

Braytron
lighting expert



2021/01
Lighting Unit
Product Catalogue

www.braytron.com

Braytron
lighting expert



www.braytron.com

BRAYTRON, an international brand specialized in lighting with 15 years' experience in manufacturing and distributing high-tech lighting solutions in four continents.

BRAYTRON is a premium brand developed in consultation with specialist in the field of energy conservation.

The emphasis is to design, manufacture, develop and distribute all type of energy-saving lighting products, mainly focusing on LED lighting solutions.

BRAYTRON products are certified under CE, RoHS, EMC, Dekra, EAC and TÜV. We use high quality LED chips and components supplied by reputed suppliers like Bridgelux, Philips, Sharp, Citizen, Meanwell,

Tridonic and so on. All BRAYTRON products are being manufactured after extensive feasibility, research and testing ensure energy conservation and affordability.

With the growing awareness about LED technology all over the world, BRAYTRON aspires to be among the global pioneers in the advancement and distribution of this technology and pledges to remain updated of all new innovations so as to incorporate the same into our product range.

BRAYTRON operates factories in Romania and Turkey with a modern manufacturing base equipped with high-tech production lines and advanced research and development center.



HEAD OFFICE

BRAYTRON SRL

Bulevardul Iuliu Maniu, Nr.616, Sector 6,
Corp B, Etaj 1, Bucharest, Romania
info@braytron.com

EUROPE WAREHOUSE

BRAYTRON SRL

Bulevardul Iuliu Maniu, Nr.616, Sector 6,
Corp B, Etaj 1, Bucharest, Romania


FACTORY


Eksioglu Mah. Saray Cad. No.7
Cekmekoy, Istanbul, TURKEY
info@braytron.com

• Distribution network:

In order to provide the best service to its customers BRAYTRON set up its own warehouses and companies at different locations:

For more specific details please visit website:
www.braytron.com





*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



- LED COB TRACKLIGHTS
- GU10 TRACKLIGHT
- LED COB DOWNLIGHT
- LED LINEAR LIGHT



Features

- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications

- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



A⁺

LED

20,000 HOURS

2 YEARS WARRANTY

Monophase

MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-00300	Shopline-CD	2-Wires	White	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00310	Shopline-CD	2-Wires	White	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00320	Shopline-CD	2-Wires	White	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00301	Shopline-CD	2-Wires	Black	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00311	Shopline-CD	2-Wires	Black	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00321	Shopline-CD	2-Wires	Black	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

A⁺⁺

A⁺

A



B

C

D

E

LED



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features




- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications

- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-00200	Shopline-PD	2-Wires	White	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00210	Shopline-PD	2-Wires	White	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00220	Shopline-PD	2-Wires	White	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00201	Shopline-PD	2-Wires	Black	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00211	Shopline-PD	2-Wires	Black	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00221	Shopline-PD	2-Wires	Black	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12

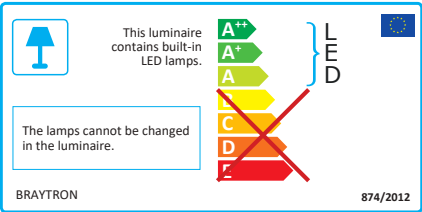

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features




- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications

- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-50200	Shopline-PD	4-Wires	White	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-50210	Shopline-PD	4-Wires	White	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-50220	Shopline-PD	4-Wires	White	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-50201	Shopline-PD	4-Wires	Black	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-50211	Shopline-PD	4-Wires	Black	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-50221	Shopline-PD	4-Wires	Black	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12

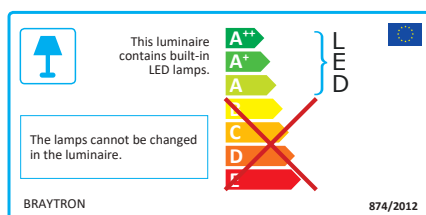

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features




- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications

- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-20200	Shopline-PD	2-Wires	White	3000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-20210	Shopline-PD	2-Wires	White	4000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-20220	Shopline-PD	2-Wires	White	5000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-20201	Shopline-PD	2-Wires	Black	3000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-20211	Shopline-PD	2-Wires	Black	4000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-20221	Shopline-PD	2-Wires	Black	5000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12

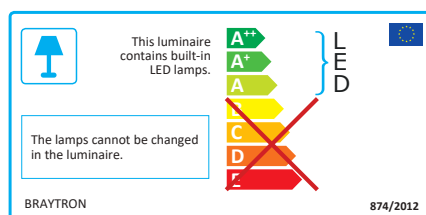

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features




- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications

- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-70200	Shopline-PD	4-Wires	White	3000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-70210	Shopline-PD	4-Wires	White	4000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-70220	Shopline-PD	4-Wires	White	5000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-70201	Shopline-PD	4-Wires	Black	3000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-70211	Shopline-PD	4-Wires	Black	4000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-70221	Shopline-PD	4-Wires	Black	5000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12

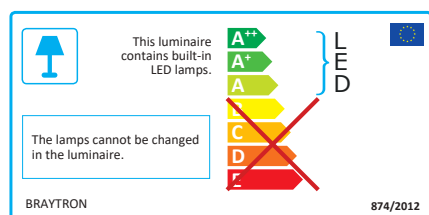

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications




- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



Powered by
SAMSUNG LED



MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-00400	Shopline-PF	2-Wires	White	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00410	Shopline-PF	2-Wires	White	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00420	Shopline-PF	2-Wires	White	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00401	Shopline-PF	2-Wires	Black	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00411	Shopline-PF	2-Wires	Black	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-00421	Shopline-PF	2-Wires	Black	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12

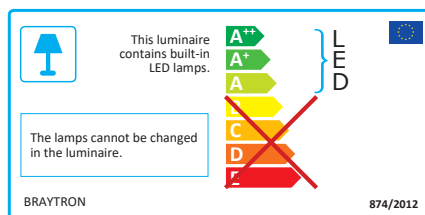

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features




- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications

- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-50400	Shopline-PF	4-Wires	White	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-50410	Shopline-PF	4-Wires	White	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-50420	Shopline-PF	4-Wires	White	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-50401	Shopline-PF	4-Wires	Black	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-50411	Shopline-PF	4-Wires	Black	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-50421	Shopline-PF	4-Wires	Black	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12

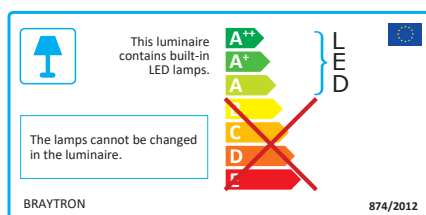

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications




- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



Powered by
SAMSUNG LED



MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-20400	Shopline-PF	2-Wires	White	3000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-20410	Shopline-PF	2-Wires	White	4000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-20420	Shopline-PF	2-Wires	White	5000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-20401	Shopline-PF	2-Wires	Black	3000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-20411	Shopline-PF	2-Wires	Black	4000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-20421	Shopline-PF	2-Wires	Black	5000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12

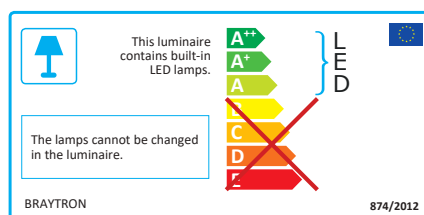

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features




- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications

- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-70400	Shopline-PF	4-Wires	White	3000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-70410	Shopline-PF	4-Wires	White	4000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-70420	Shopline-PF	4-Wires	White	5000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-70401	Shopline-PF	4-Wires	Black	3000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-70411	Shopline-PF	4-Wires	Black	4000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-70421	Shopline-PF	4-Wires	Black	5000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12

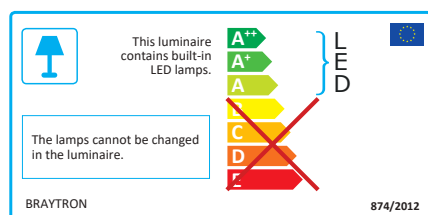

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications

- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



A⁺

LED

Powered by
SAMSUNG LED

20,000
HOURS

2 YEARS
WARRANTY

Monophase

MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-01300	Shopline-PM	2-Wires	White	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-01310	Shopline-PM	2-Wires	White	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-01320	Shopline-PM	2-Wires	White	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-01301	Shopline-PM	2-Wires	Black	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-01311	Shopline-PM	2-Wires	Black	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-01321	Shopline-PM	2-Wires	Black	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED

A⁺

A

A

C

D

E

BRAYTRON

874/2012

CE

EMC

LVD

EMC

ErP

RoHS

Hg 0.0mg

IP 20

Non-Flammable

25,000

-20°C +40°C

*Technical information indicated above may have tolerance ±10%.For final updated information please visit website www.braytron.com

10

www.braytron.com



Features

- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications

- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



Powered by
SAMSUNG LED




LED

20,000
HOURS

2 YEARS
WARRANTY

Monophase

MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-02000	Shopline-PT	2-Wires	White	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-02010	Shopline-PT	2-Wires	White	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-02020	Shopline-PT	2-Wires	White	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-02001	Shopline-PT	2-Wires	Black	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-02011	Shopline-PT	2-Wires	Black	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12
BD30-02021	Shopline-PT	2-Wires	Black	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	12

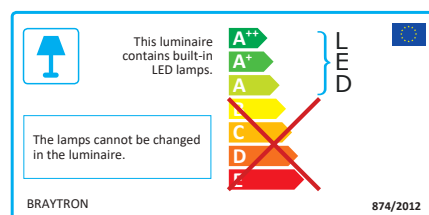

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications




- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



Powered by
SAMSUNG LED



MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-01600	Shopline-PB	2-Wires	White	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	20
BD30-01610	Shopline-PB	2-Wires	White	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	20
BD30-01620	Shopline-PB	2-Wires	White	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	20
BD30-01601	Shopline-PB	2-Wires	Black	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	20
BD30-01611	Shopline-PB	2-Wires	Black	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	20
BD30-01621	Shopline-PB	2-Wires	Black	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	20

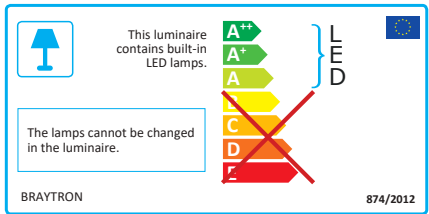

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications




- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



Powered by
SAMSUNG LED



MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-51600	Shopline-PB	4-Wires	White	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	20
BD30-51610	Shopline-PB	4-Wires	White	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	20
BD30-51620	Shopline-PB	4-Wires	White	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	20
BD30-51601	Shopline-PB	4-Wires	Black	3000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	20
BD30-51611	Shopline-PB	4-Wires	Black	4000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	20
BD30-51621	Shopline-PB	4-Wires	Black	5000K	30W	2660Lm	220V-240VAC	>80	>0.95	24°	Aluminium	20

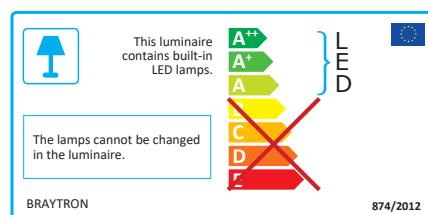

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications

- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



A⁺

LED

Powered by

SAMSUNG LED

20,000 HOURS

2 YEARS WARRANTY

Monophase

MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-01000	Shopline-PM	2-Wires	White	3000K	15W	1180lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-01010	Shopline-PM	2-Wires	White	4000K	15W	1180lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-01020	Shopline-PM	2-Wires	White	5000K	15W	1180lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-01001	Shopline-PM	2-Wires	Black	3000K	15W	1180lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-01011	Shopline-PM	2-Wires	Black	4000K	15W	1180lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-01021	Shopline-PM	2-Wires	Black	5000K	15W	1180lm	220V-240VAC	>80	>0.55	24°	Aluminium	20



This luminaire contains built-in LED lamps.

LED

The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance ±10%.For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications




- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



Powered by
SAMSUNG LED



MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-01400	Shopline-PB	2-Wires	White	3000K	15W	1180Lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-01410	Shopline-PB	2-Wires	White	4000K	15W	1180Lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-01420	Shopline-PB	2-Wires	White	5000K	15W	1180Lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-01401	Shopline-PB	2-Wires	Black	3000K	15W	1180Lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-01411	Shopline-PB	2-Wires	Black	4000K	15W	1180Lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-01421	Shopline-PB	2-Wires	Black	5000K	15W	1180Lm	220V-240VAC	>80	>0.55	24°	Aluminium	20

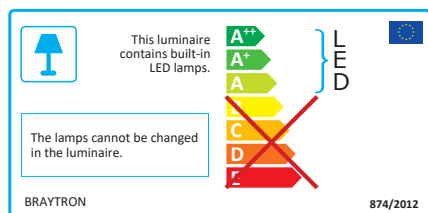


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features




- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Anti-glare design
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver
- Suitable for ceiling use

Applications

- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas

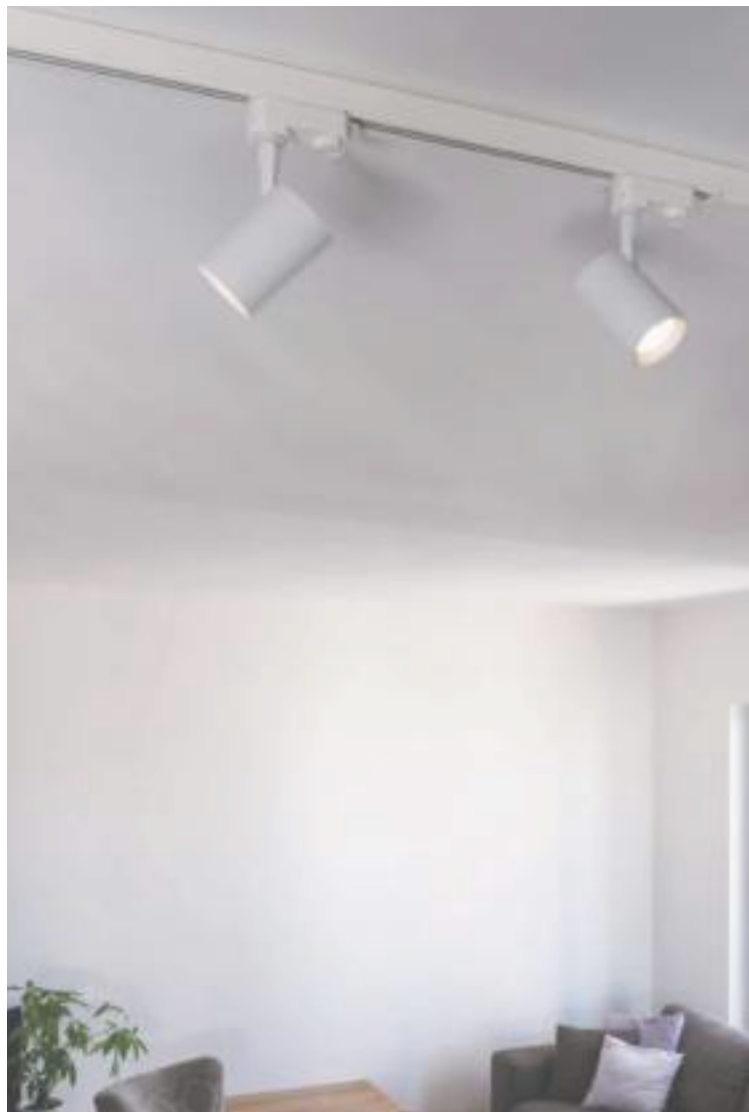

MODEL NO	TYPE	SOCKET	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BD30-51410	Shopline-PB	4-Wires	White	4000K	15W	1180Lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-51420	Shopline-PB	4-Wires	White	5000K	15W	1180Lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-51401	Shopline-PB	4-Wires	Black	3000K	15W	1180Lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-51411	Shopline-PB	4-Wires	Black	4000K	15W	1180Lm	220V-240VAC	>80	>0.55	24°	Aluminium	20
BD30-51421	Shopline-PB	4-Wires	Black	5000K	15W	1180Lm	220V-240VAC	>80	>0.55	24°	Aluminium	20

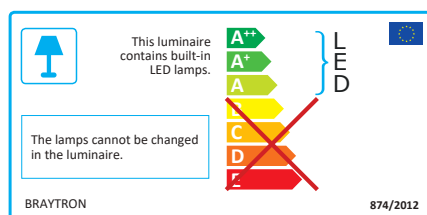

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

**Product Benefits**

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- General indoor lighting
- Showrooms
- Shops
- offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY


MODEL NO	TYPE	SOCKET	BULB SOCKET	BODY COLOR	MAX. WATT	VOLTAGE	MATERIAL	PCS/CTN
BH04-00600	Beta-TR	2-Wires	GU10	White	35W	220V-240VAC	Aluminium	12
BH04-00601	Beta-TR	2-Wires	GU10	Black	35W	220V-240VAC	Aluminium	12
BH04-00606	Beta-TR	2-Wires	GU10	Golden	35W	220V-240VAC	Aluminium	12
BH04-50600	Beta-TR	4-Wires	GU10	White	35W	220V-240VAC	Aluminium	12
BH04-50601	Beta-TR	4-Wires	GU10	Black	35W	220V-240VAC	Aluminium	12
BH04-50606	Beta-TR	4-Wires	GU10	Golden	35W	220V-240VAC	Aluminium	12

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

The LED lamps cannot be changed in the luminaire.

BRAYTRON 874/2012




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Flicker-free
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver

Applications

- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas



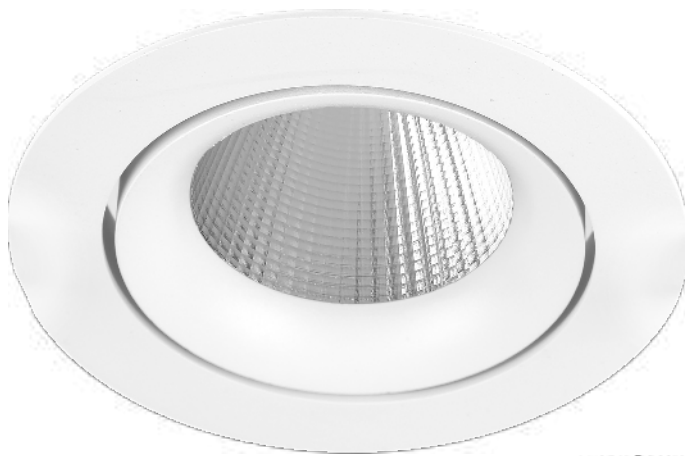


Powered by

Powered by **SAMSUNG LED** **LED** **20,000 HOURS** **3 YEARS WARRANTY**



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BD36-00300	Shopline-PR	White	3000K	30W	2700Lm	220V-240VAC	>80	>0.95	24°	Ø145	Aluminium	12
BD36-00310	Shopline-PR	White	4000K	30W	2700Lm	220V-240VAC	>80	>0.95	24°	Ø145	Aluminium	12
BD36-00330	Shopline-PR	White	6500K	30W	2700Lm	220V-240VAC	>80	>0.95	24°	Ø145	Aluminium	12
BD36-20300	Shopline-PR	White	3000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Ø145	Aluminium	12
BD36-20310	Shopline-PR	White	4000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Ø145	Aluminium	12
BD36-20330	Shopline-PR	White	6500K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Ø145	Aluminium	12
BD36-00301	Shopline-PR	Black	3000K	30W	2700Lm	220V-240VAC	>80	>0.95	24°	Ø145	Aluminium	12
BD36-00311	Shopline-PR	Black	4000K	30W	2700Lm	220V-240VAC	>80	>0.95	24°	Ø145	Aluminium	12
BD36-00331	Shopline-PR	Black	6500K	30W	2700Lm	220V-240VAC	>80	>0.95	24°	Ø145	Aluminium	12
BD36-20301	Shopline-PR	Black	3000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Ø145	Aluminium	12
BD36-20311	Shopline-PR	Black	4000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Ø145	Aluminium	12
BD36-20331	Shopline-PR	Black	6500K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	Ø145	Aluminium	12

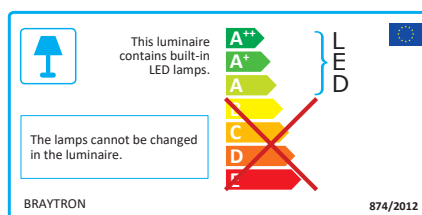

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Flicker-free
- Smart product for tool-free installation
- Made of aluminium die-cast body
- Optional Dimmable driver
- External driver

Applications

- Shops
- Offices
- Hotels
- Showrooms
- Cafe & restaurants
- Living areas






Powered by

SAMSUNG LED



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BD36-00500	Shopline-PS	White	3000K	30W	2700Lm	220V-240VAC	>80	>0.95	24°	140	Aluminium	12
BD36-00510	Shopline-PS	White	4000K	30W	2700Lm	220V-240VAC	>80	>0.95	24°	140	Aluminium	12
BD36-00530	Shopline-PS	White	6500K	30W	2700Lm	220V-240VAC	>80	>0.95	24°	140	Aluminium	12
BD36-20500	Shopline-PS	White	3000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	140	Aluminium	12
BD36-20510	Shopline-PS	White	4000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	140	Aluminium	12
BD36-20530	Shopline-PS	White	6500K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	140	Aluminium	12
BD36-00501	Shopline-PS	Black	3000K	30W	2700Lm	220V-240VAC	>80	>0.95	24°	140	Aluminium	12
BD36-00511	Shopline-PS	Black	4000K	30W	2700Lm	220V-240VAC	>80	>0.95	24°	140	Aluminium	12
BD36-00531	Shopline-PS	Black	6500K	30W	2700Lm	220V-240VAC	>80	>0.95	24°	140	Aluminium	12
BD36-20501	Shopline-PS	Black	3000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	140	Aluminium	12
BD36-20511	Shopline-PS	Black	4000K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	140	Aluminium	12
BD36-20531	Shopline-PS	Black	6500K	40W	3600Lm	220V-240VAC	>80	>0.95	24°	140	Aluminium	12

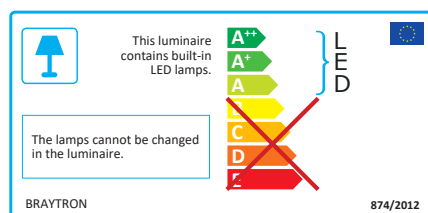

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



- COB LED SPOTLIGHT
- SMD LED SPOTLIGHT
- LED DOWNLIGHT
- COB LED SPOTLIGHT
- CEILING FIXTURE
- LED PANEL LIGHT
- SPOTLIGHT FIXTURE



Product Benefits




- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BH06-00200	Mini Spot-A	White	3000K	3W	240Lm	220V-240VAC	>80	>0.55	38°	Ø32	Plastic	100
BH06-00210	Mini Spot-A	White	4000K	3W	240Lm	220V-240VAC	>80	>0.55	38°	Ø32	Plastic	100
BH06-00230	Mini Spot-A	White	6500K	3W	240Lm	220V-240VAC	>80	>0.55	38°	Ø32	Plastic	100
BH06-00201	Mini Spot-A	Black	3000K	3W	240Lm	220V-240VAC	>80	>0.55	38°	Ø32	Plastic	100
BH06-00211	Mini Spot-A	Black	4000K	3W	240Lm	220V-240VAC	>80	>0.55	38°	Ø32	Plastic	100
BH06-00231	Mini Spot-A	Black	6500K	3W	240Lm	220V-240VAC	>80	>0.55	38°	Ø32	Plastic	100
BH06-00203	Mini Spot-A	Grey	3000K	3W	240Lm	220V-240VAC	>80	>0.55	38°	Ø32	Plastic	100
BH06-00213	Mini Spot-A	Grey	4000K	3W	240Lm	220V-240VAC	>80	>0.55	38°	Ø32	Plastic	100
BH06-00233	Mini Spot-A	Grey	6500K	3W	240Lm	220V-240VAC	>80	>0.55	38°	Ø32	Plastic	100
BH06-00206	Mini Spot-A	Golden	3000K	3W	240Lm	220V-240VAC	>80	>0.55	38°	Ø32	Plastic	100
BH06-00216	Mini Spot-A	Golden	4000K	3W	240Lm	220V-240VAC	>80	>0.55	38°	Ø32	Plastic	100
BH06-00236	Mini Spot-A	Golden	6500K	3W	240Lm	220V-240VAC	>80	>0.55	38°	Ø32	Plastic	100

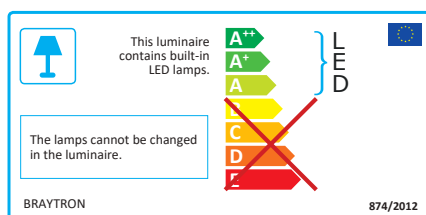

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants




A+




LED

20,000 HOURS

2 YEARS WARRANTY

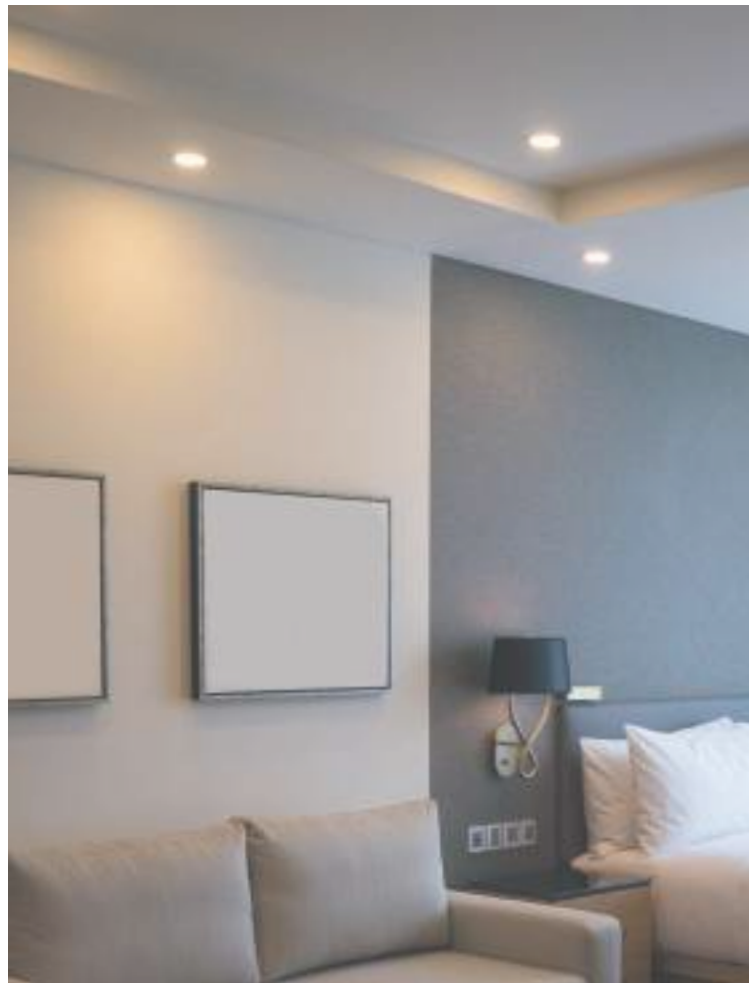

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BD02-00300	Spotled-G1	White	3000K	3W	265Lm	220V-240VAC	>80	>0.55	38°	Ø58	Plastic	100
BD02-00310	Spotled-G1	White	4000K	3W	265Lm	220V-240VAC	>80	>0.55	38°	Ø58	Plastic	100
BD02-00330	Spotled-G1	White	6500K	3W	265Lm	220V-240VAC	>80	>0.55	38°	Ø58	Plastic	100

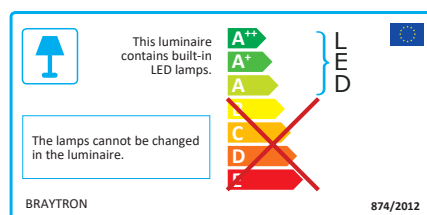

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

**Product Benefits**

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants

A⁺



LED

20,000 HOURS


2 YEARS WARRANTY




MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BD02-00500	Spotled-G1	White	3000K	5W	430Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100
BD02-00510	Spotled-G1	White	4000K	5W	430Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100
BD02-00530	Spotled-G1	White	6500K	5W	430Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100
BD02-00700	Spotled-G1	White	3000K	7W	630Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100
BD02-00710	Spotled-G1	White	4000K	7W	630Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100
BD02-00730	Spotled-G1	White	6500K	7W	630Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100
BD02-00501	Spotled-G1	Black	3000K	5W	430Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100
BD02-00511	Spotled-G1	Black	4000K	5W	430Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100
BD02-00531	Spotled-G1	Black	6500K	5W	430Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100
BD02-00701	Spotled-G1	Black	3000K	7W	630Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100
BD02-00711	Spotled-G1	Black	4000K	7W	630Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100
BD02-00731	Spotled-G1	Black	6500K	7W	630Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100

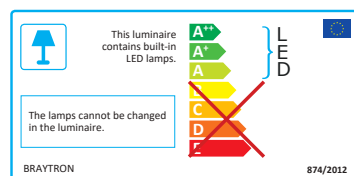

5W



7W



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BD02-01000	Spotled-G1	White	3000K	10W	950lm	220V-240VAC	>80	>0.55	38°	Ø95	Plastic	50
BD02-01010	Spotled-G1	White	4000K	10W	950lm	220V-240VAC	>80	>0.55	38°	Ø95	Plastic	50
BD02-01030	Spotled-G1	White	6500K	10W	950lm	220V-240VAC	>80	>0.55	38°	Ø95	Plastic	50

This luminaire contains built-in LED lamps.




The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

A++
A+
A
C
D
E

LED



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BD02-10500	Spotled-G1	White	3000K	5W	430Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100
BD02-10510	Spotled-G1	White	4000K	5W	430Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100
BD02-10530	Spotled-G1	White	6500K	5W	430Lm	220V-240VAC	>80	>0.55	38°	Ø75	Plastic	100

This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

LED

A++
A+
A
C
D
E



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



3CCT IN ONE



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BD01-00780	Spotted-G3	White	3000K/4000K/6500K	7W	660Lm	220V-240VAC	>80	>0.55	38°	Ø70	Plastic	100

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

A++

A+

A

B


C

D

E

F

LED



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



3CCT IN ONE



LED


20,000 HOURS

2 YEARS WARRANTY

A+



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BD02-00780	Spotled-G3	White	3000K/4000K/6500K	7W	660Lm	220V-240VAC	>80	>0.55	38°	Ø70	Plastic	100
BD02-00781	Spotled-G3	Black	3000K/4000K/6500K	7W	660Lm	220V-240VAC	>80	>0.55	38°	Ø70	Plastic	100
BD02-00783	Spotled-G3	Silver	3000K/4000K/6500K	7W	660Lm	220V-240VAC	>80	>0.55	38°	Ø70	Plastic	100

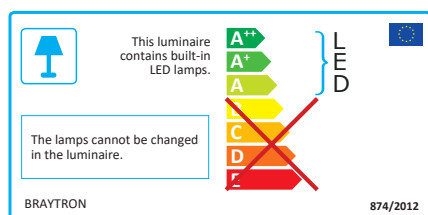

CE ENEC

LVD

EMC

ErP

RoHS


Hg 0.0mg

IP 54

Non-halogen

> 25,000

-20°C +40°C



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



3CCT IN ONE



LED



20,000 HOURS

2 YEARS WARRANTY

A+



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BD02-10780	Spotled-G3	White	3000K/4000K/6500K	7W	660Lm	220V-240VAC	>80	>0.55	38°	Ø70	Plastic	100
BD02-10781	Spotled-G3	Black	3000K/4000K/6500K	7W	660Lm	220V-240VAC	>80	>0.55	38°	Ø70	Plastic	100
BD02-10783	Spotled-G3	Silver	3000K/4000K/6500K	7W	660Lm	220V-240VAC	>80	>0.55	38°	Ø70	Plastic	100

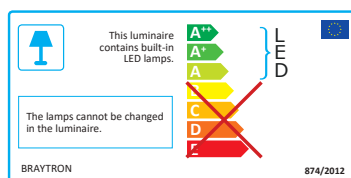

CE EAC

LVD

EMC

ErP

RoHS


Hg 0.0mg

IP20

Non-Flammable

GROUP > 25,000

-20°C +40°C



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits




- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BP12-00400	Basic	White	3000K	4W	250Lm	220V-240VAC	>80	>0.55	120°	Ø65	Plastic	40
BP12-00410	Basic	White	4000K	4W	250Lm	220V-240VAC	>80	>0.55	120°	Ø65	Plastic	40
BP12-00430	Basic	White	6500K	4W	250Lm	220V-240VAC	>80	>0.55	120°	Ø65	Plastic	40
BP12-00600	Basic	White	3000K	6W	400Lm	220V-240VAC	>80	>0.55	120°	Ø75	Plastic	40
BP12-00610	Basic	White	4000K	6W	400Lm	220V-240VAC	>80	>0.55	120°	Ø75	Plastic	40
BP12-00630	Basic	White	6500K	6W	400Lm	220V-240VAC	>80	>0.55	120°	Ø75	Plastic	40
BP12-00800	Basic	White	3000K	8W	660Lm	220V-240VAC	>80	>0.55	120°	Ø90	Plastic	40
BP12-00810	Basic	White	4000K	8W	660Lm	220V-240VAC	>80	>0.55	120°	Ø90	Plastic	40
BP12-00830	Basic	White	6500K	8W	660Lm	220V-240VAC	>80	>0.55	120°	Ø90	Plastic	40
BP12-01200	Basic	White	3000K	12W	950Lm	220V-240VAC	>80	>0.55	120°	Ø120	Plastic	40
BP12-01210	Basic	White	4000K	12W	950Lm	220V-240VAC	>80	>0.55	120°	Ø120	Plastic	40
BP12-01230	Basic	White	6500K	12W	950Lm	220V-240VAC	>80	>0.55	120°	Ø120	Plastic	40

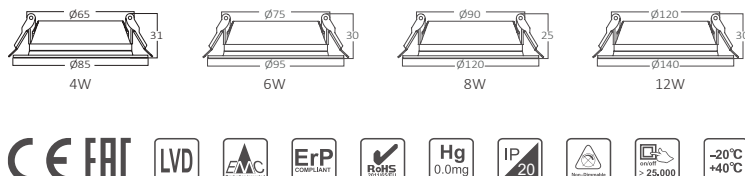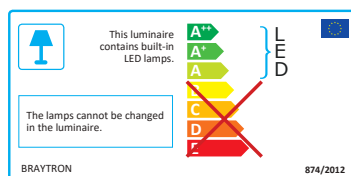

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits




- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BP12-01500	Basic	White	3000K	15W	1320Lm	220V-240VAC	>80	>0.55	120°	Ø150	Plastic	20
BP12-01510	Basic	White	4000K	15W	1320Lm	220V-240VAC	>80	>0.55	120°	Ø150	Plastic	20
BP12-01530	Basic	White	6500K	15W	1320Lm	220V-240VAC	>80	>0.55	120°	Ø150	Plastic	20
BP12-01800	Basic	White	3000K	18W	1620Lm	220V-240VAC	>80	>0.55	120°	Ø180	Plastic	20
BP12-01810	Basic	White	4000K	18W	1620Lm	220V-240VAC	>80	>0.55	120°	Ø180	Plastic	20
BP12-01830	Basic	White	6500K	18W	1620Lm	220V-240VAC	>80	>0.55	120°	Ø180	Plastic	20
BP12-02400	Basic	White	3000K	24W	2120Lm	220V-240VAC	>80	>0.55	120°	Ø190	Plastic	20
BP12-02410	Basic	White	4000K	24W	2120Lm	220V-240VAC	>80	>0.55	120°	Ø190	Plastic	20
BP12-02430	Basic	White	6500K	24W	2120Lm	220V-240VAC	>80	>0.55	120°	Ø190	Plastic	20

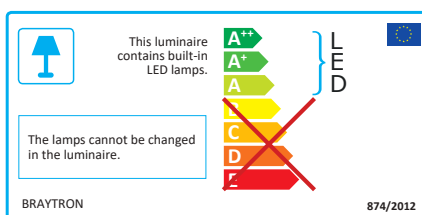

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



31

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants




A+

Powered by
SAMSUNG LED



LED

20,000
HOURS


5 YEARS
WARRANTY

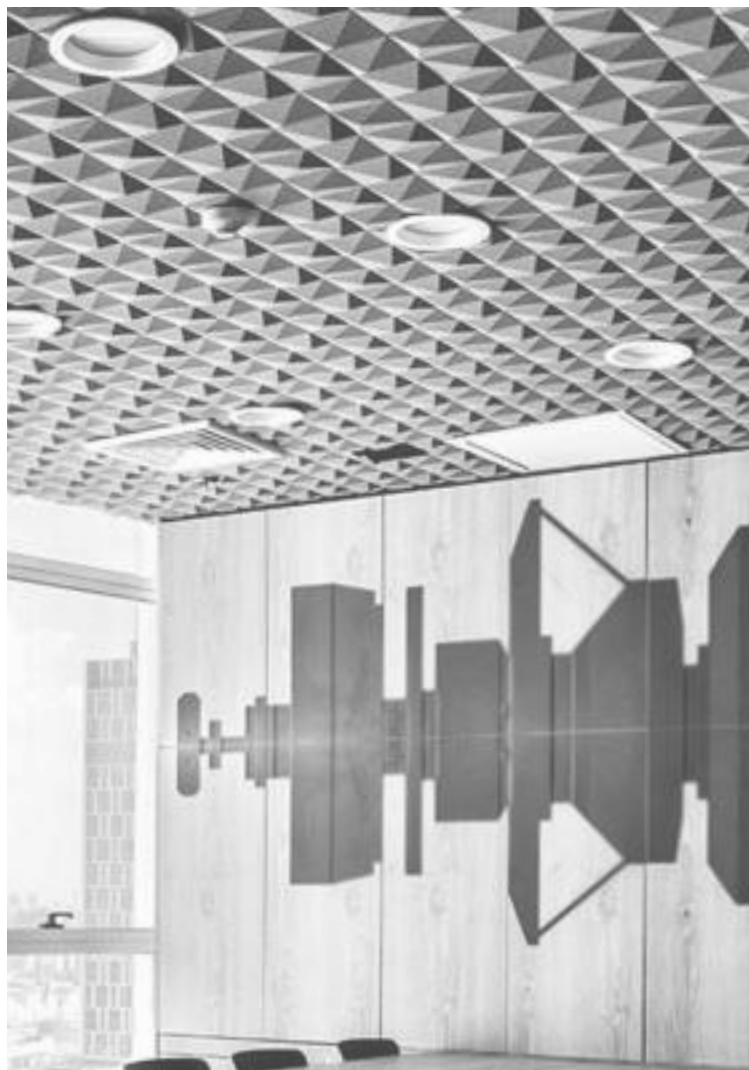


MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BP13-01800	Faton	White	3000K	18W	1800Lm	220V-240VAC	>80	>0.55	120°	Ø150	Aluminium	20
BP13-01810	Faton	White	4000K	18W	1800Lm	220V-240VAC	>80	>0.55	120°	Ø150	Aluminium	20
BP13-01830	Faton	White	6500K	18W	1800Lm	220V-240VAC	>80	>0.55	120°	Ø150	Aluminium	20
BP13-02400	Faton	White	3000K	24W	2400Lm	220V-240VAC	>80	>0.55	120°	Ø200	Aluminium	10
BP13-02410	Faton	White	4000K	24W	2400Lm	220V-240VAC	>80	>0.55	120°	Ø200	Aluminium	10
BP13-02430	Faton	White	6500K	24W	2400Lm	220V-240VAC	>80	>0.55	120°	Ø200	Aluminium	10
BP13-03200	Faton	White	3000K	32W	2880Lm	220V-240VAC	>80	>0.95	120°	Ø200	Aluminium	10
BP13-03210	Faton	White	4000K	32W	2880Lm	220V-240VAC	>80	>0.95	120°	Ø200	Aluminium	10
BP13-03230	Faton	White	6500K	32W	2880Lm	220V-240VAC	>80	>0.95	120°	Ø200	Aluminium	10

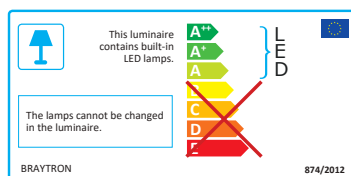


18W



24W



32W




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

**Product Benefits**




- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants

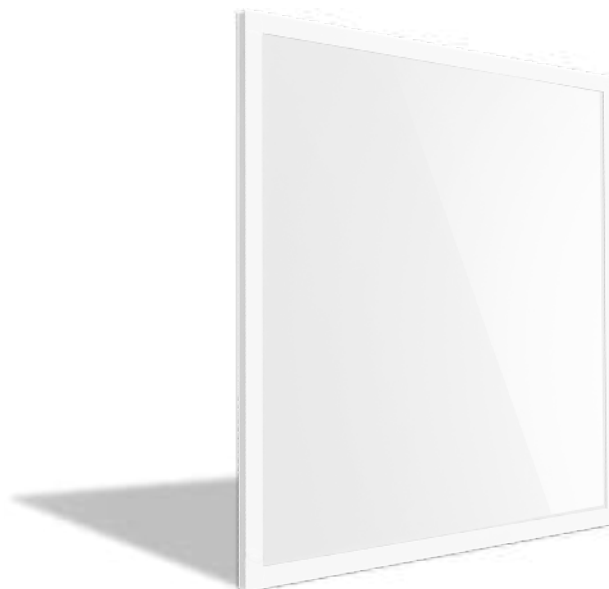**A⁺****LED****20,000 HOURS****3 YEARS WARRANTY****100Lm/w**

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP16-36600	Panelled-RC	White	3000K	40W	4000Lm	220V-240VAC	>80	>0.95	110°	Aluminium	5
BP16-36610	Panelled-RC	White	4000K	40W	4000Lm	220V-240VAC	>80	>0.95	110°	Aluminium	5
BP16-36630	Panelled-RC	White	6500K	40W	4000Lm	220V-240VAC	>80	>0.95	110°	Aluminium	5

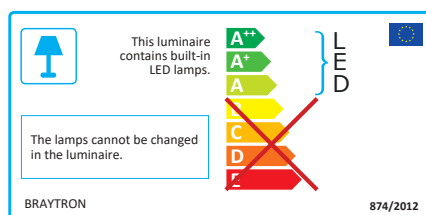



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants

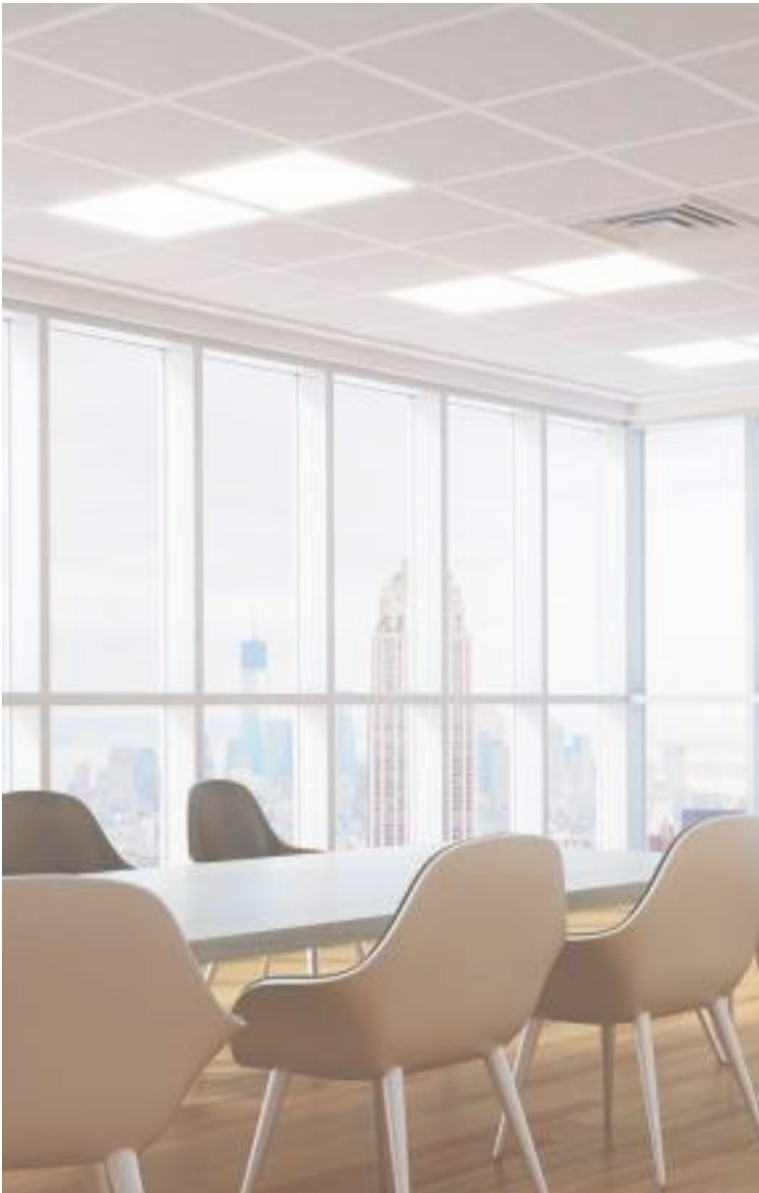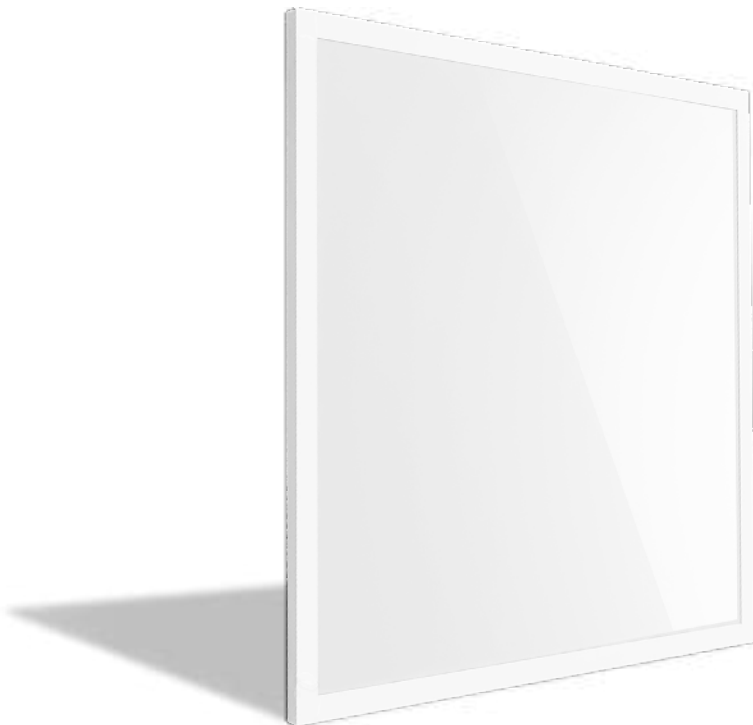



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP16-46200	Panelled-RP	White	3000K	40W	4000Lm	220V-240VAC	>80	>0.95	110°	Aluminium	5
BP16-46210	Panelled-RP	White	4000K	40W	4000Lm	220V-240VAC	>80	>0.95	110°	Aluminium	5
BP16-46230	Panelled-RP	White	6500K	40W	4000Lm	220V-240VAC	>80	>0.95	110°	Aluminium	5

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

**Product Benefits**

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants




MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP16-33110	Panelled-RC	White	4000K	40W	4000Lm	220V-240VAC	>80	>0.95	110°	Aluminium	5
BP16-33130	Panelled-RC	White	6500K	40W	4000Lm	220V-240VAC	>80	>0.95	110°	Aluminium	5

 This luminaire contains built-in LED lamps.

 LED

The lamps cannot be changed in the luminaire.

BRAYTRON 874/2012





*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits




- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants

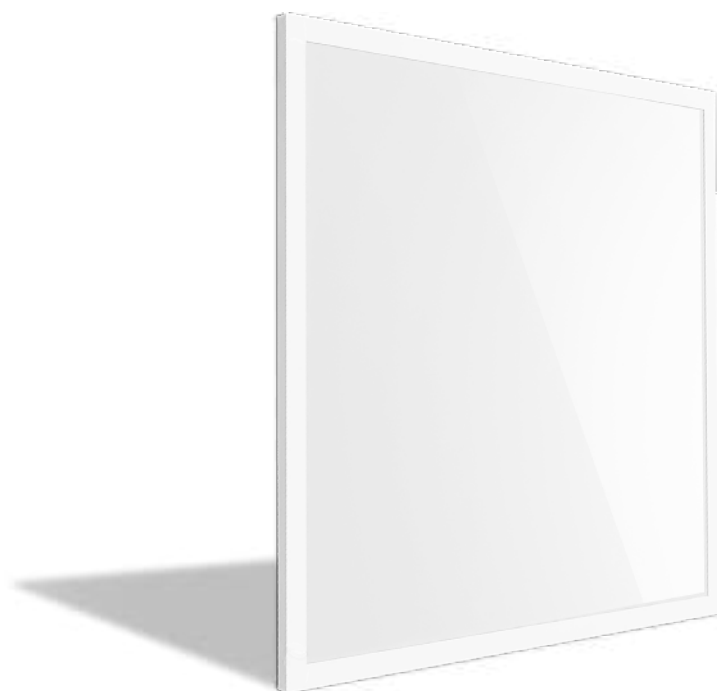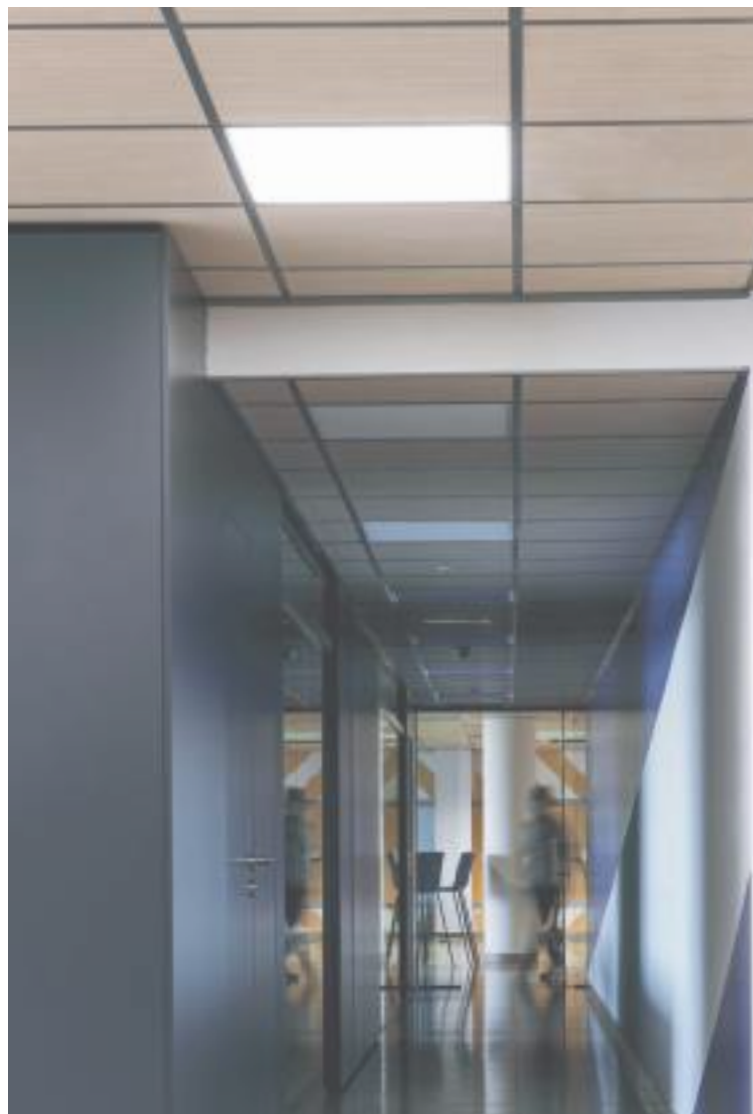

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP15-36600	Panelled-RC	White	3000K	40W	3400Lm	220V-240VAC	>80	>0.95	110°	Aluminium	10
BP15-36610	Panelled-RC	White	4000K	40W	3400Lm	220V-240VAC	>80	>0.95	110°	Aluminium	10
BP15-36630	Panelled-RC	White	6500K	40W	3400Lm	220V-240VAC	>80	>0.95	110°	Aluminium	10
BP15-56600	Panelled-RC	White	3000K	48W	4000Lm	220V-240VAC	>80	>0.95	110°	Aluminium	10
BP15-56610	Panelled-RC	White	4000K	48W	4000Lm	220V-240VAC	>80	>0.95	110°	Aluminium	10
BP15-56630	Panelled-RC	White	6500K	48W	4000Lm	220V-240VAC	>80	>0.95	110°	Aluminium	10

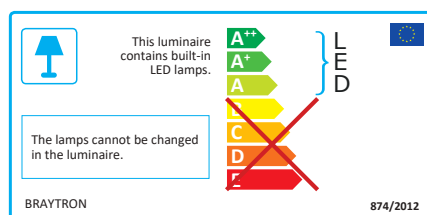

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

**Product Benefits**




- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants

Ultra Slim Design

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP27-36610	Backlite	White	4000K	40W	4000Lm	220V-240VAC	>80	>0.95	110°	Metal	5
BP27-36630	Backlite	White	6500K	40W	4000Lm	220V-240VAC	>80	>0.95	110°	Metal	5

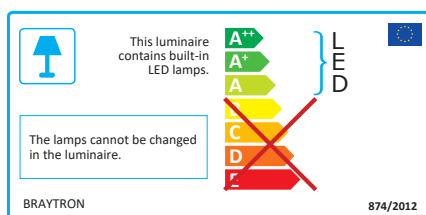

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants

Ultra Slim Design

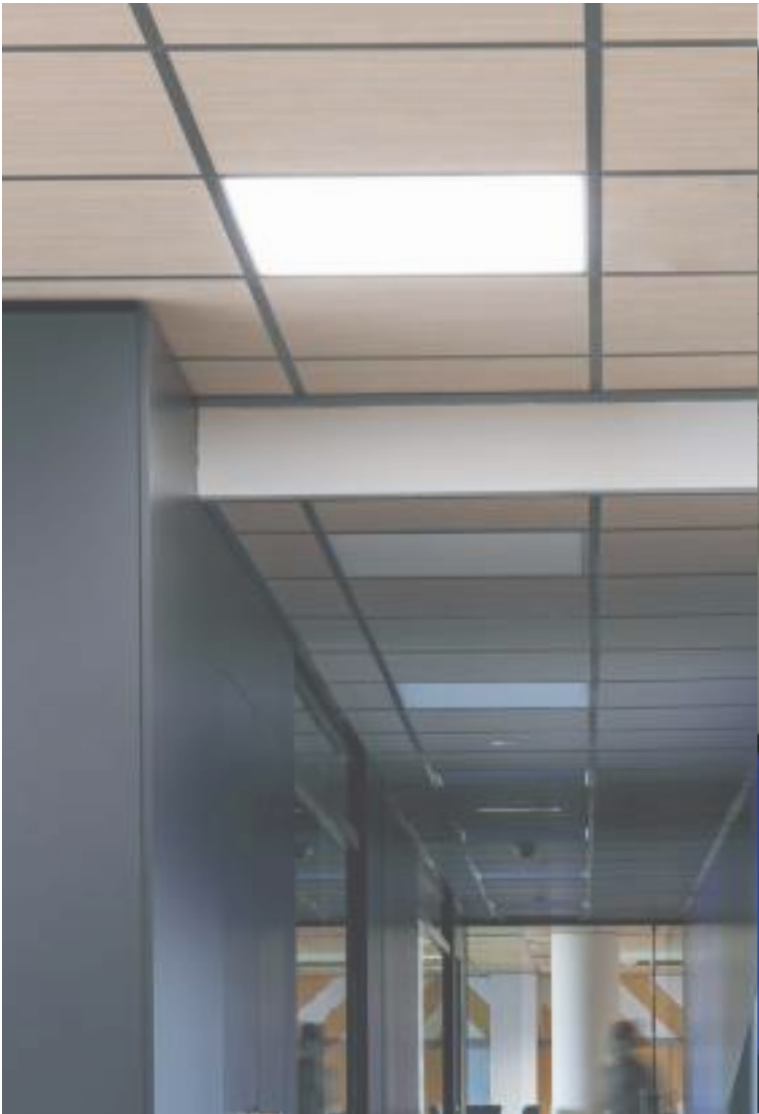

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP28-36610	Panelled-RP	White	4000K	40W	4000Lm	220V-240VAC	>80	>0.95	120°	Metal	8
BP28-36630	Panelled-RP	White	6500K	40W	4000Lm	220V-240VAC	>80	>0.95	120°	Metal	8
BP28-56610	Panelled-RP	White	4000K	50W	4500Lm	220V-240VAC	>80	>0.95	120°	Metal	8
BP28-56630	Panelled-RP	White	6500K	50W	4500Lm	220V-240VAC	>80	>0.95	120°	Metal	8



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

BRAYTRON



874/2012



A++
A+
A
C
D
E

LED





*Technical information indicated above may have tolerance ±10%.For final updated information please visit website www.braytron.com

**Product Benefits**

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants

A⁺

LED

20,000
HOURS3 YEARS
WARRANTY

80Lm/w

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP23-36600	Backlite	White	3000K	40W	3400Lm	220V-240VAC	>80	>0.95	110°	Metal	6
BP23-36610	Backlite	White	4000K	40W	3400Lm	220V-240VAC	>80	>0.95	110°	Metal	6
BP23-36630	Backlite	White	6500K	40W	3400Lm	220V-240VAC	>80	>0.95	110°	Metal	6
BP23-56600	Backlite	White	3000K	50W	4000Lm	220V-240VAC	>80	>0.95	110°	Metal	6
BP23-56610	Backlite	White	4000K	50W	4000Lm	220V-240VAC	>80	>0.95	110°	Metal	6
BP23-56630	Backlite	White	6500K	50W	4000Lm	220V-240VAC	>80	>0.95	110°	Metal	6

 This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

LED

A++
A+
A
C
D
E



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP21-03110	Panelled-SL	White	4000K	50W	5000Lm	220V-240VAC	>80	>0.95	110°	Iron	1
BP21-03130	Panelled-SL	White	6500K	50W	5000Lm	220V-240VAC	>80	>0.95	110°	Iron	1



This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



LED



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

**Product Benefits**




- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP21-06600	Panelled-SL	White	3000K	50W	5000Lm	220V-240VAC	>80	>0.95	110°	Iron	1
BP21-06610	Panelled-SL	White	4000K	50W	5000Lm	220V-240VAC	>80	>0.95	110°	Iron	1
BP21-06630	Panelled-SL	White	6500K	50W	5000Lm	220V-240VAC	>80	>0.95	110°	Iron	1

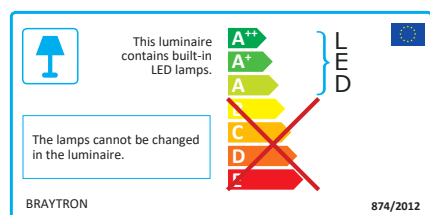

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



A+



LED

30,000 HOURS

2 YIL GARANTİ

85Lm/w

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP22-06610	Panelled-FL	White	4000K	40W	3400Lm	220V-240VAC	>80	>0.95	110°	Iron	6
BP22-06630	Panelled-FL	White	6500K	40W	3400Lm	220V-240VAC	>80	>0.95	110°	Iron	6
BP22-56610	Panelled-FL	White	4000K	50W	4250Lm	220V-240VAC	>80	>0.95	110°	Iron	6
BP22-56630	Panelled-FL	White	6500K	50W	4250Lm	220V-240VAC	>80	>0.95	110°	Iron	6

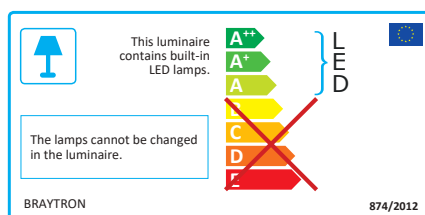

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS COMPLIANT


Hg 0.0mg

IP20

Non-Flammable

>25,000

-20°C +40°C



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

**Product Benefits**

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants




A⁺

LED

20,000
HOURS3 YEARS
WARRANTY

80Lm/w

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP24-36600	Backlite	White	3000K	40W	3200Lm	220V-240VAC	>80	>0.95	110°	Metal	6
BP24-36610	Backlite	White	4000K	40W	3200Lm	220V-240VAC	>80	>0.95	110°	Metal	6
BP24-36630	Backlite	White	6500K	40W	3200Lm	220V-240VAC	>80	>0.95	110°	Metal	6
BP24-56600	Backlite	White	3000K	50W	4000Lm	220V-240VAC	>80	>0.95	110°	Metal	6
BP24-56610	Backlite	White	4000K	50W	4000Lm	220V-240VAC	>80	>0.95	110°	Metal	6
BP24-56630	Backlite	White	6500K	50W	4000Lm	220V-240VAC	>80	>0.95	110°	Metal	6

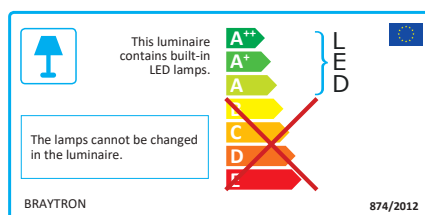


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



60x60 Aluminium Surface Frame

MODEL NO	BODY COLOR	MATERIAL	PCS/CTN
BP16-99040	White	Aluminium	20




3 YEARS WARRANTY



30x120 Aluminium Surface Frame

MODEL NO	BODY COLOR	MATERIAL	PCS/CTN
BP16-99030	White	Aluminium	20



3 YEARS WARRANTY



Adjustable suspension wire

MODEL NO	MATERIAL	PCS/CTN
BP16-99060	Iron-Steel	100

3 YEARS WARRANTY



Recessed Apparatus

MODEL NO	MATERIAL	PCS/CTN
BP16-99050	Iron	125

3 YEARS WARRANTY



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

**Product Benefits**



- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications


- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants




MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BP01-60300	SMD-CRP	White	3000K	3W	220Lm	220V-240VAC	>80	>0.55	110°	Ø75	Plastic	40
BP01-60310	SMD-CRP	White	4000K	3W	220Lm	220V-240VAC	>80	>0.55	110°	Ø75	Plastic	40
BP01-60330	SMD-CRP	White	6500K	3W	220Lm	220V-240VAC	>80	>0.55	110°	Ø75	Plastic	40
BP01-70300	SMD-CRP	White	3000K	3W	220Lm	220V-240VAC	>80	>0.55	110°	Ø75	Plastic	40
BP01-70310	SMD-CRP	White	4000K	3W	220Lm	220V-240VAC	>80	>0.55	110°	Ø75	Plastic	40
BP01-70330	SMD-CRP	White	6500K	3W	220Lm	220V-240VAC	>80	>0.55	110°	Ø75	Plastic	40
BP01-60600	SMD-CRP	White	3000K	6W	450Lm	220V-240VAC	>80	>0.55	110°	Ø115	Plastic	40
BP01-60610	SMD-CRP	White	4000K	6W	450Lm	220V-240VAC	>80	>0.55	110°	Ø115	Plastic	40
BP01-60630	SMD-CRP	White	6500K	6W	450Lm	220V-240VAC	>80	>0.55	110°	Ø115	Plastic	40
BP01-60900	SMD-CRP	White	3000K	9W	760Lm	220V-240VAC	>80	>0.55	110°	Ø130	Plastic	20
BP01-60910	SMD-CRP	White	4000K	9W	760Lm	220V-240VAC	>80	>0.55	110°	Ø130	Plastic	20
BP01-60930	SMD-CRP	White	6500K	9W	760Lm	220V-240VAC	>80	>0.55	110°	Ø130	Plastic	20
BP01-61200	SMD-CRP	White	3000K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	Ø155	Plastic	20
BP01-61210	SMD-CRP	White	4000K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	Ø155	Plastic	20
BP01-61230	SMD-CRP	White	6500K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	Ø155	Plastic	20

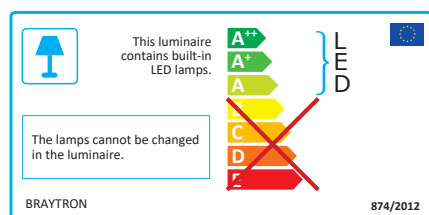


3W




6W



9W



12W



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits



- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications


- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants




MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BP01-61500	SMD-CRP	White	3000K	15W	1350Lm	220V-240VAC	>80	>0.55	110°	Ø185	Plastic	20
BP01-61510	SMD-CRP	White	4000K	15W	1350Lm	220V-240VAC	>80	>0.55	110°	Ø185	Plastic	20
BP01-61530	SMD-CRP	White	6500K	15W	1350Lm	220V-240VAC	>80	>0.55	110°	Ø185	Plastic	20
BP01-61800	SMD-CRP	White	3000K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	Ø210	Plastic	20
BP01-61810	SMD-CRP	White	4000K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	Ø210	Plastic	20
BP01-61830	SMD-CRP	White	6500K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	Ø210	Plastic	20
BP01-62400	SMD-CRP	White	3000K	24W	2160Lm	220V-240VAC	>80	>0.55	110°	Ø280	Plastic	10
BP01-62410	SMD-CRP	White	4000K	24W	2160Lm	220V-240VAC	>80	>0.55	110°	Ø280	Plastic	10
BP01-62430	SMD-CRP	White	6500K	24W	2160Lm	220V-240VAC	>80	>0.55	110°	Ø280	Plastic	10

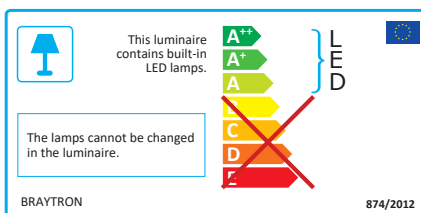


15W



18W



24W



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants





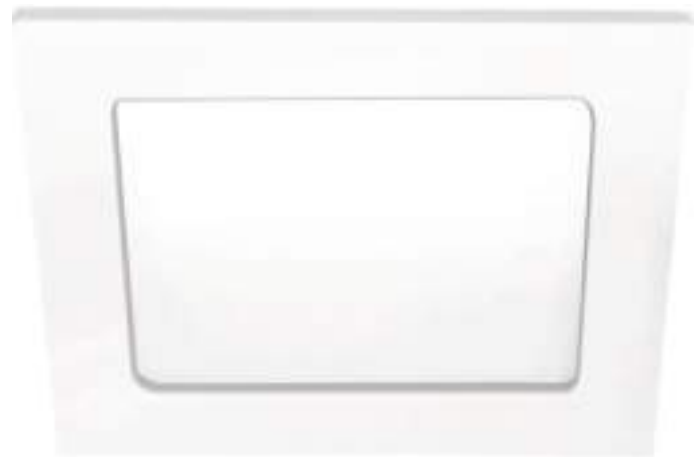
A⁺

LED

20,000
HOURS2 YEARS
WARRANTY

IP40

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BP02-60600	SMD-CSP	White	3000K	6W	450Lm	220V-240VAC	>80	>0.55	110°	115	Plastic	40
BP02-60610	SMD-CSP	White	4000K	6W	450Lm	220V-240VAC	>80	>0.55	110°	115	Plastic	40
BP02-60630	SMD-CSP	White	6500K	6W	450Lm	220V-240VAC	>80	>0.55	110°	115	Plastic	40
BP02-61200	SMD-CSP	White	3000K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	155	Plastic	20
BP02-61210	SMD-CSP	White	4000K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	155	Plastic	20
BP02-61230	SMD-CSP	White	6500K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	155	Plastic	20
BP02-61800	SMD-CSP	White	3000K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	210	Plastic	20
BP02-61810	SMD-CSP	White	4000K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	210	Plastic	20
BP02-61830	SMD-CSP	White	6500K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	210	Plastic	20

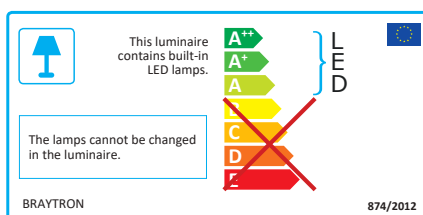

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



A+





LED

20,000 HOURS

2 YEARS WARRANTY

IP40

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP03-61200	SMD-SRP	White	3000K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	Plastic	20
BP03-61210	SMD-SRP	White	4000K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	Plastic	20
BP03-61230	SMD-SRP	White	6500K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	Plastic	20
BP03-61800	SMD-SRP	White	3000K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	Plastic	20
BP03-61810	SMD-SRP	White	4000K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	Plastic	20
BP03-61830	SMD-SRP	White	6500K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	Plastic	20
BP03-62400	SMD-SRP	White	3000K	24W	2160Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BP03-62410	SMD-SRP	White	4000K	24W	2160Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BP03-62430	SMD-SRP	White	6500K	24W	2160Lm	220V-240VAC	>80	>0.55	110°	Plastic	10

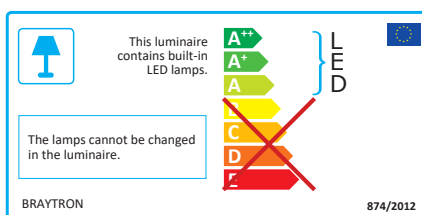

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

**Product Benefits**





- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants

**A⁺****LED****20,000 HOURS****2 YEARS WARRANTY****IP40**

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP04-61200	SMD-SRP	White	3000K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	Plastic	20
BP04-61210	SMD-SRP	White	4000K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	Plastic	20
BP04-61230	SMD-SRP	White	6500K	12W	1060Lm	220V-240VAC	>80	>0.55	110°	Plastic	20
BP04-61800	SMD-SRP	White	3000K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	Plastic	20
BP04-61810	SMD-SRP	White	4000K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	Plastic	20
BP04-61830	SMD-SRP	White	6500K	18W	1630Lm	220V-240VAC	>80	>0.55	110°	Plastic	20
BP04-62400	SMD-SRP	White	3000K	24W	2160Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BP04-62410	SMD-SRP	White	4000K	24W	2160Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BP04-62430	SMD-SRP	White	6500K	24W	2160Lm	220V-240VAC	>80	>0.55	110°	Plastic	10

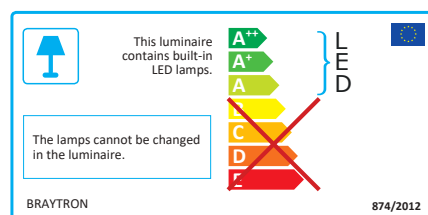


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants


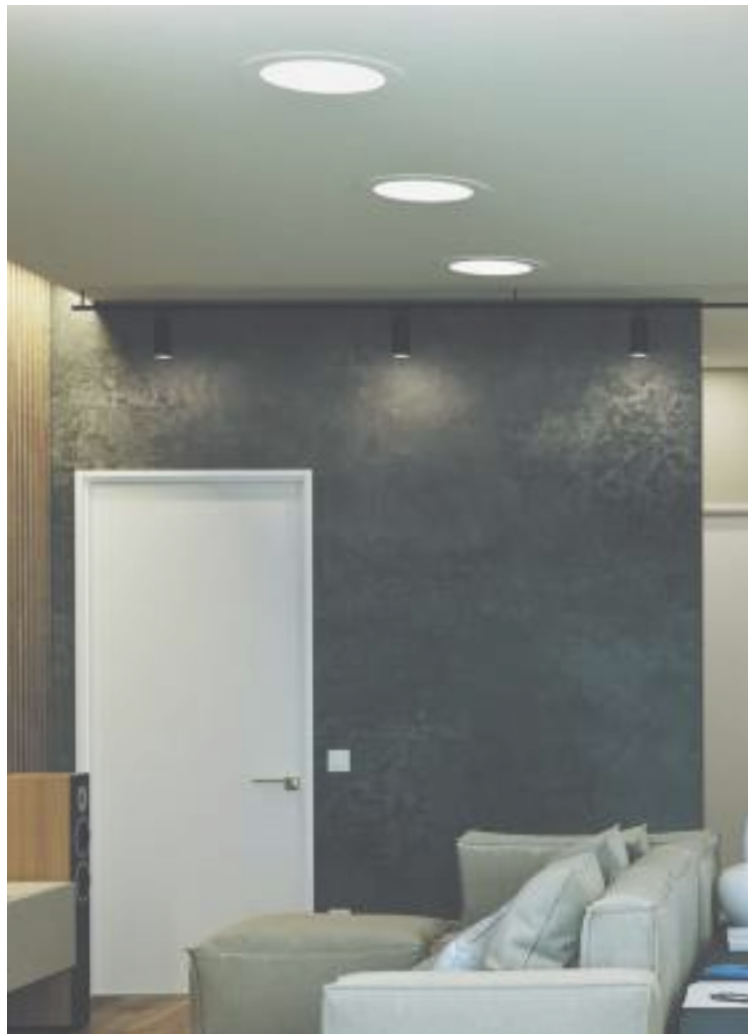


LED


20,000 HOURS

2 YEARS WARRANTY


MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BP01-30300	SMD-CRD	White	3000K	3W	150Lm	220V-240VAC	>80	>0.55	120°	Ø71	Aluminium	40
BP01-30310	SMD-CRD	White	4000K	3W	150Lm	220V-240VAC	>80	>0.55	120°	Ø71	Aluminium	40
BP01-30330	SMD-CRD	White	6500K	3W	150Lm	220V-240VAC	>80	>0.55	120°	Ø71	Aluminium	40
BP01-30600	SMD-CRD	White	3000K	6W	350Lm	220V-240VAC	>80	>0.55	120°	Ø105	Aluminium	40
BP01-30610	SMD-CRD	White	4000K	6W	350Lm	220V-240VAC	>80	>0.55	120°	Ø105	Aluminium	40
BP01-30630	SMD-CRD	White	6500K	6W	350Lm	220V-240VAC	>80	>0.55	120°	Ø105	Aluminium	40
BP01-31200	SMD-CRD	White	3000K	12W	910Lm	220V-240VAC	>80	>0.55	120°	Ø155	Aluminium	20
BP01-31210	SMD-CRD	White	4000K	12W	910Lm	220V-240VAC	>80	>0.55	120°	Ø155	Aluminium	20
BP01-31230	SMD-CRD	White	6500K	12W	910Lm	220V-240VAC	>80	>0.55	120°	Ø155	Aluminium	20

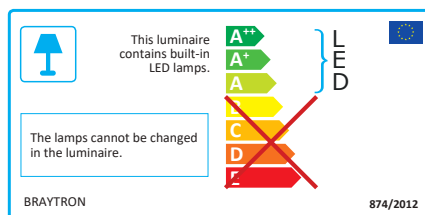


3W



6W



12W



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits



- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications


- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BP01-31500	SMD-CRD	White	3000K	15W	1120Lm	220V-240VAC	>80	>0.55	120°	Ø175	Aluminium	20
BP01-31510	SMD-CRD	White	4000K	15W	1120Lm	220V-240VAC	>80	>0.55	120°	Ø175	Aluminium	20
BP01-31530	SMD-CRD	White	6500K	15W	1120Lm	220V-240VAC	>80	>0.55	120°	Ø175	Aluminium	20
BP01-31800	SMD-CRD	White	3000K	18W	1360Lm	220V-240VAC	>80	>0.55	120°	Ø205	Aluminium	20
BP01-31810	SMD-CRD	White	4000K	18W	1360Lm	220V-240VAC	>80	>0.55	120°	Ø205	Aluminium	20
BP01-31830	SMD-CRD	White	6500K	18W	1360Lm	220V-240VAC	>80	>0.55	120°	Ø205	Aluminium	20
BP01-32400	SMD-CRD	White	3000K	24W	1850Lm	220V-240VAC	>80	>0.55	120°	Ø275	Aluminium	10
BP01-32410	SMD-CRD	White	4000K	24W	1850Lm	220V-240VAC	>80	>0.55	120°	Ø275	Aluminium	10
BP01-32430	SMD-CRD	White	6500K	24W	1850Lm	220V-240VAC	>80	>0.55	120°	Ø275	Aluminium	10

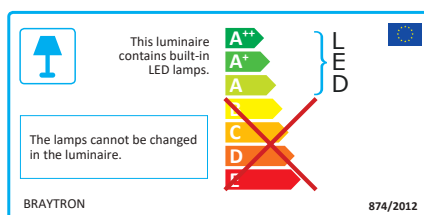


15W



18W



24W



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



LED

20,000 HOURS

2 YEARS WARRANTY



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BP02-30600	SMD-CSD	White	3000K	6W	350Lm	220V-240VAC	>80	>0.55	120°	100x100	Aluminium	40
BP02-30610	SMD-CSD	White	4000K	6W	350Lm	220V-240VAC	>80	>0.55	120°	100x100	Aluminium	40
BP02-30630	SMD-CSD	White	6500K	6W	350Lm	220V-240VAC	>80	>0.55	120°	100x100	Aluminium	40
BP02-31200	SMD-CSD	White	3000K	12W	910Lm	220V-240VAC	>80	>0.55	120°	150x150	Aluminium	20
BP02-31210	SMD-CSD	White	4000K	12W	910Lm	220V-240VAC	>80	>0.55	120°	150x150	Aluminium	20
BP02-31230	SMD-CSD	White	6500K	12W	910Lm	220V-240VAC	>80	>0.55	120°	150x150	Aluminium	20

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP20

Non-halogen

1000000 HOURS

-20°C +40°C


*Technical information indicated above may have tolerance ±10%.For final updated information please visit website www.braytron.com

**Product Benefits**




- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants

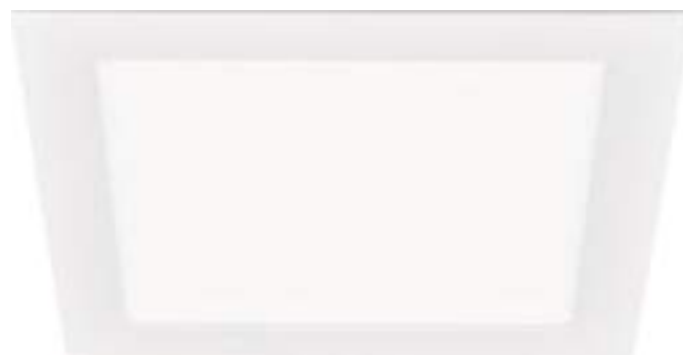

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	CUTOUT	MATERIAL	PCS/CTN
BP02-31800	SMD-CSD	White	3000K	18W	1360Lm	220V-240VAC	>80	>0.55	120°	200x200	Aluminium	20
BP02-31810	SMD-CSD	White	4000K	18W	1360Lm	220V-240VAC	>80	>0.55	120°	200x200	Aluminium	20
BP02-31830	SMD-CSD	White	6500K	18W	1360Lm	220V-240VAC	>80	>0.55	120°	200x200	Aluminium	20
BP02-32400	SMD-CSD	White	3000K	24W	1850Lm	220V-240VAC	>80	>0.55	120°	275x275	Aluminium	10
BP02-32410	SMD-CSD	White	4000K	24W	1850Lm	220V-240VAC	>80	>0.55	120°	275x275	Aluminium	10
BP02-32430	SMD-CSD	White	6500K	24W	1850Lm	220V-240VAC	>80	>0.55	120°	275x275	Aluminium	10

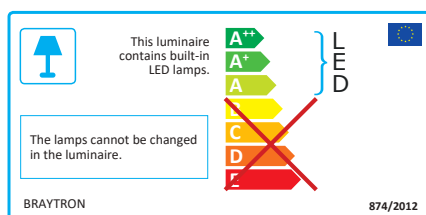

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits




- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP03-31200	SMD-SRD	White	3000K	12W	910Lm	220V-240VAC	>80	>0.55	120°	Aluminium	20
BP03-31210	SMD-SRD	White	4000K	12W	910Lm	220V-240VAC	>80	>0.55	120°	Aluminium	20
BP03-31230	SMD-SRD	White	6500K	12W	910Lm	220V-240VAC	>80	>0.55	120°	Aluminium	20
BP03-31800	SMD-SRD	White	3000K	18W	1360Lm	220V-240VAC	>80	>0.55	120°	Aluminium	20
BP03-31810	SMD-SRD	White	4000K	18W	1360Lm	220V-240VAC	>80	>0.55	120°	Aluminium	20
BP03-31830	SMD-SRD	White	6500K	18W	1360Lm	220V-240VAC	>80	>0.55	120°	Aluminium	20
BP03-32400	SMD-SRD	White	3000K	24W	1850Lm	220V-240VAC	>80	>0.55	120°	Aluminium	10
BP03-32410	SMD-SRD	White	4000K	24W	1850Lm	220V-240VAC	>80	>0.55	120°	Aluminium	10
BP03-32430	SMD-SRD	White	6500K	24W	1850Lm	220V-240VAC	>80	>0.55	120°	Aluminium	10
BP03-33600	SMD-SRD	White	3000K	36W	2500Lm	220V-240VAC	>80	>0.95	120°	Aluminium	10
BP03-33610	SMD-SRD	White	4000K	36W	2500Lm	220V-240VAC	>80	>0.95	120°	Aluminium	10
BP03-33630	SMD-SRD	White	6500K	36W	2500Lm	220V-240VAC	>80	>0.95	120°	Aluminium	10

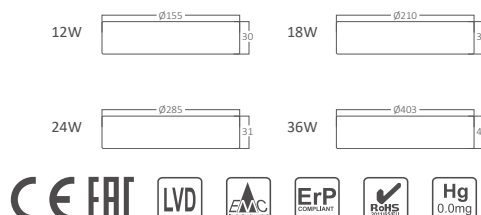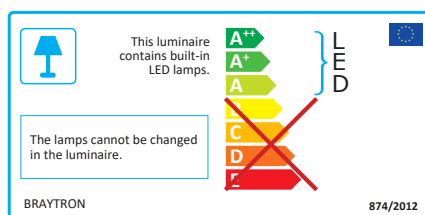

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

**Product Benefits**




- Easy & quick installation
- Energy efficient and long lasting
- Excellent color rendering index(CRI)
- Saves up to %80 Energy
- No UV and IR radiation
- Tool free installation
- Suitable for Ceiling use

Applications

- General indoor lighting
- Shops, offices
- Hotels, hospitals
- Homes, living areas
- Schools, showrooms
- Cafe, restaurants



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BP04-31200	SMD-SRD	White	3000K	12W	910Lm	220V-240VAC	>80	>0.55	120°	Aluminium	20
BP04-31210	SMD-SRD	White	4000K	12W	910Lm	220V-240VAC	>80	>0.55	120°	Aluminium	20
BP04-31230	SMD-SRD	White	6500K	12W	910Lm	220V-240VAC	>80	>0.55	120°	Aluminium	20
BP04-31800	SMD-SRD	White	3000K	18W	1360Lm	220V-240VAC	>80	>0.55	120°	Aluminium	20
BP04-31810	SMD-SRD	White	4000K	18W	1360Lm	220V-240VAC	>80	>0.55	120°	Aluminium	20
BP04-31830	SMD-SRD	White	6500K	18W	1360Lm	220V-240VAC	>80	>0.55	120°	Aluminium	20
BP04-32400	SMD-SRD	White	3000K	24W	1850Lm	220V-240VAC	>80	>0.55	120°	Aluminium	10
BP04-32410	SMD-SRD	White	4000K	24W	1850Lm	220V-240VAC	>80	>0.55	120°	Aluminium	10
BP04-32430	SMD-SRD	White	6500K	24W	1850Lm	220V-240VAC	>80	>0.55	120°	Aluminium	10
BP04-33600	SMD-SRD	White	3000K	36W	2500Lm	220V-240VAC	>80	>0.95	120°	Aluminium	10
BP04-33610	SMD-SRD	White	4000K	36W	2500Lm	220V-240VAC	>80	>0.95	120°	Aluminium	10
BP04-33630	SMD-SRD	White	6500K	36W	2500Lm	220V-240VAC	>80	>0.95	120°	Aluminium	10

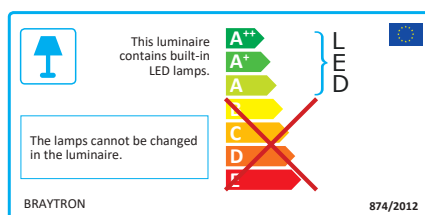

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



- GU10 RECESSED SPOT LIGHT FITTINGS
- GU10 SURFACE SPOT LIGHT FITTINGS
- CEILING SPOTLIGHT FIXTURE

**Product Benefits**

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- General indoor lighting
- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas

2 YEARS
WARRANTY

	MODEL NO	MODEL NO	MODEL NO
	BH04-00400	BH04-00401	BH04-00406
TYPE	Beta-PD	Beta-PD	Beta-PD
SOCKET	GU10	GU10	GU10
BODY COLOR	White	Black	Golden
MAX. WATT	35W	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC	220V-240VAC
MATERIAL	Aluminium	Aluminium	Aluminium
PCS/CTN	12	12	12

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

The LED lamps cannot be changed in the luminaire.

A++
A+
A
B
C
D
E

LED

BRAYTRON

874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- General indoor lighting
- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



	MODEL NO	MODEL NO
	BH04-00100	BH04-00101
TYPE	Beta-SR	Beta-SR
SOCKET	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
MATERIAL	Aluminium	Aluminium
PCS/CTN	20	20

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:



A++
A+
A
B
C
D
E

LED


The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

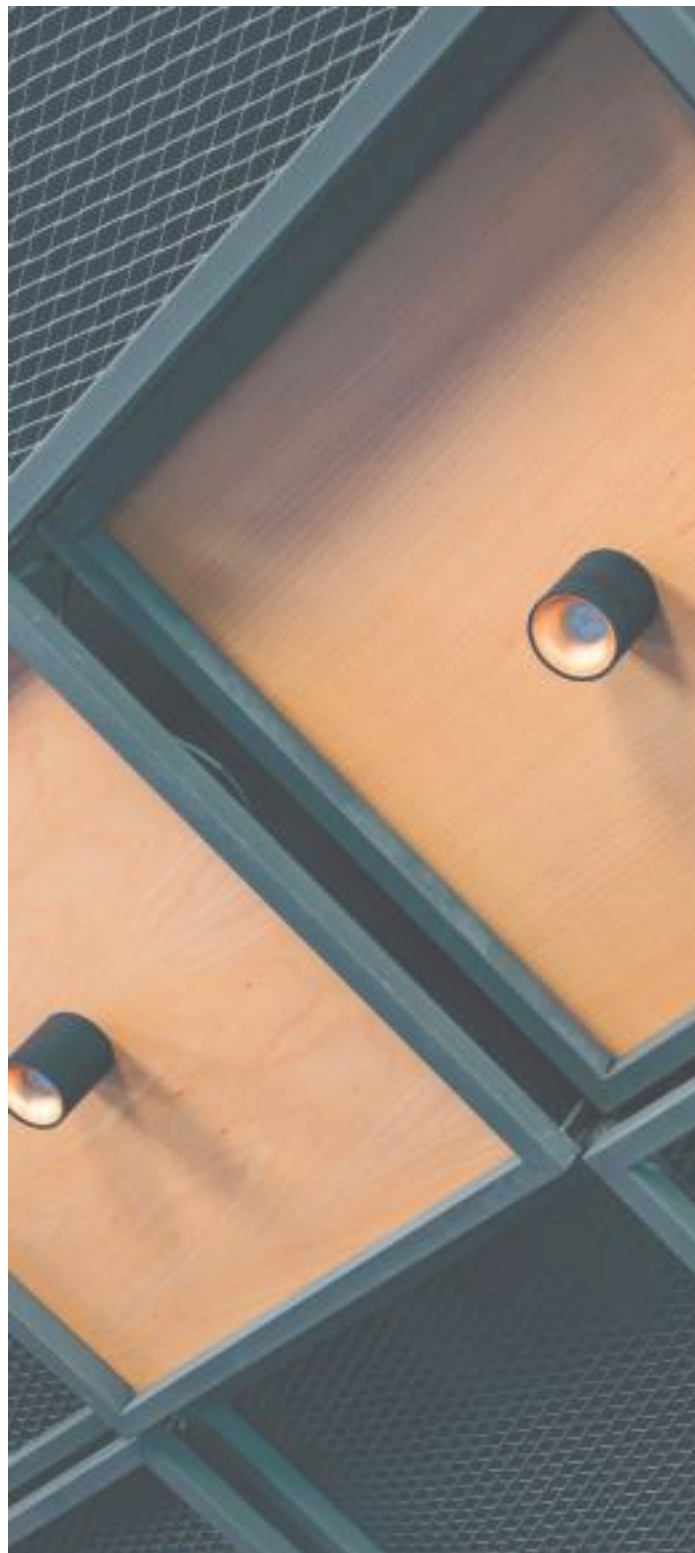

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

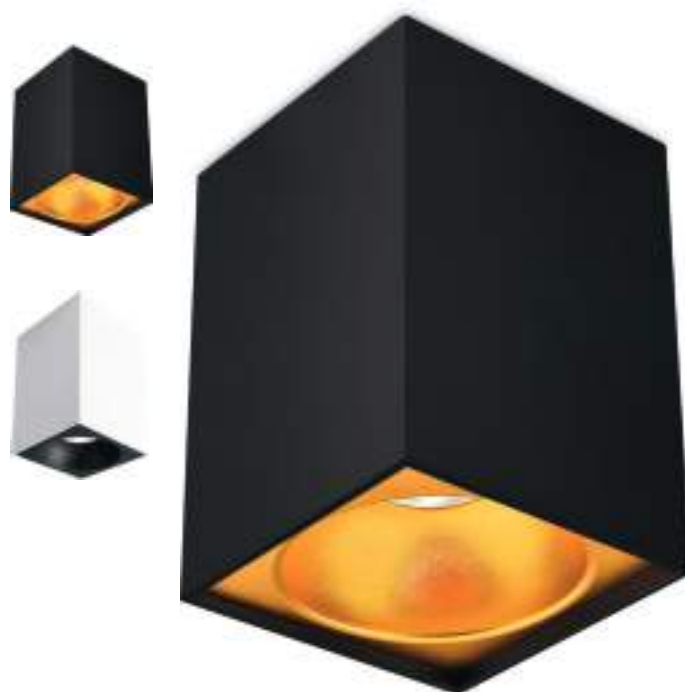

Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use



Applications

- General indoor lighting
- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH04-00110	BH04-00111
TYPE	Beta-SS	Beta-SS
SOCKET	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
MATERIAL	Aluminium	Aluminium
PCS/CTN	20	20

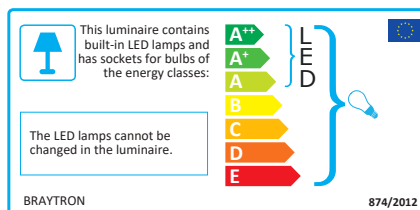

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- General indoor lighting
- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



	MODEL NO	MODEL NO
	BH04-00200	BH04-00201
TYPE	Gama-SR	Gama-SR
SOCKET	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
MATERIAL	Aluminium	Aluminium
PCS/CTN	20	20

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:


A++
A+
A
B
C
D
E

LED

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use



Applications

- General indoor lighting
- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH04-00210	BH04-00211
TYPE	Gama-SS	Gama-SS
SOCKET	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
MATERIAL	Aluminium	Aluminium
PCS/CTN	20	20

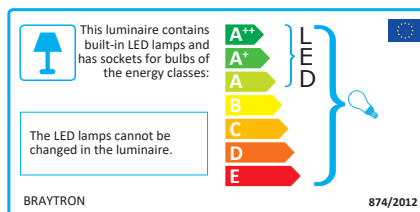

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- General indoor lighting
- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



	MODEL NO	MODEL NO	MODEL NO
	BH04-00300	BH04-00301	BH04-00306
TYPE	Gama-SRM	Gama-SRM	Gama-SRM
SOCKET	GU10	GU10	GU10
BODY COLOR	White	Black	Golden
MAX. WATT	35W	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC	220V-240VAC
MATERIAL	Aluminium	Aluminium	Aluminium
PCS/CTN	20	20	20

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:


A++
A+
A
B
C
D
E

LED

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use



Applications

- General indoor lighting
- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO	MODEL NO
	BH04-00310	BH04-00311	BH04-00316
TYPE	Gama-SSM	Gama-SSM	Gama-SSM
SOCKET	GU10	GU10	GU10
BODY COLOR	White	Black	Golden
MAX. WATT	35W	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC	220V-240VAC
MATERIAL	Aluminium	Aluminium	Aluminium
PCS/CTN	20	20	20

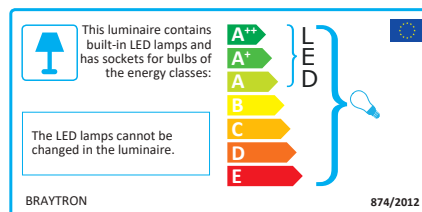

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- General indoor lighting
- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH04-00710	BH04-00711
TYPE	Beta-SRD-1	Beta-SRD-1
SOCKET	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
MATERIAL	Aluminium	Aluminium
PCS/CTN	12	12

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:


A++
A+
A
B
C
D
E

LED

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance ± 10 . For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- General indoor lighting
- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS WARRANTY

	MODEL NO	MODEL NO
	BH04-00810	BH04-00811
TYPE	Beta-SRQ-1	Beta-SRQ-1
SOCKET	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
MATERIAL	Aluminium	Aluminium
PCS/CTN	16	16



This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

The LED lamps cannot be changed in the luminaire.


A++
A+
A
B
C
D
E

LED





874/2012



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- General indoor lighting
- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



Suitable For
GU10 BULB
50mm

	MODEL NO	MODEL NO
	BH04-00820	BH04-00821
TYPE	Beta-SRQ-2	Beta-SRQ-2
SOCKET	2xGU10	2xGU10
BODY COLOR	White	Black
MAX. WATT	2x35W	2x35W
VOLTAGE	220V-240VAC	220V-240VAC
MATERIAL	Aluminium	Aluminium
PCS/CTN	12	12

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

A++

A+

A

B

C

D


E

LED

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use



Applications

- General indoor lighting
- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH04-00830	BH04-00831
TYPE	Beta-SRQ-3	Beta-SRQ-3
SOCKET	3xGU10	3xGU10
BODY COLOR	White	Black
MAX. WATT	3x35W	3x35W
VOLTAGE	220V-240VAC	220V-240VAC
MATERIAL	Aluminium	Aluminium
PCS/CTN	6	6

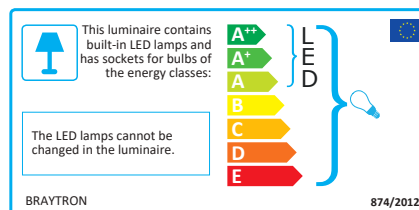

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Excellent finish
- Anti-glare design
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use



Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO	MODEL NO	MODEL NO	MODEL NO
	BH03-06010	BH03-06011	BH03-06013	BH03-06015	BH03-06016
TYPE	Alfa-RR	Alfa-RR	Alfa-RR	Alfa-RR	Alfa-RR
SOCKET	GU10	GU10	GU10	GU10	GU10
BODY COLOR	White	Black	Silver	Chrome	Golden
MAX. WATT	35W	35W	35W	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC	220V-240VAC	220V-240VAC	220V-240VAC
MATERIAL	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
PCS/CTN	100	100	100	100	100

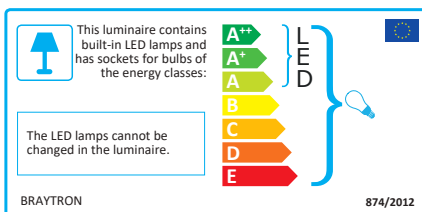

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use



Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-07010	BH03-07011
TYPE	Alfa-SR	Alfa-SR
BULB TYPE	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	Ø88	Ø88
MATERIAL	Aluminium	Aluminium
PCS/CTN	60	60

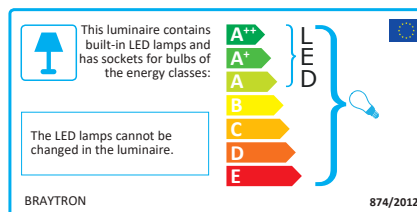

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Excellent finish
- Anti-glare design
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-07020	BH03-07021
TYPE	Alfa-SS	Alfa-SS
BULB TYPE	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	88x88	88x88
MATERIAL	Aluminium	Aluminium
PCS/CTN	60	60

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:


A++
A+
A
B
C
D
E

LED

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012





Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS WARRANTY	MODEL NO	MODEL NO
	BH03-05110	BH03-05116
TYPE	Beta-RR	Beta-RR
BULB TYPE	GU10	GU10
BODY COLOR	White+Black	Black+Golden
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	Ø75	Ø75
MATERIAL	Aluminium	Aluminium
PCS/CTN	50	50



This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

The LED lamps cannot be changed in the luminaire.


A++
A+
A
B
C
D
E

LED





874/2012



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Excellent finish
- Anti-glare design
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-05010	BH03-05011
TYPE	Beta-RR1	Beta-RR1
BULB TYPE	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	Ø90	Ø90
MATERIAL	Aluminium	Aluminium
PCS/CTN	50	50

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

A++

A+

A

B

C

D


E

LED

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use



Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-05020	BH03-05021
TYPE	Beta-RS1	Beta-RS1
BULB TYPE	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	90x90	90x90
MATERIAL	Aluminium	Aluminium
PCS/CTN	50	50

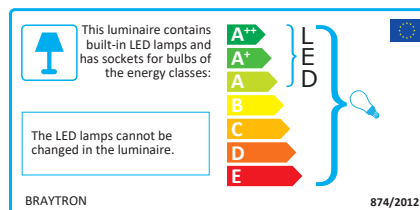

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Excellent finish
- Anti-glare design
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-05030	BH03-05031
TYPE	Beta-RS2	Beta-RS2
BULB TYPE	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	2x35W	2x35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	90x170	90x170
MATERIAL	Aluminium	Aluminium
PCS/CTN	20	20

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:


A++
A+
A
B
C
D
E

LED

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



	MODEL NO	MODEL NO
	BH03-04010	BH03-04020
TYPE	Tetra-CR-Round	Tetra-CR-Square
BULB TYPE	GU10	GU10
BODY COLOR	White	White
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	Ø92	92
MATERIAL	Aluminium	Aluminium
PCS/CTN	100	50

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

A++

A+

A

B

C

D


E

LED

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Excellent finish
- Anti-glare design
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-04090	BH03-04091
TYPE	Tetra-CF-Round	Tetra-CF-Round
BULB TYPE	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	Ø76	Ø76
MATERIAL	Aluminium	Aluminium
PCS/CTN	50	50

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:


A++
A+
A
B
C
D
E

LED

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use



Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-04100	BH03-04101
TYPE	Tetra-CF-Square	Tetra-CF-Square
BULB TYPE	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	75	75
MATERIAL	Aluminium	Aluminium
PCS/CTN	50	50

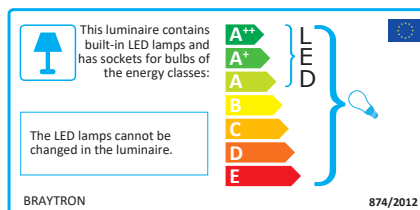

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Excellent finish
- Anti-glare design
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS WARRANTY

	MODEL NO	MODEL NO
	BH03-04050	BH03-04051
TYPE	Tetra-E-Round	Tetra-E-Round
BULB TYPE	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	Ø73	Ø73
MATERIAL	Aluminium	Aluminium
PCS/CTN	100	100

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:


The LED lamps cannot be changed in the luminaire.

BRAYTRON


A++
A+
A
B
C
D
E

LED

874/2012



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use



Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-04040	BH03-04041
TYPE	Tetra-D-Square	Tetra-D-Square
BULB TYPE	GU10	GU10
BODY COLOR	White	Black
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	Ø75	Ø75
MATERIAL	Aluminium	Aluminium
PCS/CTN	100	100

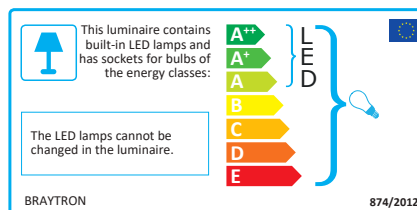

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Excellent finish
- Anti-glare design
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-04070	BH03-04080
TYPE	Tetra-H-Round	Tetra-G-Square
BULB TYPE	GU10	GU10
BODY COLOR	White	White
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	Ø87	Ø87
MATERIAL	Aluminium	Aluminium
PCS/CTN	50	40

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:


A++
A+
A
B
C
D
E

LED

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance ± 10 . For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use



Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas


2 YEARS
WARRANTY

IP54

	MODEL NO	MODEL NO
	BH03-02090	BH03-02094
TYPE	Mitto-IP	Mitto-IP
BULB TYPE	GU10	GU10
BODY COLOR	White	Nickel
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	Ø75	Ø75
MATERIAL	Aluminium	Aluminium
PCS/CTN	50	50

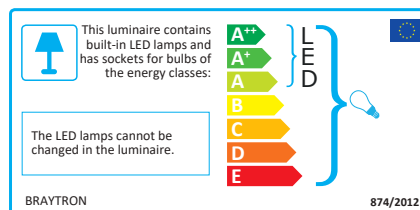

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Excellent finish
- Anti-glare design
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-00161	BH03-00163
TYPE	Spotti-S	Spotti-S
BULB TYPE	GU10	GU10
BODY COLOR	Black Silver	Brushed Silver
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	Ø75	Ø75
MATERIAL	Aluminium	Aluminium
PCS/CTN	50	50

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

A++

A+

A

B

C

D



E

LED


The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

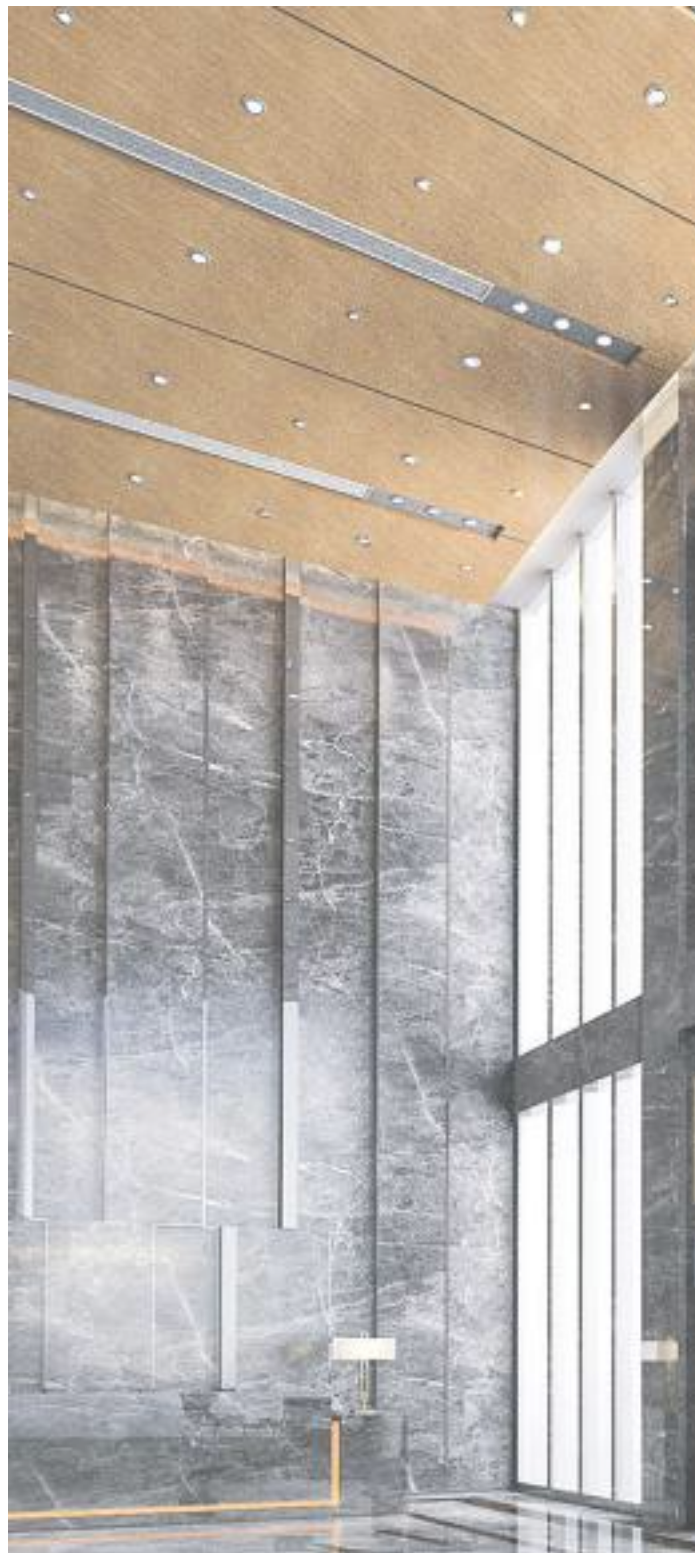

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

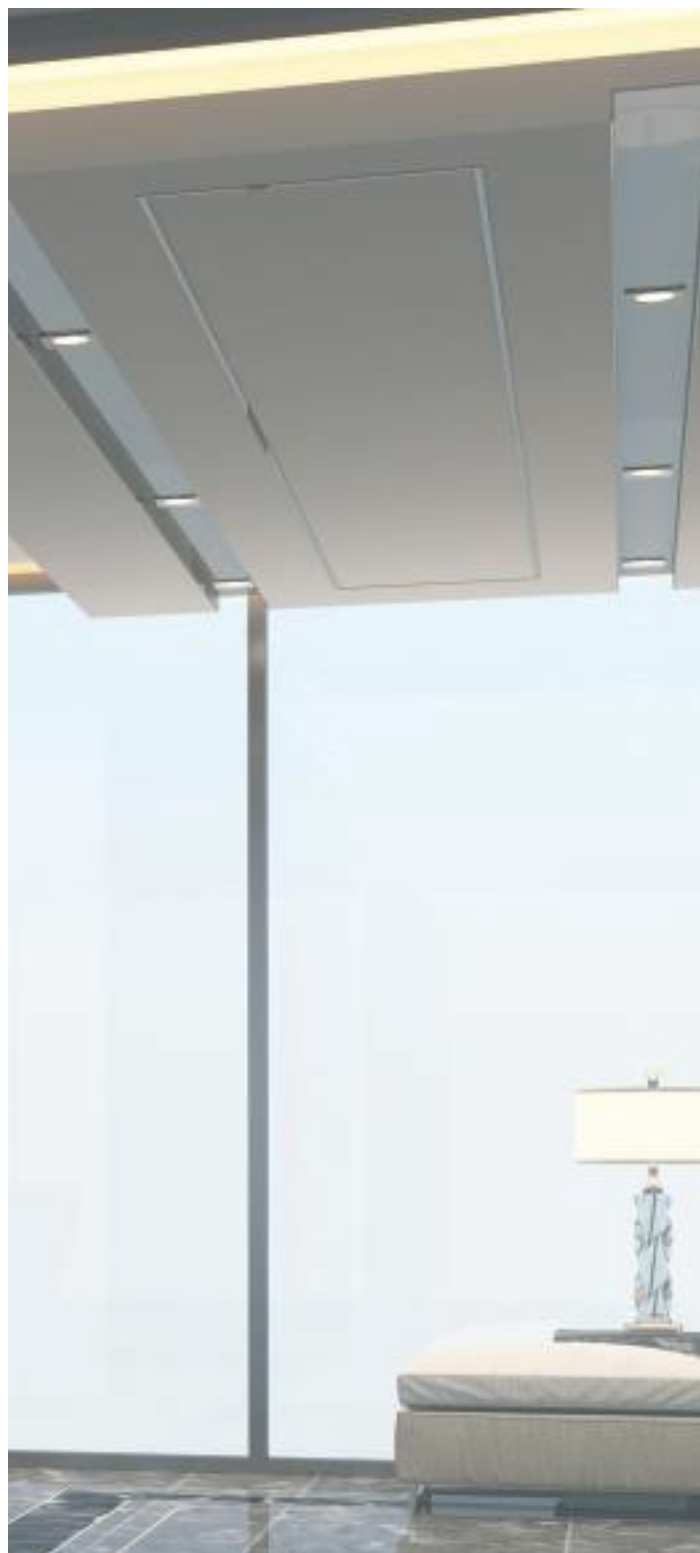

Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use



Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-00111	BH03-00113
TYPE	Spotti-S	Spotti-S
BULB TYPE	GU10	GU10
BODY COLOR	Black Silver	Brushed Silver
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	Ø80	Ø80
MATERIAL	Aluminium	Aluminium
PCS/CTN	50	50

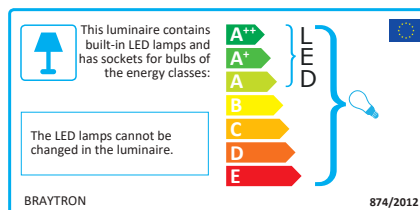

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Excellent finish
- Anti-glare design
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-00121	BH03-00123
TYPE	Spotti-S	Spotti-S
BULB TYPE	GU10	GU10
BODY COLOR	Black Silver	Brushed Silver
MAX. WATT	2x35W	2x35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	80x150	80x150
MATERIAL	Aluminium	Aluminium
PCS/CTN	20	20

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

A++

A+

A

B

C

D


E

LED


The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

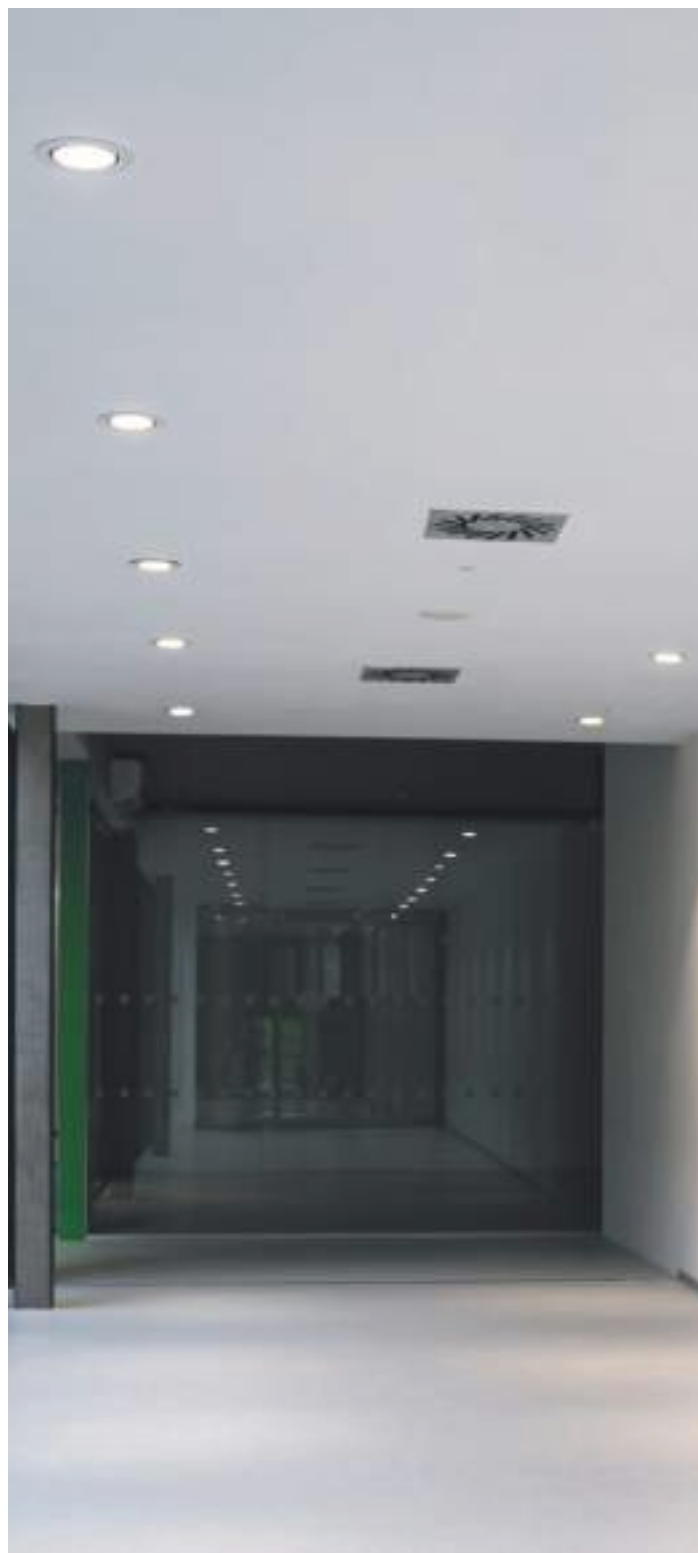

Product Benefits

- Easy & quick installation
- Excellent finish
- Built in GU10 socket
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use



Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-02070	BH03-02074
TYPE	Mitto-R	Mitto-R
BULB TYPE	GU10	GU10
BODY COLOR	White	Nickel
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	Ø75	Ø75
MATERIAL	Aluminium	Aluminium
PCS/CTN	100	100

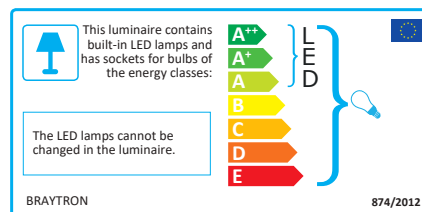

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Excellent finish
- Anti-glare design
- Suitable for GU10 bulb
- Made of aluminium body
- Tool free bulb installation
- Suitable for indoor ceiling use

Applications

- Showrooms
- Shops, offices
- Cafes
- restaurants
- hotels
- General living areas



2 YEARS
WARRANTY

	MODEL NO	MODEL NO
	BH03-02040	BH03-02044
TYPE	Mitto-S	Mitto-S
BULB TYPE	GU10	GU10
BODY COLOR	White	Nickel
MAX. WATT	35W	35W
VOLTAGE	220V-240VAC	220V-240VAC
CUTOUT	Ø75	Ø75
MATERIAL	Aluminium	Aluminium
PCS/CTN	100	100

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:


A++
A+
A
B
C
D
E

LED

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



- LED MIRROR LAMP
- LED WALL & CEILING LIGHT

Features

- Easy & quick installation
- Energy efficient and long lasting
- Homogeneous illuminance
- Made of aluminium die-cast body
- Polycarbonat diffuser
- Optional Dimmable driver
- Built-in driver
- Suitable for ceiling and pendant use

Applications


- Shops
- Offices
- Hotels
- Schools
- Hospitals
- Showrooms
- Cafe & restaurants
- Living areas



Powered by
SAMSUNG LED TRIDONIC




MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	Size (mm)
BN02-00601	Linear	Black	3000K	18W	1620Lm	220V-240VAC	>80	>0.55	120°	Aluminium	50x70x570
BN02-00611	Linear	Black	4000K	18W	1620Lm	220V-240VAC	>80	>0.55	120°	Aluminium	50x70x570
BN02-00631	Linear	Black	6500K	18W	1620Lm	220V-240VAC	>80	>0.55	120°	Aluminium	50x70x570
BN02-01201	Linear	Black	3000K	36W	3240Lm	220V-240VAC	>80	>0.95	120°	Aluminium	50x70x1130
BN02-01211	Linear	Black	4000K	36W	3240Lm	220V-240VAC	>80	>0.95	120°	Aluminium	50x70x1130
BN02-01231	Linear	Black	6500K	36W	3240Lm	220V-240VAC	>80	>0.95	120°	Aluminium	50x70x1130
BN02-01501	Linear	Black	3000K	45W	4050Lm	220V-240VAC	>80	>0.95	120°	Aluminium	50x70x1420
BN02-01511	Linear	Black	4000K	45W	4050Lm	220V-240VAC	>80	>0.95	120°	Aluminium	50x70x1420
BN02-01531	Linear	Black	6500K	45W	4050Lm	220V-240VAC	>80	>0.95	120°	Aluminium	50x70x1420

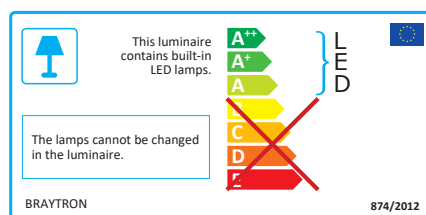

Optional Accessories

- Optional Body Color
- Optional Different Size
- Optional Hanging Accessories (2Mt)
- Optional Emergency Kits
- Optional DALI DIM

! Special production is done in desired size and color.



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Energy efficient and long lasting
- Homogeneous illuminance
- Made of aluminium die-cast body
- Polycarbonat diffuser
- Optional Dimmable driver
- Built-in driver
- Suitable for ceiling and pendant use

Applications

- Shops
- Offices
- Hotels
- Schools
- Hospitals
- Showrooms
- Cafe & restaurants
- Living areas




Powered by

SAMSUNG LED TRIDONIC




MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	Size (mm)
BN02-00600	Linear	White	3000K	18W	1620Lm	220V-240VAC	>80	>0.55	120°	Aluminium	50x70x570
BN02-00610	Linear	White	4000K	18W	1620Lm	220V-240VAC	>80	>0.55	120°	Aluminium	50x70x570
BN02-00630	Linear	White	6500K	18W	1620Lm	220V-240VAC	>80	>0.55	120°	Aluminium	50x70x570
BN02-01200	Linear	White	3000K	36W	3240Lm	220V-240VAC	>80	>0.95	120°	Aluminium	50x70x1130
BN02-01210	Linear	White	4000K	36W	3240Lm	220V-240VAC	>80	>0.95	120°	Aluminium	50x70x1130
BN02-01230	Linear	White	6500K	36W	3240Lm	220V-240VAC	>80	>0.95	120°	Aluminium	50x70x1130
BN02-01500	Linear	White	3000K	45W	4050Lm	220V-240VAC	>80	>0.95	120°	Aluminium	50x70x1420
BN02-01510	Linear	White	4000K	45W	4050Lm	220V-240VAC	>80	>0.95	120°	Aluminium	50x70x1420
BN02-01530	Linear	White	6500K	45W	4050Lm	220V-240VAC	>80	>0.95	120°	Aluminium	50x70x1420

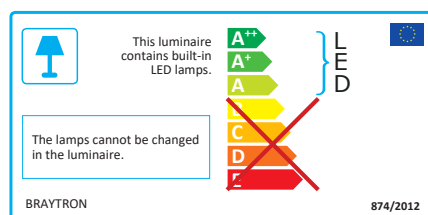

Optional Accessories

- Optional Body Color
- Optional Different Size
- Optional Hanging Accessories (2Mt)
- Optional Emergency Kits
- Optional DALI DIM

! Special production is done in desired size and color.



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Homogenous illuminance
- Aesthetic Design
- Ingress Protection against water
- Suitable for wall and ceiling use

Applications

- General indoor lighting
- Living rooms
- offices
- Bathrooms
- Mirrors
- General living areas



LED

20.000 HOURS

2 YEARS WARRANTY


MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BN12-00603	Mirrora	White	3000K	10W	900Lm	220V-240VAC	>80	>0.55	110°	Aluminium	10
BN12-00613	Mirrora	White	4000K	10W	900Lm	220V-240VAC	>80	>0.55	110°	Aluminium	10
BN12-00633	Mirrora	White	6500K	10W	900Lm	220V-240VAC	>80	>0.55	110°	Aluminium	10

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED

874/2012



CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS EXEMPTED

Hg 0.0mg


IP 20

Non-flammable

UL94 V-0

25,000

-20°C +40°C



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Features




- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Homogenous illuminance
- Built in driver
- Linkable connection
- Suitable for indoor ceiling & wall use

Application

- General indoor lighting
- Kitchen furniture lighting
- Hiddle lighting
- General living areas



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BN10-00400	Ledline	White	3000K	4W	400Lm	220V-240VAC	>80	>0.55	110°	Aluminium	30
BN10-00410	Ledline	White	4000K	4W	400Lm	220V-240VAC	>80	>0.55	110°	Aluminium	30
BN10-00430	Ledline	White	6500K	4W	400Lm	220V-240VAC	>80	>0.55	110°	Aluminium	30
BN10-00700	Ledline	White	3000K	7W	780Lm	220V-240VAC	>80	>0.55	110°	Aluminium	30
BN10-00710	Ledline	White	4000K	7W	780Lm	220V-240VAC	<80	>0.55	110°	Aluminium	30
BN10-00730	Ledline	White	6500K	7W	780Lm	220V-240VAC	>80	>0.55	110°	Aluminium	30
BN10-01100	Ledline	White	3000K	11W	1120Lm	220V-240VAC	>80	>0.55	110°	Aluminium	30
BN10-01110	Ledline	White	4000K	11W	1120Lm	220V-240VAC	<80	>0.55	110°	Aluminium	30
BN10-01130	Ledline	White	6500K	11W	1120Lm	220V-240VAC	>80	>0.55	110°	Aluminium	30
BN10-01400	Ledline	White	3000K	14W	1500Lm	220V-240VAC	>80	>0.55	110°	Aluminium	30
BN10-01410	Ledline	White	4000K	14W	1500Lm	220V-240VAC	>80	>0.55	110°	Aluminium	30
BN10-01430	Ledline	White	6500K	14W	1500Lm	220V-240VAC	>80	>0.55	110°	Aluminium	30

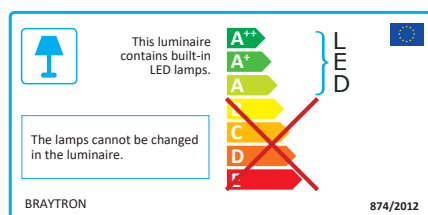

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Homogeneous illuminance
- Smart product for tool-free installation
- Made of high grade Polycarbonat
- extrusion
- Built-in driver
- Suitable for wall and ceiling use

Applications

- General indoor lighting
- Indoor car park
- Industrial halls
- Industrial showrooms
- Production lines
- Offices
- Showrooms



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BN18-00630	Proline-PL	White	6500K	18W	1900Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BN18-01230	Proline-PL	White	6500K	36W	3200Lm	220V-240VAC	>80	>0.95	110°	Plastic	10



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.


BRAYTRON




LED




874/2012



18W



36W



*Technical information indicated above may have tolerance ±10%.For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Energy efficient and long lasting
- Homogeneous illuminance
- Smart product for tool-free installation
- Made of aluminium extrusion
- Polycarbonat diffuser
- Built-in driver
- Suitable for wall and ceiling use

Applications

- General indoor lighting
- Indoor car park
- Industrial halls
- Long distance linear lighting
- Industrial showrooms
- Production lines
- Offices
- Showrooms






LED

20,000 HOURS

2 YEARS WARRANTY

100Lm/w

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BN20-00613	Proline-P	Silver	4000K	20W	2000Lm	220V-240VAC	>80	>0.55	110°	Aluminium	10
BN20-00633	Proline-P	Silver	6500K	20W	2000Lm	220V-240VAC	>80	>0.55	110°	Aluminium	10
BN20-01213	Proline-P	Silver	4000K	40W	4000Lm	220V-240VAC	>80	>0.95	110°	Aluminium	10
BN20-01233	Proline-P	Silver	6500K	40W	4000Lm	220V-240VAC	>80	>0.95	110°	Aluminium	10

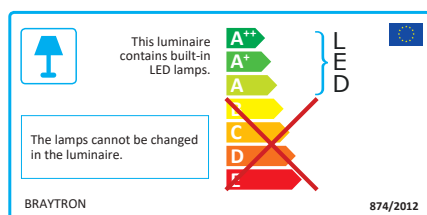

CE ENEC

LVD

EMC

ErP

RoHS

Hg 0.0mg

IP 20

No Mercury



> 25,000

-20°C ~ +40°C

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




- DECORATIVE CEILING FIXTURE



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




JADE-SS • BH16-03280
3CCT IN ONE
White
LED 24W 1680 Lümen
230Volt IP20 Iron+PS



JADE-SS • BH16-03480
3CCT IN ONE
White
LED 40W 3020 Lümen
230Volt IP20 Iron+PS




JADE-SS • BH16-03490
3CCT IN ONE - With Remote
White
LED 40W 3020 Lümen
230Volt IP20 Iron+PS






JADE-SS • BH16-03580
3CCT IN ONE
White
LED 50W 4200 Lümen
230Volt IP20 Iron+PS



JADE-SS • BH16-03590
3CCT IN ONE - With Remote
White
LED 50W 4200 Lümen
230Volt IP20 Iron+PS




*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

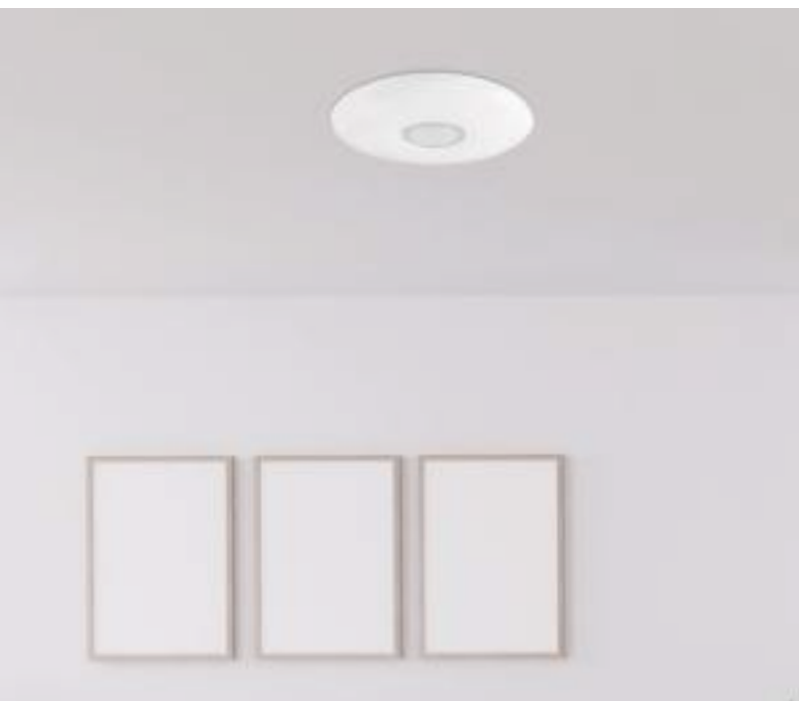


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




JADE-SRC • BH16-10480
LED 3CCT IN ONE
White
LED 24W 1680 Lümen
230Volt IP20 Iron+PS



JADE-SRC • BH16-10580
LED 3CCT IN ONE
White
LED 36W 2680 Lümen
230Volt IP20 Iron+PS




JADE-SRC • BH16-10590
LED 3CCT IN ONE - With Remote
White
LED 36W 2680 Lümen
230Volt IP20 Iron+PS




*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



JADE-SRD • BH16-10780
 LED
 3CCT IN ONE
 White
 LED 24W 1680 Lümen
 230Volt IP20 Iron+PS
 A+




JADE-SRD • BH16-10890
 LED
 3CCT IN ONE - With Remote
 White
 LED 36W 2680 Lümen
 230Volt IP20 Iron+PS
 A+



JADE-SRE • BH16-10980
 LED
 3CCT IN ONE
 White
 LED 36W 2680 Lümen
 230Volt IP20 Iron+PS
 A+

JADE-SRE • BH16-10990
 LED
 3CCT IN ONE - With Remote
 White
 LED 36W 2680 Lümen
 230Volt IP20 Iron+PS



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



BLADE-SR • BH16-04180
3CCT IN ONE
White
LED 36W 3020 Lümen
230Volt IP20 Iron+PS



BLADE-SR • BH16-04181
3CCT IN ONE
Black
LED 36W 3020 Lümen
230Volt IP20 Iron+PS



BLADE-SR • BH16-04187
3CCT IN ONE
Wooden
LED 36W 3020 Lümen
230Volt IP20 Iron+PS



PENDANT KIT • BLADE-SR
White • SH16-05001
PENDANT KIT • BLADE-SR
Black • SH16-05002
PENDANT KIT • BLADE-SR
Wooden • SH16-05003



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



BLADE-SR • BH16-04280
3CCT IN ONE
White
LED 45W 3680 Lümen
230Volt IP20 Iron+PS

BLADE-SR • BH16-04290
3CCT IN ONE - With Remote
White
LED 45W 3680 Lümen
230Volt IP20 Iron+PS



BLADE-SR • BH16-04281
3CCT IN ONE
Black
LED 45W 3680 Lümen
230Volt IP20 Iron+PS

BLADE-SR • BH16-04291
3CCT IN ONE - With Remote
Black
LED 45W 3680 Lümen
230Volt IP20 Iron+PS



PENDANT KIT • BLADE-SR
White • SH16-05001

PENDANT KIT • BLADE-SR
Black • SH16-05002

PENDANT KIT • BLADE-SR
Wooden • SH16-05003



BLADE-SR • BH16-04287
3CCT IN ONE
Wooden
LED 45W 3680 Lümen
230Volt IP20 Iron+PS

BLADE-SR • BH16-04297
3CCT IN ONE - With Remote
Wooden
LED 45W 3680 Lümen
230Volt IP20 Iron+PS



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



LED

A+

BLADE-SS • BH16-05180
3CCT IN ONE
White
LED 36W 3020 Lümen
230Volt IP20 Iron+PS

LED

A+

BLADE-SS • BH16-05181
3CCT IN ONE
Black
LED 36W 3020 Lümen
230Volt IP20 Iron+PS



LED

A+

BLADE-SS • BH16-05187
3CCT IN ONE
Wooden
LED 36W 3020 Lümen
230Volt IP20 Iron+PS

PENDANT KIT • BLADE-SS
White • SH16-05004

PENDANT KIT • BLADE-SS
Black • SH16-05005

PENDANT KIT • BLADE-SS
Wooden • SH16-05006



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



BLADE-SS • BH16-05280
3CCT IN ONE
White
LED 45W 3680 Lümen
230Volt IP20 Iron+PS

BLADE-SS • BH16-05290
3CCT IN ONE - With Remote
White
LED 45W 3680 Lümen
230Volt IP20 Iron+PS



BLADE-SS • BH16-05281
3CCT IN ONE
Black
LED 45W 3680 Lümen
230Volt IP20 Iron+PS

BLADE-SS • BH16-05291
3CCT IN ONE - With Remote
Black
LED 45W 3680 Lümen
230Volt IP20 Iron+PS



PENDANT KIT • BLADE-SS
White • SH16-05004

PENDANT KIT • BLADE-SS
Black • SH16-05005

PENDANT KIT • BLADE-SS
Wooden • SH16-05006



BLADE-SS • BH16-05287
3CCT IN ONE
Wooden
LED 45W 3680 Lümen
230Volt IP20 Iron+PS


BLADE-SS • BH16-05297
3CCT IN ONE - With Remote
Wooden
LED 45W 3680 Lümen
230Volt IP20 Iron+PS




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




BLADE-PD • BH16-06180
LED 3CCT IN ONE
White
LED 36W 3240 Lümen
230Volt IP20 Iron+PS



BLADE-PD • BH16-06181
LED 3CCT IN ONE
Black
LED 36W 3240 Lümen
230Volt IP20 Iron+PS



BLADE-SS • BH16-05187
LED 3CCT IN ONE
Wooden
LED 36W 3020 Lümen
230Volt IP20 Iron+PS



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



BLADE-PD • BH16-06280
 3CCT IN ONE
 White
 LED 45W 4050 Lümen
 230Volt IP20 Iron+PS

BLADE-PD • BH16-06290
 3CCT IN ONE - With Remote
 White
 LED 45W 4050 Lümen
 230Volt IP20 Iron+PS



BLADE-PD • BH16-06281
 3CCT IN ONE
 Black
 LED 45W 4050 Lümen
 230Volt IP20 Iron+PS

BLADE-PD • BH16-06291
 3CCT IN ONE - With Remote
 Black
 LED 45W 4050 Lümen
 230Volt IP20 Iron+PS



BLADE-PD • BH16-06287
 3CCT IN ONE
 Wooden
 LED 45W 4050 Lümen
 230Volt IP20 Iron+PS


BLADE-PD • BH16-06297
 3CCT IN ONE - With Remote
 Wooden
 LED 45W 4050 Lümen
 230Volt IP20 Iron+PS




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




BLADE-PD • BH16-07180
3CCT IN ONE
White
LED 36W 3240 Lümen
230Volt IP20 Iron+PS



BLADE-PD • BH16-07181
3CCT IN ONE
Black
LED 36W 3240 Lümen
230Volt IP20 Iron+PS



BLADE-PD • BH16-07187
3CCT IN ONE
Wooden
LED 36W 3240 Lümen
230Volt IP20 Iron+PS



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



BLADE-PD • BH16-07280
3CCT IN ONE
White
LED 45W 4050 Lümen
230Volt IP20 Iron+PS

BLADE-PD • BH16-07290
3CCT IN ONE - With Remote
White
LED 45W 4050 Lümen
230Volt IP20 Iron+PS



BLADE-PD • BH16-07281
3CCT IN ONE
Black
LED 45W 4050 Lümen
230Volt IP20 Iron+PS

BLADE-PD • BH16-07291
3CCT IN ONE - With Remote
Black
LED 45W 4050 Lümen
230Volt IP20 Iron+PS



BLADE-PD • BH16-07287
3CCT IN ONE
Wooden
LED 45W 4050 Lümen
230Volt IP20 Iron+PS


BLADE-PD • BH16-07297
3CCT IN ONE - With Remote
Wooden
LED 45W 4050 Lümen
230Volt IP20 Iron+PS




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



BLADE-PDS • BH16-09080
3CCT IN ONE
White
LED 24W 2300 Lümen
230Volt IP20 Iron+PS



BLADE-PDS • BH16-09081
3CCT IN ONE
Black
LED 24W 2300 Lümen
230Volt IP20 Iron+PS



BLADE-PDS • BH16-09086
3CCT IN ONE
Golden
LED 24W 2300 Lümen
230Volt IP20 Iron+PS




*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com




BLADE-PDS • BH16-09180
 3CCT IN ONE
 White
 LED 36W 3420 Lümen
 230Volt IP20 Iron+PS



BLADE-PDS • BH16-09181
 3CCT IN ONE
 Black
 LED 36W 3420 Lümen
 230Volt IP20 Iron+PS




BLADE-PDS • BH16-09186
 3CCT IN ONE
 Golden
 LED 36W 3420 Lümen
 230Volt IP20 Iron+PS




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




BLADE-PDS • BH16-09280
3CCT IN ONE
White
LED 45W 4200 Lümen
230Volt IP20 Iron+PS



BLADE-PDS • BH16-09281
3CCT IN ONE
Black
LED 45W 4200 Lümen
230Volt IP20 Iron+PS



BLADE-PDS • BH16-09286
3CCT IN ONE
Golden
LED 45W 4200 Lümen
230Volt IP20 Iron+PS



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



BLADE-PDS2 • BH16-09680

LED
3CCT IN ONE
White
LED 70W 6550 Lümen
230Volt IP20 Iron+PS
A+



BLADE-PDS2 • BH16-09681

LED
3CCT IN ONE
Black
LED 70W 6550 Lümen
230Volt IP20 Iron+PS
A+



BLADE-PDS2 • BH16-09686


LED
3CCT IN ONE
Golden
LED 70W 6550 Lümen
230Volt IP20 Iron+PS
A+




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




BLADE-PD2 • BH16-09980
3CCT IN ONE
White
LED 26W 2500 Lümen
230Volt IP20 Iron+PS



BLADE-PD2 • BH16-09981
3CCT IN ONE
Black
LED 26W 2500 Lümen
230Volt IP20 Iron+PS




BLADE-PD2 • BH16-09986
3CCT IN ONE
Golden
LED 26W 2500 Lümen
230Volt IP20 Iron+PS




*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



BLADE-LN • BH16-08280
 3CCT IN ONE
 White
 LED 45W 4050 Lümen
 230Volt IP20 Iron+PS
 A+



BLADE-LN • BH16-08281
 3CCT IN ONE
 Black
 LED 45W 4050 Lümen
 230Volt IP20 Iron+PS
 A+




PENDANT KIT • BLADE-LN
 White • SH16-05007

PENDANT KIT • BLADE-LN
 Black • SH16-05008

PENDANT KIT • BLADE-LN
 Wooden • SH16-05009



BLADE-LN • BH16-08287
 3CCT IN ONE
 Wooden
 LED 45W 4050 Lümen
 230Volt IP20 Iron+PS
 A+



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



- LED SENSOR CEILING FIXTURE
- LED SENSOR WALL FIXTURE
- LED CEILING FIXTURE
- LED BULKHEAD
- LED SENSOR BULKHEAD
- LED WATERPROOF FIXTURE

**Features**

- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Built in driver
- Built in sensor
- Suitable for indoor ceiling use

Applications




- Stairs
- Restrooms
- Halls



Power consumption :0.45W(static 0.1W)
 Time delay :Min.8sec-Max.2min.(adjustable)
 Detection angle :360°
 Detection distance :Max.6m (<24°C)
 Detection speed :0.6-1.5m/s
 Ambient light :<3-2000lux
 Installation height :2m-4m



MODEL NO	TYPE	SENSOR TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BC15-00300	ML300	PIR	White	3000K	15W	900Lm	220V-240VAC	>80	>0.55	120°	Iron	10
BC15-00330	ML300	PIR	White	6500K	15W	900Lm	220V-240VAC	>80	>0.55	120°	Iron	10

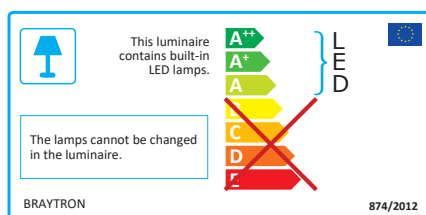

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Homogenous illuminance
- Aesthetic Design
- Ingress Protection against water
- Suitable for indoor & outdoor ceiling use

Applications

- General indoor lighting
- Bathrooms & kitchens
- Restrooms & halls
- General living areas



A+


LED

20,000 HOURS

3 YEARS WARRANTY

IP44

SENSOR



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BH15-01100	Jade-Sensor	White	3000K	18W	1440Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BH15-01130	Jade-Sensor	White	6500K	18W	1440Lm	220V-240VAC	>80	>0.55	110°	Plastic	10

This luminaire contains built-in LED lamps.

LED

The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



CE

EMC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP44


Non-halogenate

100000 HOURS

25.000

-20°C

+40°C



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Features




- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Homogenous illuminance
- Aesthetic Design
- Ingress Protection against water
- Suitable for indoor & outdoor ceiling use

Applications

- General indoor lighting
- Bathrooms & kitchens
- Restrooms & halls
- General living areas



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BH15-02100	Jade	White	3000K	20W	1440Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BH15-02130	Jade	White	6500K	20W	1440Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BH15-02200	Jade	White	3000K	30W	2060Lm	220V-240VAC	>80	>0.95	110°	Plastic	10
BH15-02230	Jade	White	6500K	30W	2060Lm	220V-240VAC	>80	>0.95	110°	Plastic	10

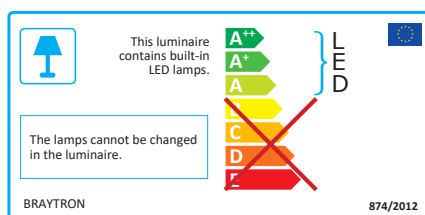

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features



- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Homogenous illuminance
- Aesthetic Design
- Ingress Protection against water
- Suitable for indoor & outdoor ceiling use

Applications


- General indoor lighting
- Bathrooms & kitchens
- Restrooms & halls
- General living areas




MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BH15-03100	Jade	White	3000K	20W	1440Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BH15-03130	Jade	White	6500K	20W	1440Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BH15-03200	Jade	White	3000K	30W	2060Lm	220V-240VAC	>80	>0.95	110°	Plastic	10
BH15-03230	Jade	White	6500K	30W	2060Lm	220V-240VAC	>80	>0.95	110°	Plastic	10

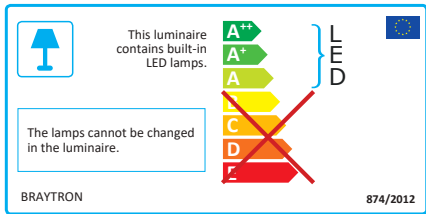

20W



30W



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



- LED WATERPROOF FIXTURE


- WATERPROOF FIXTURE

Features

- Easy & quick installation
- Energy efficient and long lasting
- Homogeneous illuminance
- Smart product for tool-free installation
- Made of high grade Polycarbonat extrusion
- Built-in driver
- IK08 Mechanical external impact
- IP65 waterproof and dustproof
- Suitable for wall and ceiling use

Application

- Car park areas
- Industrial halls
- Warehouses
- Cold storage rooms

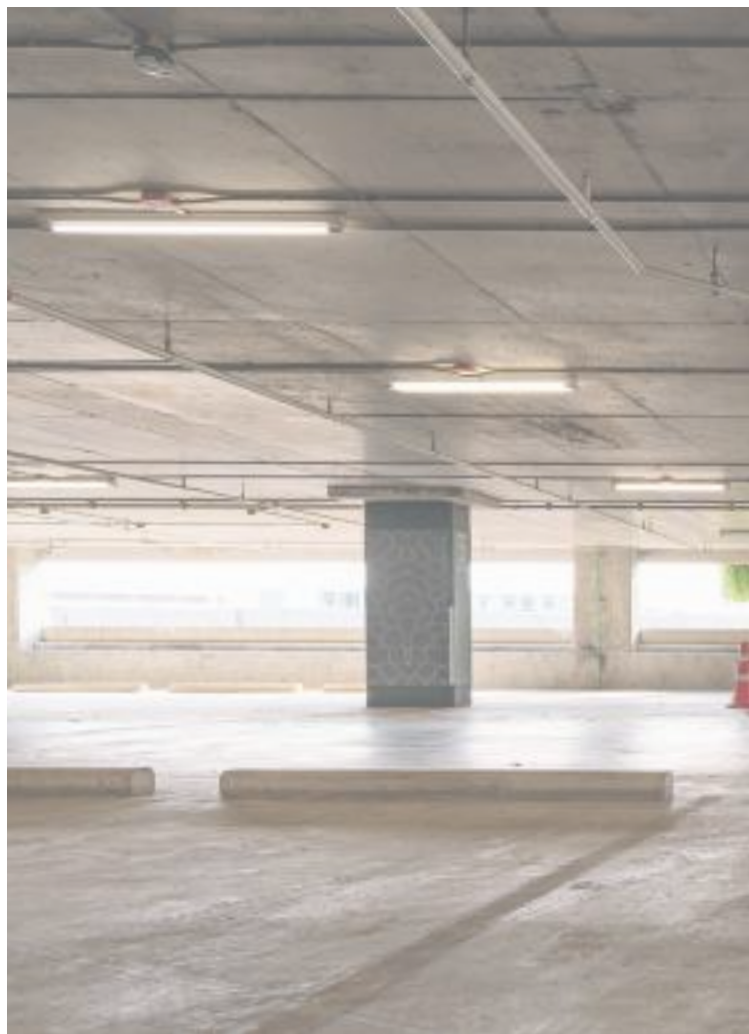

A+

Powered by





SAMSUNG LED

20,000 HOURS

3 YEARS WARRANTY

IP65

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT06-00600	Proline-IPS/0.6mt	White	3000K	18W	1780Lm	220V-240VAC	>80	>0.55	120°	Plastic	10
BT06-00610	Proline-IPS/0.6mt	White	4000K	18W	1780Lm	220V-240VAC	>80	>0.55	120°	Plastic	10
BT06-00630	Proline-IPS/0.6mt	White	6500K	18W	1780Lm	220V-240VAC	>80	>0.55	120°	Plastic	10
BT06-01200	Proline-IPS/1.2mt	White	3000K	36W	3420Lm	220V-240VAC	>80	>0.95	120°	Plastic	10
BT06-01210	Proline-IPS/1.2mt	White	4000K	36W	3420Lm	220V-240VAC	>80	>0.95	120°	Plastic	10
BT06-01230	Proline-IPS/1.2mt	White	6500K	36W	3420Lm	220V-240VAC	>80	>0.95	120°	Plastic	10
BT06-01500	Proline-IPS/1.5mt	White	3000K	45W	4360Lm	220V-240VAC	>80	>0.95	120°	Plastic	10
BT06-01510	Proline-IPS/1.5mt	White	4000K	45W	4360Lm	220V-240VAC	>80	>0.95	120°	Plastic	10
BT06-01530	Proline-IPS/1.5mt	White	6500K	45W	4360Lm	220V-240VAC	>80	>0.95	120°	Plastic	10

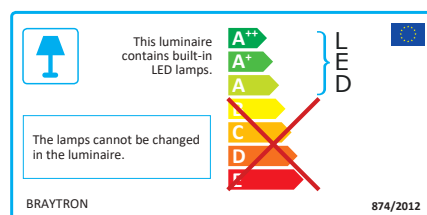

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features




- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Homogenous illuminance
- Aesthetic Design
- Ingress Protection against water
- Suitable for indoor & outdoor ceiling use

Application

- General outdoor lighting
- Industrial halls
- Parking lots, Warehouses
- Cold storage rooms



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT07-00610	Proline-IPG	White	4000K	16W	1700Lm	220V-240VAC	>80	>0.55	120°	Plastic	20
BT07-00630	Proline-IPG	White	6500K	16W	1700Lm	220V-240VAC	>80	>0.55	120°	Plastic	20
BT07-01210	Proline-IPG	White	4000K	32W	3400Lm	220V-240VAC	>80	>0.95	120°	Plastic	20
BT07-01230	Proline-IPG	White	6500K	32W	3400Lm	220V-240VAC	>80	>0.95	120°	Plastic	20

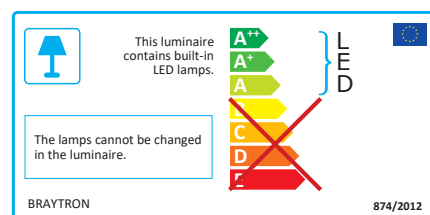

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Homogenous illuminance
- Aesthetic Design
- Ingress Protection against water
- Suitable for indoor & outdoor ceiling use

Application




- General outdoor lighting
- Industrial halls
- Parking lots, Warehouses
- Cold storage rooms



Linkable



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT07-30610	Proline-IPG	White	4000K	22W	2400Lm	220V-240VAC	>80	>0.9	120°	Plastic	20
BT07-30630	Proline-IPG	White	6500K	22W	2400Lm	220V-240VAC	>80	>0.9	120°	Plastic	20
BT07-31210	Proline-IPG	White	4000K	45W	5000Lm	220V-240VAC	>80	>0.9	120°	Plastic	20
BT07-31230	Proline-IPG	White	6500K	45W	5000Lm	220V-240VAC	>80	>0.9	120°	Plastic	20
BT07-31510	Proline-IPG	White	4000K	60W	6600Lm	220V-240VAC	>80	>0.9	120°	Plastic	20
BT07-31530	Proline-IPG	White	6500K	60W	6600Lm	220V-240VAC	>80	>0.9	120°	Plastic	20

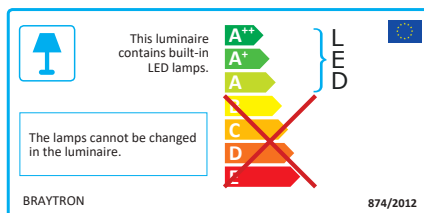

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features





- Easy & quick installation
- Energy efficient and long lasting
- Homogeneous illuminance
- Smart product for tool-free installation
- Made of high grade Polycarbonat extrusion
- Built-in driver
- IK08 Mechanical external impact
- IP65 waterproof and dustproof
- Suitable for wall and ceiling use

Application

- Car park areas
- Industrial halls
- Warehouses
- Cold storage rooms



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT02-00600	Proline-IP/0.6mt	White	3000K	18W	1500Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BT02-00610	Proline-IP/0.6mt	White	4000K	18W	1500Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BT02-00630	Proline-IP/0.6mt	White	6500K	18W	1500Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BT02-01200	Proline-IP/1.2mt	White	3000K	36W	2900Lm	220V-240VAC	>80	>0.95	110°	Plastic	10
BT02-01210	Proline-IP/1.2mt	White	4000K	36W	2900Lm	220V-240VAC	>80	>0.95	110°	Plastic	10
BT02-01230	Proline-IP/1.2mt	White	6500K	36W	2900Lm	220V-240VAC	>80	>0.95	110°	Plastic	10
BT02-01500	Proline-IP/1.5mt	White	3000K	45W	3700Lm	220V-240VAC	>80	>0.95	110°	Plastic	10
BT02-01510	Proline-IP/1.5mt	White	4000K	45W	3700Lm	220V-240VAC	>80	>0.95	110°	Plastic	10
BT02-01530	Proline-IP/1.5mt	White	6500K	45W	3700Lm	220V-240VAC	>80	>0.95	110°	Plastic	10

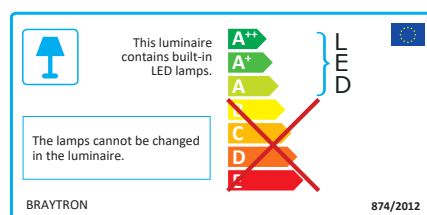

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Homogeneous illuminance
- Smart product for tool-free installation
- Made of high grade Polycarbonat extrusion
- Built-in driver
- IK08 Mechanical external impact
- IP65 waterproof and dustproof
- Suitable for wall and ceiling use

Application

- Car park areas
- Industrial halls
- Warehouses
- Cold storage rooms



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT03-00600	Proline-IPS/0.6mt	White	3000K	18W	1500Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BT03-00630	Proline-IPS/0.6mt	White	6500K	18W	1500Lm	220V-240VAC	>80	>0.55	110°	Plastic	10
BT03-01200	Proline-IPS/1.2mt	White	3000K	36W	3200Lm	220V-240VAC	>80	>0.95	110°	Plastic	10
BT03-01230	Proline-IPS/1.2mt	White	6500K	36W	3200Lm	220V-240VAC	>80	>0.95	110°	Plastic	10



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.




BRAYTRON



LED



874/2012



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Suitable for T8 LED tube connection
- Smart product for tool-free installation
- Made of high grade Polycarbonat body
- IK08 Mechanical external impact
- IP65 waterproof and dustproof
- Suitable for wall and ceiling use

Applications

- Car park areas
- Industrial halls
- Warehouses
- Cold storage rooms



MODEL NO	TYPE	LED TUBE TYPE	SOCKET	BODY COLOR	CONNECTION TYPE	VOLTAGE	SUITABLE FOR	MATERIAL	PCS/CTN
BT05-10680	1x0.6mt	0.6mt-T8	G13	Milky White	Single Side Tube	220V-240VAC	BA52-106XX / BA52-206XX	Plastic	16
BT05-20680	2x0.6mt	0.6mt-T8	G13	Milky White	Single Side Tube	220V-240VAC	BA52-106XX / BA52-206XX	Plastic	12
BT05-11280	1x1.2mt	1.2mt-T8	G13	Milky White	Single Side Tube	220V-240VAC	BA52-112XX / BA52-212XX	Plastic	16
BT05-21280	2x1.2mt	1.2mt-T8	G13	Milky White	Single Side Tube	220V-240VAC	BA52-112XX / BA52-212XX	Plastic	12
BT05-11580	1x1.5mt	1.5mt-T8	G13	Milky White	Single Side Tube	220V-240VAC	BA52-115XX / BA52-215XX	Plastic	16
BT05-21580	2x1.5mt	1.5mt-T8	G13	Milky White	Single Side Tube	220V-240VAC	BA52-115XX / BA52-215XX	Plastic	12

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:


A++
A+
A
B
C
D
E

LED

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

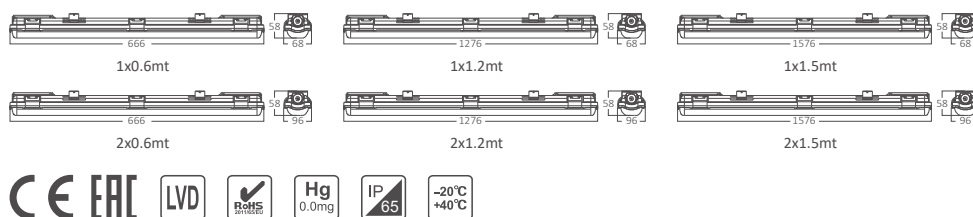

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



- LED BULKHEAD
- LED SENSOR BULKHEAD



Features






- Easy & quick installation
- Energy efficient and long lasting
- Homogeneous illuminance
- Flicker-free
- Smart product for tool-free installation
- Made of high grade Polycarbonat material
- Built-in driver
- IK08 Mechanical external impact
- IP54 waterproof and dustproof
- Suitable for wall and ceiling use

Applications

- General outdoor lighting
- Car park areas
- Industrial halls
- Warehouses
- Cold storage rooms
- Elevator shafts



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BC17-00700	Bulkhead-B-ELP	White	3000K	8W	600lm	220V-240VAC	>80	>0.55	120°	Plastic	32
BC17-00710	Bulkhead-B-ELP	White	4000K	8W	600lm	220V-240VAC	>80	>0.55	120°	Plastic	32
BC17-00730	Bulkhead-B-ELP	White	6500K	8W	600lm	220V-240VAC	>80	>0.55	120°	Plastic	32
BC17-00800	Bulkhead-B-ELP	White	3000K	12W	900lm	220V-240VAC	>80	>0.55	120°	Plastic	32
BC17-00810	Bulkhead-B-ELP	White	4000K	12W	900lm	220V-240VAC	>80	>0.55	120°	Plastic	32
BC17-00830	Bulkhead-B-ELP	White	6500K	12W	900lm	220V-240VAC	>80	>0.55	120°	Plastic	32
BC17-00900	Bulkhead-B-ELP	White	3000K	18W	1350lm	220V-240VAC	>80	>0.55	120°	Plastic	24
BC17-00910	Bulkhead-B-ELP	White	4000K	18W	1350lm	220V-240VAC	>80	>0.55	120°	Plastic	24
BC17-00930	Bulkhead-B-ELP	White	6500K	18W	1350lm	220V-240VAC	>80	>0.55	120°	Plastic	24

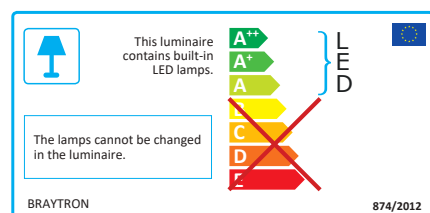


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Homogeneous illuminance
- Flicker-free
- Smart product for tool-free installation
- Made of high grade Polycarbonat material
- Built-in driver
- IK08 Mechanical external impact
- IP54 waterproof and dustproof
- Suitable for wall and ceiling use

Applications

- General outdoor lighting
- Car park areas
- Industrial halls
- Warehouses
- Cold storage rooms
- Elevator shafts

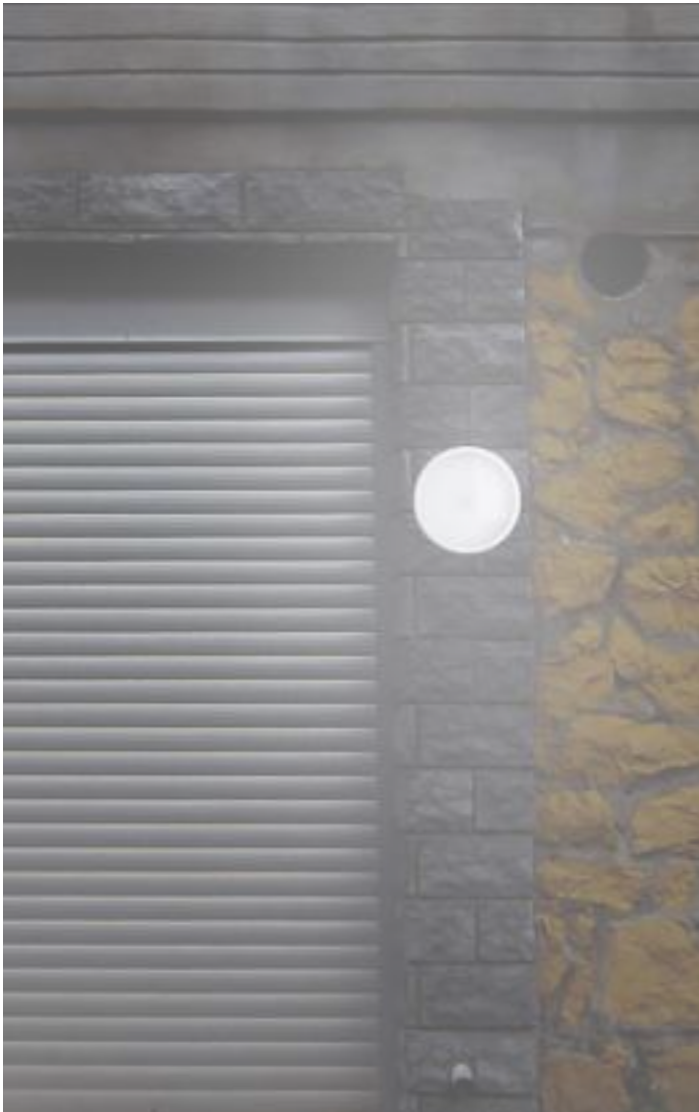

LED

20,000 HOURS

2 YEARS WARRANTY

IP54

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BC17-01100	Bulkhead-B-RND	White	3000K	12W	900Lm	220V-240VAC	>80	>0.55	120°	Plastic	20
BC17-01110	Bulkhead-B-RND	White	4000K	12W	900Lm	220V-240VAC	>80	>0.55	120°	Plastic	20
BC17-01130	Bulkhead-B-RND	White	6500K	12W	900Lm	220V-240VAC	>80	>0.55	120°	Plastic	20
BC17-01200	Bulkhead-B-RND	White	3000K	18W	1350Lm	220V-240VAC	>80	>0.55	120°	Plastic	20
BC17-01210	Bulkhead-B-RND	White	4000K	18W	1350Lm	220V-240VAC	>80	>0.55	120°	Plastic	20
BC17-01230	Bulkhead-B-RND	White	6500K	18W	1350Lm	220V-240VAC	>80	>0.55	120°	Plastic	20


This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED

BRAYTRON

874/2012



CE

EAC

LVD

EMC

ErP COMPLIANT

RoHS


Hg 0.0mg

IP54

Non-halogenate

1000000 >25,000

-20°C +40°C



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com




Features




- Easy & quick installation
- Energy efficient and long lasting
- Homogeneous illuminance
- Flicker-free
- Smart product for tool-free installation
- Made of high grade Polycarbonat material
- Built-in driver
- IP54 waterproof and dustproof
- Suitable for wall and ceiling use
- Built in Motion Sensor
- Time Delay : Min. 120sec.
- Detection Range :Max. 3m (<24 C°)
- Detection Angle : 180°

Applications


- General outdoor lighting
- Car park areas
- Industrial halls
- Warehouses
- Cold storage rooms
- Elevator shafts



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BC17-21100	Bulkhead-B-RND	White	3000K	15W	1050Lm	220V-240VAC	>80	>0.55	120°	Plastic	20
BC17-21110	Bulkhead-B-RND	White	4000K	15W	1050Lm	220V-240VAC	>80	>0.55	120°	Plastic	20
BC17-21130	Bulkhead-B-RND	White	6500K	15W	1050Lm	220V-240VAC	>80	>0.55	120°	Plastic	20

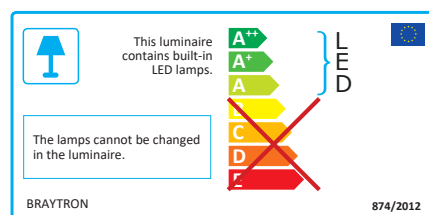

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

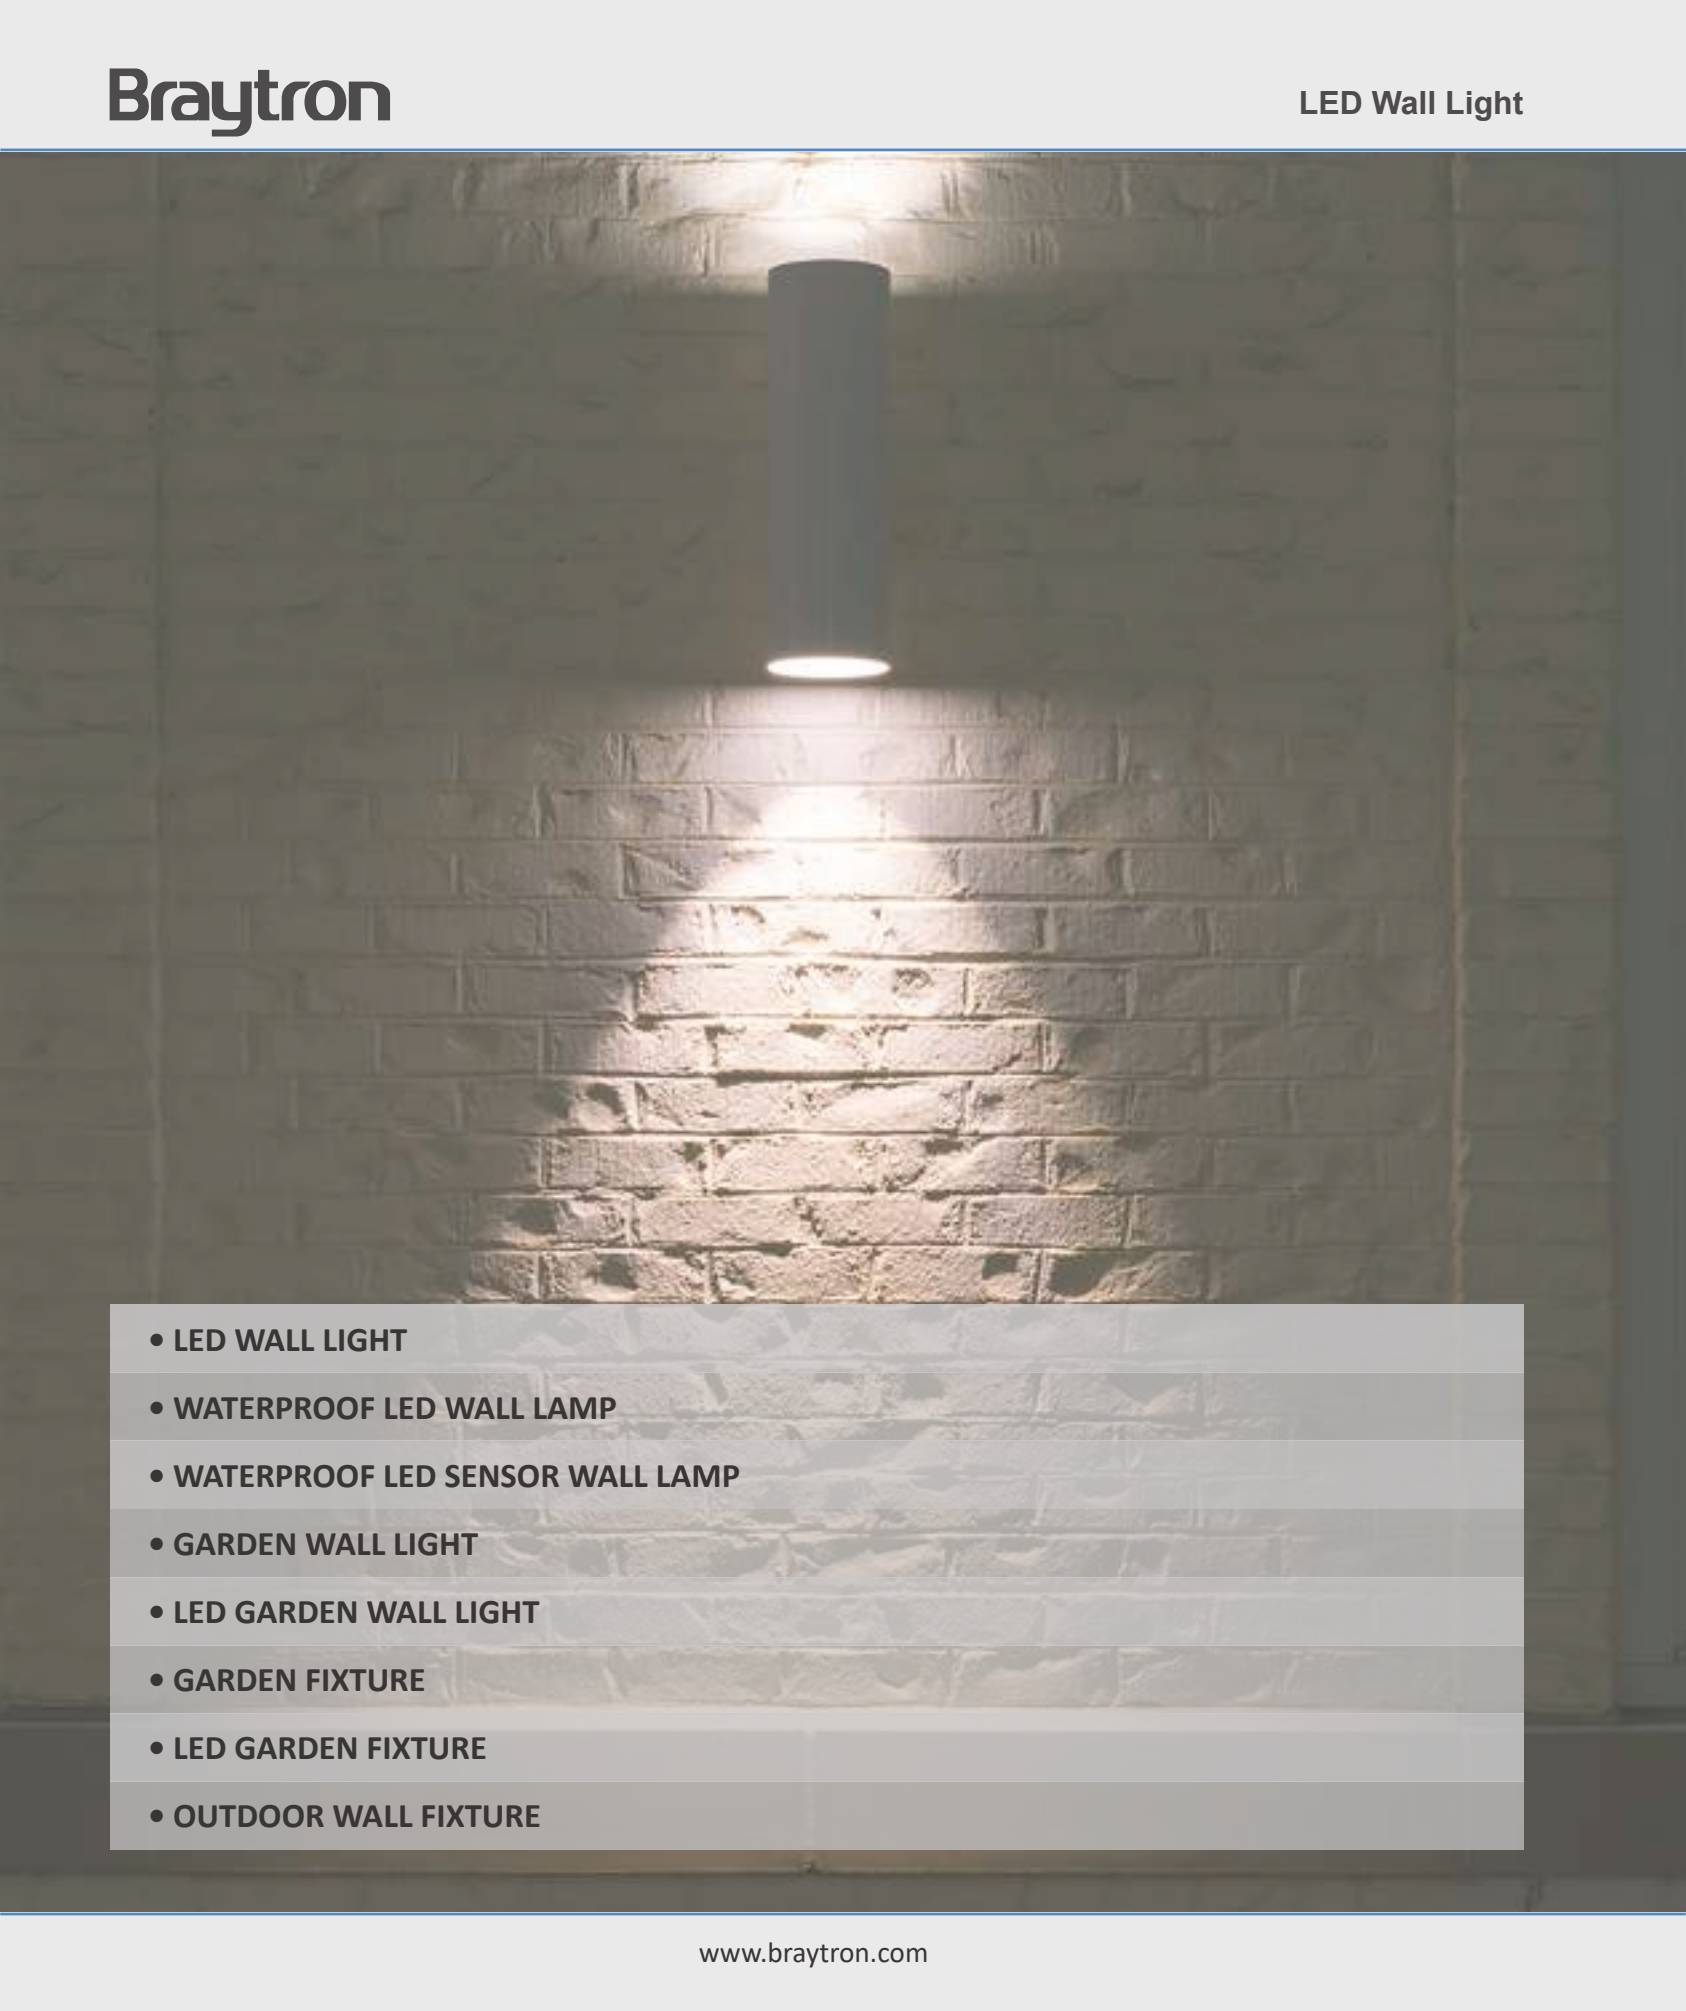- 
- LED WALL LIGHT
 - WATERPROOF LED WALL LAMP
 - WATERPROOF LED SENSOR WALL LAMP
 - GARDEN WALL LIGHT
 - LED GARDEN WALL LIGHT
 - GARDEN FIXTURE
 - LED GARDEN FIXTURE
 - OUTDOOR WALL FIXTURE

**Features**




- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Anti-glare design
- Built in driver
- Excellent finish
- Suitable for indoor wall use

Applications

- General indoor walls
- Showrooms, Shops, offices
- Cafes, restaurants, hotels
- General living areas



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BH07-03000	Avva-WL01	White	3000K	8W	480Lm	220V-240VAC	>80	>0.55	90°	Aluminium	20
BH07-03001	Avva-WL01	Black	3000K	8W	480Lm	220V-240VAC	>80	>0.55	90°	Aluminium	20

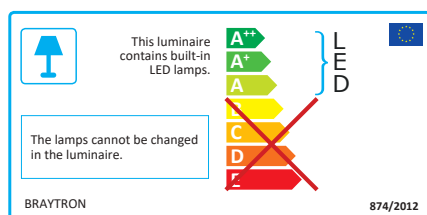


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features




- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Anti-glare design
- Built in driver
- Excellent finish
- Suitable for indoor wall use

Applications

- General indoor walls
- Showrooms, Shops, offices
- Cafes, restaurants, hotels
- General living areas

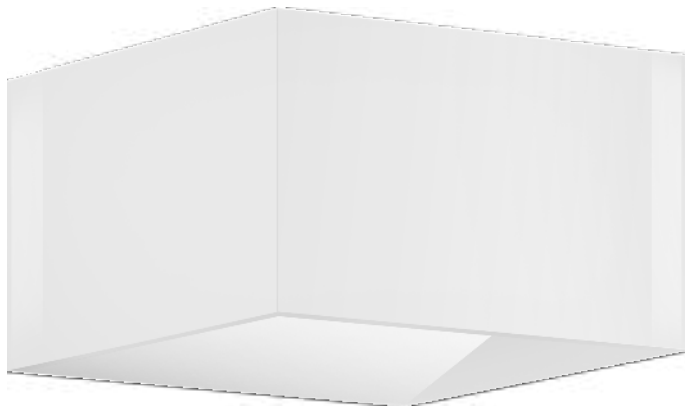

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BH07-03100	Avva-WL02	White	3000K	8W	480Lm	220V-240VAC	>80	>0.55	90°	Aluminium	20
BH07-03101	Avva-WL02	Black	3000K	8W	480Lm	220V-240VAC	>80	>0.55	90°	Aluminium	20

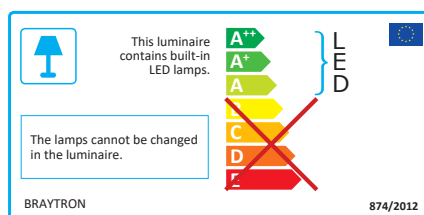

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

**Features**




- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Anti-glare design
- Built in driver
- Excellent finish
- Suitable for indoor wall use

Applications

- General indoor walls
- Showrooms, Shops, offices
- Cafes, restaurants, hotels
- General living areas



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BH07-03200	Avva-WL03	White	3000K	8W	480Lm	220V-240VAC	>80	>0.55	90°	Aluminium	20
BH07-03201	Avva-WL03	Black	3000K	8W	480Lm	220V-240VAC	>80	>0.55	90°	Aluminium	20

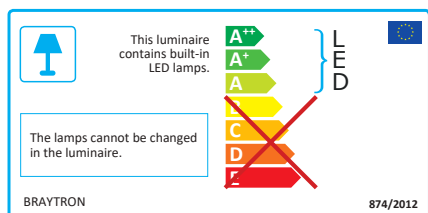

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Anti-glare design
- Built in driver
- Excellent finish
- Suitable for indoor wall use

Applications

- General indoor walls
- Showrooms, Shops, offices
- Cafes, restaurants, hotels
- General living areas



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BH07-03300	Avva-WL04	White	3000K	12W	720Lm	220V-240VAC	>80	>0.55	90°	Aluminium	20
BH07-03301	Avva-WL04	Black	3000K	12W	720Lm	220V-240VAC	>80	>0.55	90°	Aluminium	20

This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

A++
A+
A
C
D
E

LED



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Anti-glare design
- Built-in driver
- Adjustable light angle
- Suitable for outdoor & indoor wall use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor & indoor walls
- Public park & gardens





MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG38-00010	Vekta-A-WL.2	White	3000K	2x3W	260Lm	220V-240VAC	>80	>0.55	75°	Plastic	50
BG38-00011	Vekta-A-WL.2	Black	3000K	2x3W	260Lm	220V-240VAC	>80	>0.55	75°	Plastic	50

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

BRAYTRON 874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Anti-glare design
- Built-in driver
- Adjustable light angle
- Suitable for outdoor & indoor wall use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor & indoor walls
- Public park & gardens



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG38-00102	Walls-A	D.Grey	3000K	15W	1200Lm	220V-240VAC	>80	>0.55	120°	Plastic	20
BG38-00132	Walls-A	D.Grey	6500K	15W	1200Lm	220V-240VAC	>80	>0.55	120°	Plastic	20



This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

Braytron

874/2012

LED

A++
A+
A
B
C
D
E



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Anti-glare design
- Built-in driver
- Adjustable light angle
- Suitable for outdoor & indoor wall use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor & indoor walls
- Public park & gardens



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG38-00302	Walls-B	D.Grey	3000K	15W	1200Lm	220V-240VAC	>80	>0.55	120°	Plastic	20
BG38-00332	Walls-B	D.Grey	6500K	15W	1200Lm	220V-240VAC	>80	>0.55	120°	Plastic	20

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Braytron

874/2012

A+

A+

A



B

C

D

E

LED



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Anti-glare design
- Built-in driver
- Adjustable light angle
- Suitable for outdoor & indoor wall use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor & indoor walls
- Public park & gardens



A⁺

LED

25,000 HOURS

2 YEARS WARRANTY

IP65

SENSOR

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG38-00402	Walls-BS	D.Grey	3000K	20W	1600lm	220V-240VAC	>80	>0.55	120°	Plastic	16

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Braytron

874/2012

A⁺⁺

A⁺

A


B

C

D

E

LED



CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS COMPLIANT


Hg 0.0mg

IP 65

Max. Clearance

> 25,000

-20°C +40°C



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Anti-glare design
- Built-in driver
- Adjustable light angle
- Suitable for outdoor & indoor wall use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor & indoor walls
- Public park & gardens



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG38-00702	Walls-D	D.Grey	3000K	12W	840Lm	220V-240VAC	>80	>0.55	110°	Plastic	24
BG38-00732	Walls-D	D.Grey	6500K	12W	840Lm	220V-240VAC	>80	>0.55	110°	Plastic	24

This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

Braytron

874/2012

LED

A++
A+
A
B
C
D
E



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Energy efficient and long lasting
- Saves up to %80 energy
- Anti-glare design
- Built-in driver
- Adjustable light angle
- Suitable for outdoor & indoor wall use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor & indoor walls
- Public park & gardens



A+

LED

20,000 HOURS

2 YEARS WARRANTY

IP65

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG38-00902	Walls-F	D.Grey	3000K	15W	1050Lm	220V-240VAC	>80	>0.55	110°	Plastic	24
BG38-00932	Walls-F	D.Grey	6500K	15W	1050Lm	220V-240VAC	>80	>0.55	110°	Plastic	24

This luminaire contains built-in LED lamps.


The lamps cannot be changed in the luminaire.

Braytron

874/2012

LED

A++
A+
A
B
C
D
E
F



CE ENEC

LVD

EMC

ErP

RoHS


Hg 0.0mg

IP 65

Non-Flammable

> 25,000

-20°C
+40°C



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Built in GU10 Socket
- Anti-glare design
- Suitable for GU10 bulb
- Made of aluminium die-cast body
- Ingress Protection against water
- Suitable for outdoor & indoor wall use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor & indoor walls
- Public park & gardens



MODEL NO	TYPE	BODY COLOR	SOCKET	WATT	VOLTAGE	MATERIAL	PCS/CTN
BG32-00200	Rita-P-WL.1	White	1xGU10	Max.35W	220V-240VAC	Aluminium	24
BG32-00202	Rita-P-WL.1	D.Grey	1xGU10	Max.35W	220V-240VAC	Aluminium	24



This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

The LED lamps cannot be changed in the luminaire.


BRAYTRON

A++
A+
A
B
C
D
E

LED



874/2012



*Technical information indicated above may have tolerance ±10%.For final updated information please visit website www.braytron.com

Features

- Easy & quick installation
- Built in GU10 Socket
- Anti-glare design
- Suitable for GU10 bulb
- Made of aluminium die-cast body
- Ingress Protection against water
- Suitable for outdoor & indoor wall use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor & indoor walls
- Public park & gardens



MODEL NO	TYPE	BODY COLOR	SOCKET	WATT	VOLTAGE	MATERIAL	PCS/CTN
BG32-00220	Rita-P-WL.2	White	2xGU10	Max. 2x35W	220V-240VAC	Aluminium	16
BG32-00222	Rita-P-WL.2	D.Grey	2xGU10	Max. 2x35W	220V-240VAC	Aluminium	16

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:



The LED lamps cannot be changed in the luminaire.

BRAYTRON

A++
A+
A
B
C
D
E

LED

874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features




- Energy efficient and long lasting
- Anti-glare design
- Flicker-free
- Made of aluminium die-cast body
- Polyester powder coating for outdoor use
- Built-in driver
- IP44 Protection
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home garden backyards
- Public parks & gardens



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG40-00100	Rita-P WL.1	White	3000K	5W	450lm	220V-240VAC	>70	>0.55	60°	Aluminium	24
BG40-00102	Rita-P WL.1	D.Grey	3000K	5W	450lm	220V-240VAC	>70	>0.55	60°	Aluminium	24

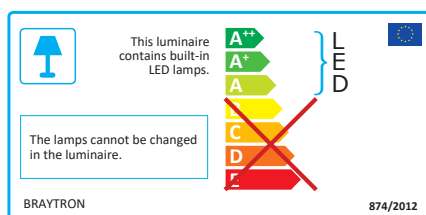

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features




- Energy efficient and long lasting
- Anti-glare design
- Flicker-free
- Made of aluminium die-cast body
- Polyester powder coating for outdoor use
- Built-in driver
- IP44 Protection
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home garden backyards
- Public parks & gardens



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG40-00200	Rita-P WL.2	White	3000K	2x5W	900Lm	220V-240VAC	>70	>0.55	60°	Aluminium	16
BG40-00202	Rita-P WL.2	D.Grey	3000K	2x5W	900Lm	220V-240VAC	>70	>0.55	60°	Aluminium	16

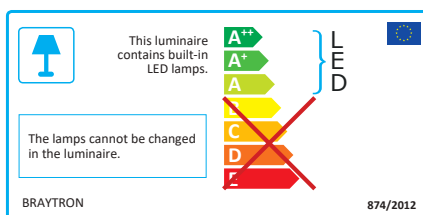

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

**Product Benefits**

- Easy & quick installation
- Built in GU10 Socket
- Anti-glare design
- Suitable for M16 bulb
- Made of aluminium die-cast body
- Ingress Protection against water
- Suitable for outdoor & indoor wall use

Applications

- General outdoor lighting
- Home and garden backyards
- outdoor & indoor walls
- Public park & gardens





MODEL NO	TYPE	BODY COLOR	SOCKET	WATT	VOLTAGE	MATERIAL	PCS/CTN
BG32-00304	Rita-S-WL.1	Nickel	1xGU10	Max.35W	220V-240VAC	Aluminium	20
BG32-00324	Rita-S-WL.2	Nickel	2xGU10	Max.2x35W	220V-240VAC	Aluminium	20

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

The LED lamps cannot be changed in the luminaire.

BRAYTRON 874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Energy efficient and long lasting
- Saves up to %80 energy
- Easy & quick installation
- Anti-glare design
- Made of aluminium die-cast body
- Ingress Protection against water
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home and garden backyards
- Public park & gardens



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT25-00102	Spotlux	Black	3000K	9W	720Lm	220V-240VAC	>70	>0.55	60°	Aluminium	20
BT25-00132	Spotlux	Black	6500K	9W	720Lm	220V-240VAC	>70	>0.55	60°	Aluminium	20
BT25-00152	Spotlux	Black	Green	9W	720Lm	220V-240VAC	>70	>0.55	60°	Aluminium	20
BT25-00172	Spotlux	Black	Amber	9W	320Lm	220V-240VAC	>70	>0.55	60°	Aluminium	20



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.



BRAYTRON

874/2012



LED





*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

**Product Benefits**



- Easy & quick installation
- Built in GU10 Socket
- Anti-glare design
- Suitable for M16 bulb
- Made of PC body
- Ingress Protection against water
- Suitable for outdoor use

Application

- General outdoor lighting
- Home and garden backyards
- Public park & gardens



MODEL NO	TYPE	BODY COLOR	SOCKET	WATT	VOLTAGE	MATERIAL	PCS/CTN
BT25-00351	Spotlux-GU10	Black	1xGU10	Max.35W	220V-240VAC	Plastic	50

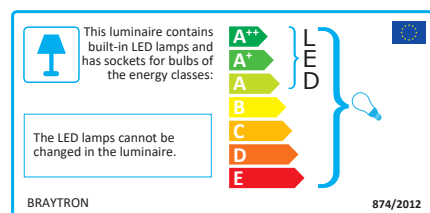

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Energy efficient and long lasting
- Anti-glare design
- Flicker-free
- Made of aluminium die-cast body
- Polyester powder coating for outdoor use
- IP54 Protection
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home garden backyards
- Public parks & gardens



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG40-00502	Pirus-S	Grey	3000K	7W	600Lm	220V-240VAC	>80	>0.8	120°	Aluminium	12



This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

A++
A+
A
C
D
E

LED



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Energy efficient and long lasting
- Anti-glare design
- Flicker-free
- Made of aluminium die-cast body
- Polyester powder coating for outdoor use
- IP54 Protection
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home garden backyards
- Public parks & gardens



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG40-00602	Pirus-S	Grey	3000K	10W	850lm	220V-240VAC	>80	>0.55	120°	Aluminium	8

This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

A++
A+
A
C
D
E

LED



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Energy efficient and long lasting
- Anti-glare design
- Flicker-free
- Made of aluminium die-cast body
- Polyester powder coating for outdoor use
- IP54 Protection
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home garden backyards
- Public parks & gardens



LED

20,000 HOURS

3 YEARS WARRANTY

OSRAM

IP54


MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG40-00702	Sirius-WL.1	Grey	3000K	5W	450Lm	220V-240VAC	>80	>0.8	120°	Aluminium	16
BG40-00802	Sirius-WL.2	Grey	3000K	2x5W	900Lm	220V-240VAC	>80	>0.8	120°	Aluminium	16

This luminaire contains built-in LED lamps.
The lamps cannot be changed in the luminaire.

LED

BRAYTRON

874/2012



CE

EAC

LVD

EMC

ErP COMPLIANT

RoHS


Hg 0.0mg

IP54

Fire Retardant

Shocks >25,000

-20°C +40°C



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Features


- Energy efficient and long lasting
- Anti-glare design
- Flicker-free
- Made of aluminium die-cast body
- Polyester powder coating for outdoor use
- IP54 Protection
- Suitable for outdoor use

Applications




- General outdoor lighting
- Home garden backyards
- Public parks & gardens



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG40-00902	Pirus-WL	Grey	3000K	12W	850Lm	220V-240VAC	>80	>0.8	120°	Aluminium	8
BG40-01002	Pirus-WLS	Grey	3000K	12W	850Lm	220V-240VAC	>80	>0.8	120°	Aluminium	8

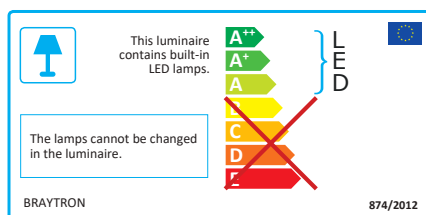

Power consumption : 0.45W (static 0.1W)
 Time delay : Min.5sec.-Max.5min.(adjustable)
 Detection angle : 120°
 Detection distance : λ 1x.8m (<240°)
 Detection speed : 0.6-1.5m/s
 Ambient light : <3-2000lux
 Installation height : 1.8m-3.5m



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features

- Energy efficient and long lasting
- Anti-glare design
- Flicker-free
- Made of aluminium die-cast body
- Polyester powder coating for outdoor use
- IP54 Protection
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home garden backyards
- Public parks & gardens



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG43-00902	Tarus-WLA	Grey	3000K	7W	600Lm	220V-240VAC	>80	>0.8	120°	Aluminium	16
BG43-01002	Tarus-WLS-Sensor	Grey	3000K	7W	600Lm	220V-240VAC	>80	>0.8	120°	Aluminium	16

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

LED

A++

A+

A

B

C

D

E

F

Power consumption : 0.45W (static 0.1W)

Time delay : Min.5sec-Max.5min.(adjustable)



Detection angle : 120° 110°

Detection distance : Max.8m (<240)

Detection speed : 0.6-1.5m/s

Ambient light : <3-2000lux

Installation height : 1.8m-3.5m 1.5-2.5m



*Technical information indicated above may have tolerance ±10%.For final updated information please visit website www.braytron.com

**Features**

- Energy efficient and long lasting
- Anti-glare design
- Flicker-free
- Made of aluminium die-cast body
- Polyester powder coating for outdoor use
- IP54 Protection
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home garden backyards
- Public parks & gardens





MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG43-01102	Tarus-300	Grey	3000K	7W	600Lm	220V-240VAC	>80	>0.8	120°	Aluminium	9
BG43-01202	Tarus-500	Grey	3000K	7W	600Lm	220V-240VAC	>80	>0.8	120°	Aluminium	9
BG43-01402	Tarus-800	Grey	3000K	7W	600Lm	220V-240VAC	>80	>0.8	120°	Aluminium	9

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

BRAYTRON 874/2012

LED energy efficiency class: A++ (green), A+ (light green), A (yellow-green), D (yellow), E (orange), F (red). The D, E, and F classes are crossed out with a red X.



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features




- Energy efficient and long lasting
- Anti-glare design
- Flicker-free
- Made of aluminium die-cast body
- Polyester powder coating for outdoor use
- IP54 Protection
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home garden backyards
- Public parks & gardens



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BG43-02002	Dallas-300	Grey	3000K	7W	600Lm	220V-240VAC	>80	>0.55	120°	Aluminium	8
BG43-02102	Dallas-500	Grey	3000K	7W	600Lm	220V-240VAC	>80	>0.55	120°	Aluminium	4
BG43-02302	Dallas-800	Grey	3000K	7W	600Lm	220V-240VAC	>80	>0.55	120°	Aluminium	4

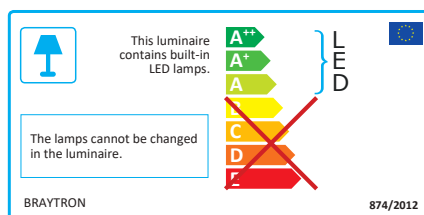

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

**Product Benefits**

- Easy & quick installation
- Built in E27 Socket
- Excellent finish
- Suitable for E27 LED bulb
- Made of aluminium body
- Ingress Protection against water
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor walls
- Public park & gardens



3 YEARS WARRANTY

IP54

BULB NOT INCLUDED



MODEL NO	TYPE	BODY COLOR	SOCKET	MAX. WATT	VOLTAGE	MATERIAL	PCS/CTN
BG43-03002	Paris-WLA	Grey	1xE27	23W	220V-240VAC	Aluminium	4
BG43-03102	Paris-WLS	Grey	1xE27	23W	220V-240VAC	Aluminium	4


 This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

The LED lamps cannot be changed in the luminaire.

LED

A++
A+
A
B
C
D
E

BRAYTRON 874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Built in E27 Socket
- Excellent finish
- Suitable for E27 LED bulb
- Made of aluminium body
- Ingress Protection against water
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor pathways
- Public park & gardens



3 YEARS WARRANTY

IP54

BULB NOT INCLUDED

MODEL NO	TYPE	BODY COLOR	SOCKET	MAX. WATT	VOLTAGE	MATERIAL	PCS/CTN
BG43-03202	Paris-600	Grey	1xE27	23W	220V-240VAC	Aluminium	4
BG43-03302	Paris-800	Grey	1xE27	23W	220V-240VAC	Aluminium	4



This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

The LED lamps cannot be changed in the luminaire.

A++

A+

A

B

C


D

E

LED



874/2012



600



IP54



800



IP54

CE

EAC

LVD

EMC

ErP

RoHS

Hg 0.0mg

IP 54

See Details

25,000

-26°C +40°C

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Built in E27 Socket
- Excellent finish
- Suitable for E27 LED bulb
- Made of aluminium body
- Ingress Protection against water
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor walls
- Public park & gardens



3 YEARS WARRANTY

IP54

BULB NOT INCLUDED

MODEL NO	TYPE	BODY COLOR	SOCKET	MAX. WATT	VOLTAGE	MATERIAL	PCS/CTN
BG43-04002	Milano-WLA	Grey	1xE27	23W	220V-240VAC	Aluminium	4

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

A++

A+

A


B

C

D

E

LED



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Built in E27 Socket
- Excellent finish
- Suitable for E27 LED bulb
- Made of aluminium body
- Ingress Protection against water
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor pathways
- Public park & gardens



3 YEARS WARRANTY

IP44

BULB NOT INCLUDED



MODEL NO	TYPE	BODY COLOR	SOCKET	MAX. WATT	VOLTAGE	MATERIAL	PCS/CTN
BG43-04102	Milano-300	Grey	1xE27	23W	220V-240VAC	Aluminium	9
BG43-04202	Milano-500	Grey	1xE27	23W	220V-240VAC	Aluminium	9
BG43-04302	Milano-800	Grey	1xE27	23W	220V-240VAC	Aluminium	9



This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

A++

A+

A

B

C


D




E

The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012







*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Built in E27 Socket
- Excellent finish
- Suitable for E27 LED bulb
- Made of Plastic body
- Ingress Protection against water
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor walls
- Public park & gardens



2 YEARS
WARRANTY

IP44

BULB NOT INCLUDED

MODEL NO	TYPE	BODY COLOR	SOCKET	MAX. WATT	VOLTAGE	MATERIAL	PCS/CTN
BG44-00100	Dublin-WL	White	1xE27	23W	220V-240VAC	Plastic	10
BG44-00101	Dublin-WL	Black	1xE27	23W	220V-240VAC	Plastic	10
BG44-20100	Dublin-WLS	White	1xE27	23W	220V-240VAC	Plastic	10
BG44-20101	Dublin-WLS	Black	1xE27	23W	220V-240VAC	Plastic	10

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:


The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

A++
A+
A
B
C
D
E

LED



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Built in E27 Socket
- Excellent finish
- Suitable for E27 LED bulb
- Made of Plastic body
- Ingress Protection against water
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor walls
- Public park & gardens



BULB NOT INCLUDED



MODEL NO	TYPE	BODY COLOR	SOCKET	MAX. WATT	VOLTAGE	MATERIAL	PCS/CTN
BG44-00300	Berlin-WLA	White	1xE27	23W	220V-240VAC	Plastic	8
BG44-00301	Berlin-WLA	Black	1xE27	23W	220V-240VAC	Plastic	8
BG44-20300	Berlin-WLS	White	1xE27	23W	220V-240VAC	Plastic	8
BG44-20301	Berlin-WLS	Black	1xE27	23W	220V-240VAC	Plastic	8



This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

The LED lamps cannot be changed in the luminaire.

BRAYTRON



A++
A+
A
B
C
D
E

LED



874/2012







*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

**Product Benefits**

- Easy & quick installation
- Built in E27 Socket
- Excellent finish
- Suitable for E27 LED bulb
- Made of Plastic body
- Ingress Protection against water
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor walls
- Public park & gardens


**2 YEARS**
WARRANTY**IP44****BULB NOT INCLUDED**

MODEL NO	TYPE	BODY COLOR	SOCKET	MAX. WATT	VOLTAGE	MATERIAL	PCS/CTN
BG44-00400	Berlin-WLD	White	1xE27	23W	220V-240VAC	Plastic	8
BG44-00401	Berlin-WLD	Black	1xE27	23W	220V-240VAC	Plastic	8
BG44-00500	Berlin-WLB	White	1xE27	23W	220V-240VAC	Plastic	6
BG44-00501	Berlin-WLB	Black	1xE27	23W	220V-240VAC	Plastic	6

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

The LED lamps cannot be changed in the luminaire.

BRAYTRON 874/2012

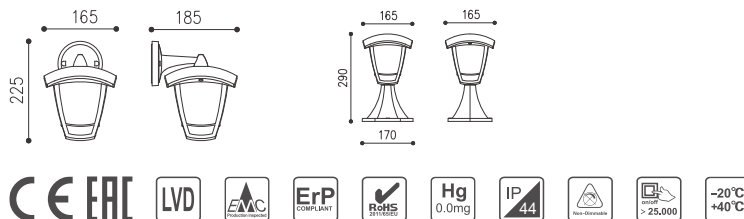

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Built in E27 Socket
- Excellent finish
- Suitable for E27 LED bulb
- Made of Plastic body
- Ingress Protection against water
- Suitable for outdoor use

Applications

- General outdoor lighting
- Home and garden backyards
- Outdoor walls or pathways
- Public park & gardens



2 YEARS
WARRANTY

IP44

BULB NOT INCLUDED

MODEL NO	TYPE	BODY COLOR	SOCKET	MAX. WATT	VOLTAGE	MATERIAL	PCS/CTN
BG44-00600	Berlin-WLH	White	1xE27	23W	220V-240VAC	Plastic	6
BG44-00601	Berlin-WLH	Black	1xE27	23W	220V-240VAC	Plastic	6
BG44-00701	Berlin-WLP	Black	1xE27	23W	220V-240VAC	Plastic	6

This luminaire contains built-in LED lamps and has sockets for bulbs of the energy classes:

A++

A+

A

B

C

D



E

LED


The LED lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

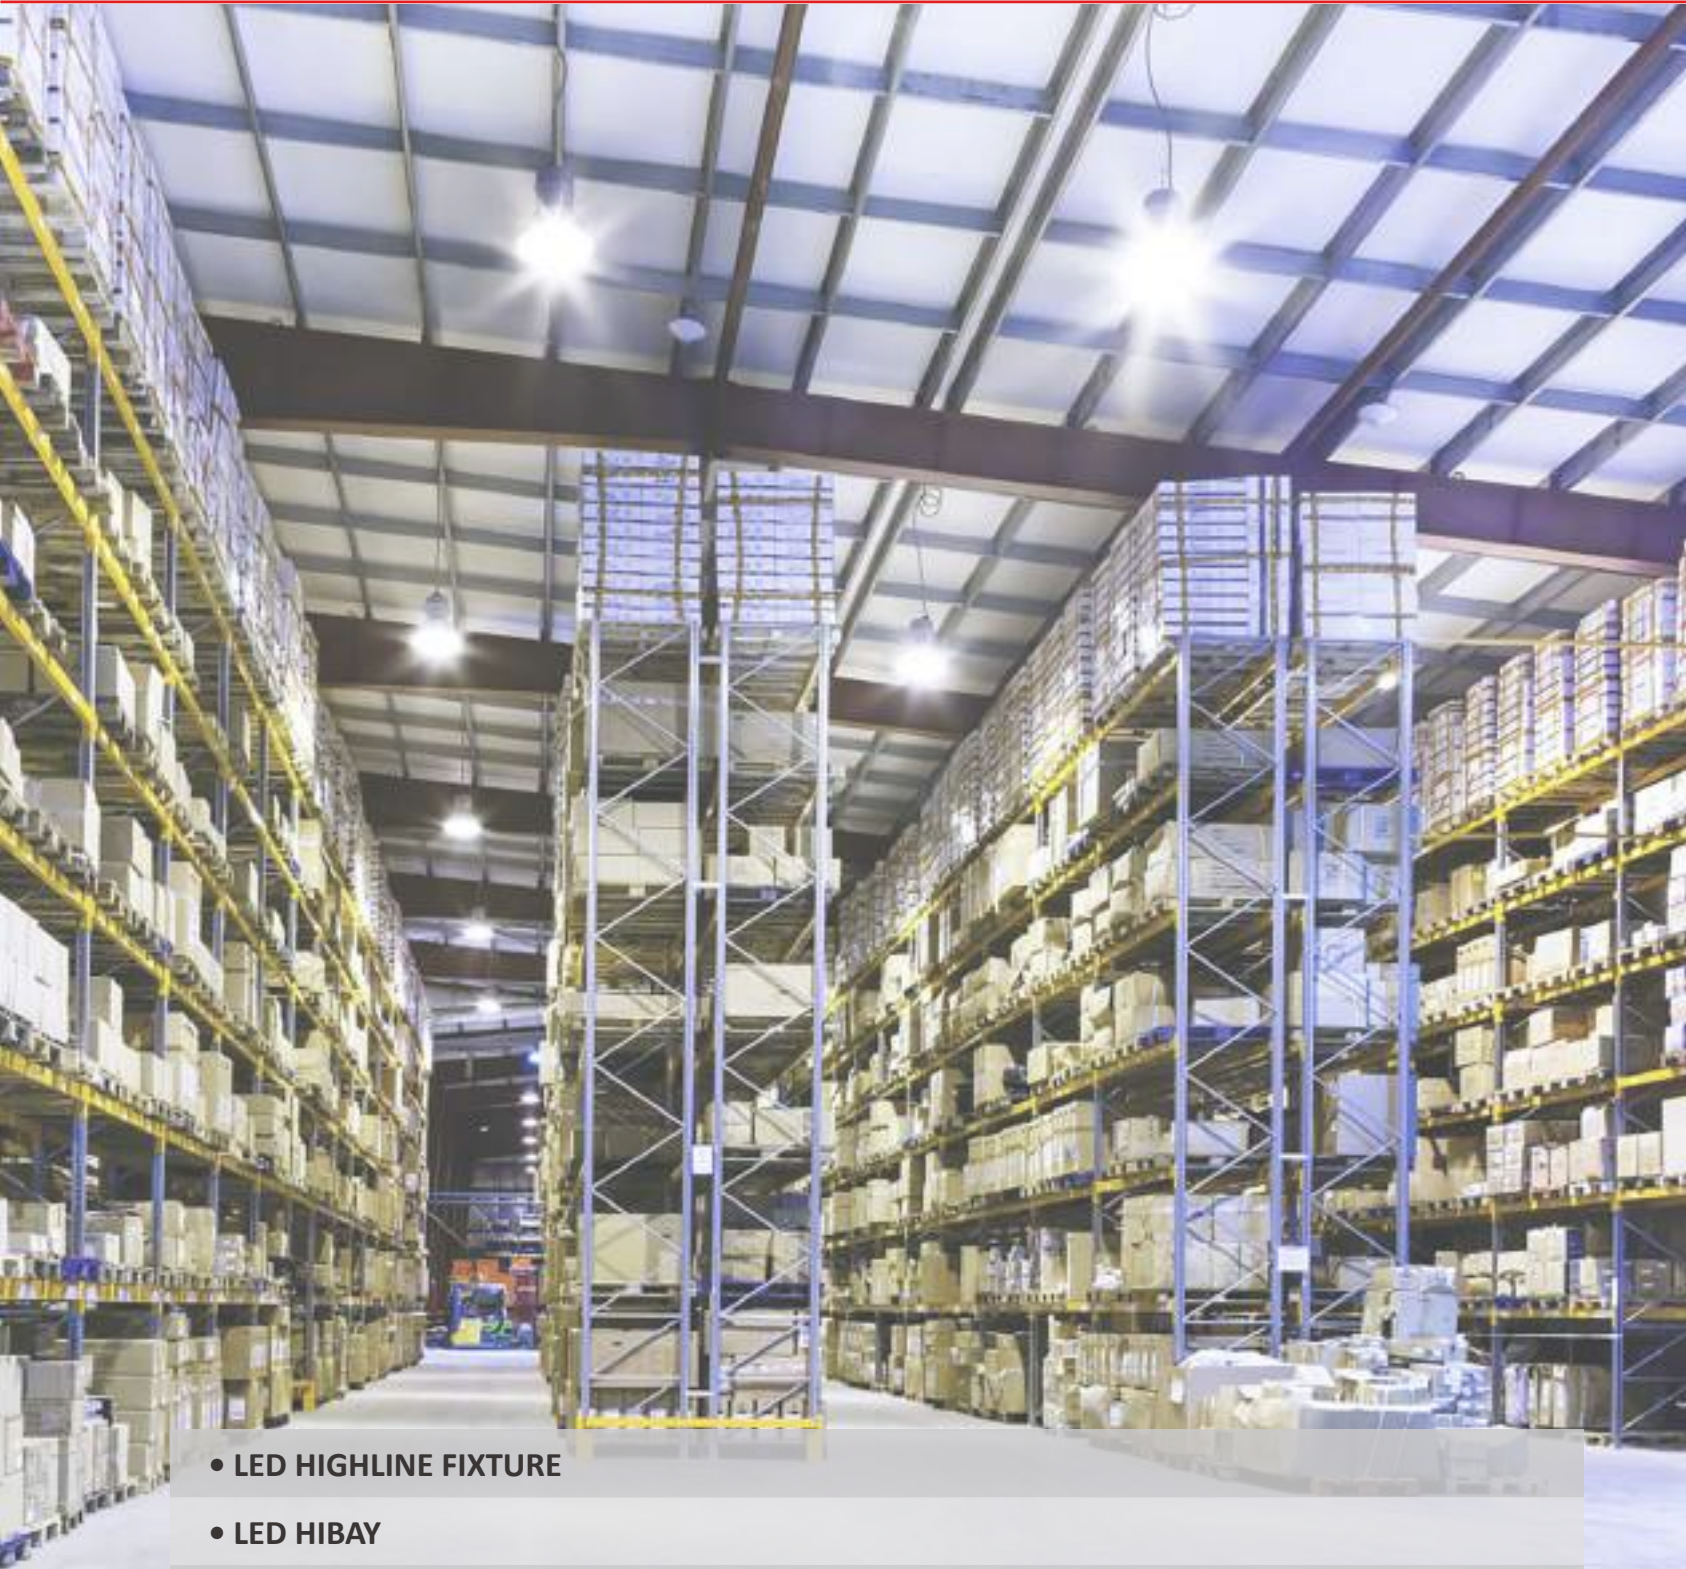

- LED HIGHLINE FIXTURE
- LED HIBAY
- SMD LED FLOODLIGHT
- LED WALL WASHER

Product Benefits

- Made from aluminium
- Energy efficient and long lasting
- Saves up to %80 energy
- Directional illuminance
- With Surface mount bracket
- Ingress Protection against water
- Suitable for indoor & outdoor ceiling use

Applications

- General outdoor lighting
- High-Ceiling Store
- Parking lots, Warehouses
- Factories and logistic centers





Powered by
SAMSUNG LED



TRIDONIC



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT46-06012	Hibay-LN	Grey	4000K	60W	7800Lm	220V-240VAC	>80	>0.95	75°	Aluminium	1
BT46-06032	Hibay-LN	Grey	6500K	60W	7800Lm	220V-240VAC	>80	>0.95	75°	Aluminium	1
BT46-09212	Hibay-LN	Grey	4000K	120W	15600Lm	220V-240VAC	>80	>0.95	75°	Aluminium	1
BT46-09232	Hibay-LN	Grey	6500K	120W	15600Lm	220V-240VAC	>80	>0.95	75°	Aluminium	1



This luminaire contains built-in LED lamps.





LED

The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012





*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Product Benefits

- Made from aluminium
- Energy efficient and long lasting
- Saves up to %80 energy
- Directional illuminance
- With Surface mount bracket
- Ingress Protection against water
- Suitable for indoor & outdoor ceiling use

Applications

- General outdoor lighting
- High-Ceiling Store
- Parking lots, Warehouses
- Factories and logistic centers



A+

LED

50,000 HOURS

5 YEARS WARRANTY

IP65

130Lm/w

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT45-19112	Hibay-PSL	Grey	4000K	100W	13000Lm	220V-240VAC	>70	>0.95	90°	Aluminium	1
BT45-19132	Hibay-PSL	Grey	6500K	100W	13000Lm	220V-240VAC	>70	>0.95	90°	Aluminium	1
BT45-19412	Hibay-PSL	Grey	4000K	150W	19500Lm	220V-240VAC	>70	>0.95	90°	Aluminium	1
BT45-19432	Hibay-PSL	Grey	6500K	150W	19500Lm	220V-240VAC	>70	>0.95	90°	Aluminium	1
BT45-19612	Hibay-PSL	Grey	4000K	200W	26000Lm	220V-240VAC	>70	>0.95	90°	Aluminium	1
BT45-19632	Hibay-PSL	Grey	6500K	200W	26000Lm	220V-240VAC	>70	>0.95	90°	Aluminium	1

 This luminaire contains built-in LED lamps.











The lamps cannot be changed in the luminaire.


BRAYTRON 874/2012



100W



150W



200W

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS


Hg 0.0mg

IP 65

Non-Flammable

25,000

-20°C +40°C



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Made from aluminium
- Energy efficient and long lasting
- Saves up to %80 energy
- Directional illuminance
- With Surface mount bracket
- Ingress Protection against water
- Suitable for indoor & outdoor ceiling use

Applications

- General outdoor lighting
- High-Ceiling Store
- Parking lots, Warehouses
- Factories and logistic centers



A⁺


LED

IP65

50,000 HOURS

100Lm/w

5 YEARS WARRANTY

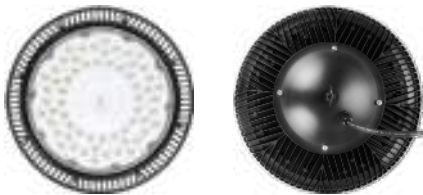

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT45-09112	Hibay-ESL	Grey	4000K	100W	10000Lm	220V-240VAC	>70	>0.95	90°	Aluminium	1
BT45-09132	Hibay-ESL	Grey	6500K	100W	10000Lm	220V-240VAC	>70	>0.95	90°	Aluminium	1
BT45-09612	Hibay-ESL	Grey	4000K	200W	20000Lm	220V-240VAC	>70	>0.95	90°	Aluminium	1
BT45-09632	Hibay-ESL	Grey	6500K	200W	20000Lm	220V-240VAC	>70	>0.95	90°	Aluminium	1

This luminaire contains built-in LED lamps.

A⁺⁺

A⁺

A

C

D


E

LED


The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012



CE ENEC LVD EMC ErP COMPLIANT RoHS EXEMPTED Hg 0.0mg IP 65 Non-halogenated > 25,000 -20°C +40°C



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

**Product Benefits**

- Easy & quick installation
- Energy efficient and long lasting
- Slim design
- Made of aluminium body
- Built-in driver
- Polyester powder coating for outdoor use
- Tempered Glass

Application

- General outdoor lighting
- Home garden backyards
- Industrial halls
- Warehouses
- Indoor & outdoor light show areas
- Open area parking lots

A⁺

LED

20,000 HOURS

3 YEARS WARRANTY

IP65


MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT61-01002	Flood-SL	Grey	3000K	10W	800Lm	220V-240VAC	>70	>0.55	120°	Aluminium	36
BT61-01032	Flood-SL	Grey	6500K	10W	800Lm	220V-240VAC	>70	>0.55	120°	Aluminium	36
BT61-02002	Flood-SL	Grey	3000K	20W	1800Lm	220V-240VAC	>70	>0.55	120°	Aluminium	30
BT61-02032	Flood-SL	Grey	6500K	20W	1800Lm	220V-240VAC	>70	>0.55	120°	Aluminium	30
BT61-03002	Flood-SL	Grey	3000K	30W	2700Lm	220V-240VAC	>70	>0.95	120°	Aluminium	20
BT61-03032	Flood-SL	Grey	6500K	30W	2700Lm	220V-240VAC	>70	>0.95	120°	Aluminium	20
BT61-05002	Flood-SL	Grey	3000K	50W	4800Lm	220V-240VAC	>70	>0.95	120°	Aluminium	12
BT61-05032	Flood-SL	Grey	6500K	50W	4800Lm	220V-240VAC	>70	>0.95	120°	Aluminium	12

 This luminaire contains built-in LED lamps.

 LED

 The lamps cannot be changed in the luminaire.

BRAYTRON 874/2012

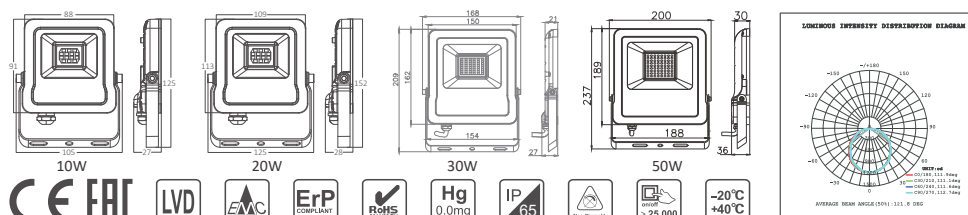

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Slim design
- Made of aluminium body
- Built-in driver
- Polyester powder coating for outdoor use
- Tempered Glass

Application

- General outdoor lighting
- Home garden backyards
- Industrial halls
- Warehouses
- Indoor & outdoor light show areas
- Open area parking lots



A+

LED

20,000 HOURS

2 YEARS WARRANTY

IP44


SENSOR

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT61-23002	Flood-SL	Grey	3000K	30W	2400Lm	220V-240VAC	>70	>0.95	120°	Aluminium	20
BT61-23032	Flood-SL	Grey	6500K	30W	2400Lm	220V-240VAC	>70	>0.95	120°	Aluminium	20



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

BRAYTRON 874/2012



Power consumption : 0.45W (static 0.1W)
 Time delay : Min.5sec-Max.5min.(adjustable)
 Detection angle : 120°
 Detection distance : Max.8m (<240)
 Detection speed : 0.6-1.5m/s
 Ambient light : <3-2000lux
 Installation height : 1.8m-3.5m



CE ENEC

LVD

EMC

ErP

RoHS

Hg 0.0mg

IP44

Max. 8m

> 25,000

-20°C +40°C

*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com



Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Slim design
- Made of aluminium body
- Built-in driver
- Polyester powder coating for outdoor use
- Tempered Glass

Application

- General outdoor lighting
- Home garden backyards
- Industrial halls
- Warehouses
- Indoor & outdoor light show areas
- Open area parking lots



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT61-09102	Flood-SL	Grey	3000K	100W	10000Lm	220V-240VAC	>70	>0.95	120°	Aluminium	4
BT61-09132	Flood-SL	Grey	6500K	100W	10000Lm	220V-240VAC	>70	>0.95	120°	Aluminium	4
BT61-09402	Flood-SL	Grey	3000K	150W	15000Lm	220V-240VAC	>70	>0.95	120°	Aluminium	3
BT61-09432	Flood-SL	Grey	6500K	150W	15000Lm	220V-240VAC	>70	>0.95	120°	Aluminium	3
BT61-09602	Flood-SL	Grey	3000K	200W	20000Lm	220V-240VAC	>70	>0.95	120°	Aluminium	2
BT61-09632	Flood-SL	Grey	6500K	200W	20000Lm	220V-240VAC	>70	>0.95	120°	Aluminium	2

 This luminaire contains built-in LED lamps.





The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

LED

A+, A, C, D, E



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Slim design
- Made of aluminium body
- Built-in driver
- Polyester powder coating for outdoor use
- Tempered Glass

Application

- General outdoor lighting
- Home garden backyards
- Industrial halls
- Warehouses
- Indoor & outdoor light show areas
- Open area parking lots



A+

LED

20,000 HOURS

3 YEARS WARRANTY

IP66

130Lm/w

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT61-19932	Flood-SL	D.Grey	6500K	400W	52000Lm	220V-240VAC	>70	>0.95	90°	Aluminium	1



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

BRAYTRON

A+

A+

A


C

D

E

LED

874/2012



CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS COMPLIANT


Hg 0.0mg

IP 66

Non-Flammable

> 25,000

-20°C +40°C



*Technical information indicated above may have tolerance ±%10. For final updated information please visit website www.braytron.com

**Product Benefits**



- Easy & quick installation
- Energy efficient and long lasting
- Slim design
- Made of aluminium body
- Built-in driver
- Polyester powder coating for outdoor use
- Tempered Glass

Application


- General outdoor lighting
- Home garden backyards
- Industrial halls
- Warehouses
- Indoor & outdoor light show areas
- Open area parking lots




MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT60-11002	Flood-SD	Grey	3000K	10W	900Lm	220V-240VAC	>70	>0.9	120°	Aluminium	40
BT60-11032	Flood-SD	Grey	6500K	10W	900Lm	220V-240VAC	>70	>0.9	120°	Aluminium	40
BT60-12002	Flood-SD	Grey	3000K	20W	1800Lm	220V-240VAC	>70	>0.9	120°	Aluminium	30
BT60-12032	Flood-SD	Grey	6500K	20W	1800Lm	220V-240VAC	>70	>0.9	120°	Aluminium	30
BT60-13002	Flood-SD	Grey	3000K	30W	2700Lm	220V-240VAC	>70	>0.9	120°	Aluminium	20
BT60-13032	Flood-SD	Grey	6500K	30W	2700Lm	220V-240VAC	>70	>0.9	120°	Aluminium	20
BT60-13052	Flood-SD	Grey	Green	30W	2700Lm	220V-240VAC	>70	>0.9	120°	Aluminium	20
BT60-15002	Flood-SD	Grey	3000K	50W	4500Lm	220V-240VAC	>70	>0.9	120°	Aluminium	10
BT60-15032	Flood-SD	Grey	6500K	50W	4500Lm	220V-240VAC	>70	>0.9	120°	Aluminium	10
BT60-15052	Flood-SD	Grey	Green	50W	4500Lm	220V-240VAC	>70	>0.9	120°	Aluminium	10

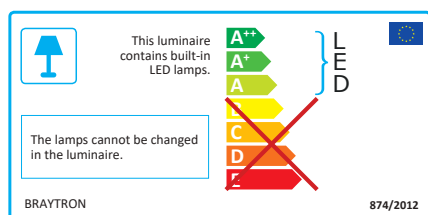


10W




20W



30W



50W



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Slim design
- Made of aluminium body
- Built-in driver
- Polyester powder coating for outdoor use
- Tempered Glass

Application

- General outdoor lighting
- Home garden backyards
- Industrial halls
- Warehouses
- Indoor & outdoor light show areas
- Open area parking lots



LED

20,000 HOURS

2 YEARS WARRANTY

IP65

MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT60-19102	Flood-SD	Grey	3000K	100W	9000Lm	220V-240VAC	>70	>0.9	120°	Aluminium	5
BT60-19132	Flood-SD	Grey	6500K	100W	9000Lm	220V-240VAC	>70	>0.9	120°	Aluminium	5
BT60-19402	Flood-SD	Grey	3000K	150W	13500Lm	220V-240VAC	>70	>0.9	120°	Aluminium	3
BT60-19432	Flood-SD	Grey	6500K	150W	13500Lm	220V-240VAC	>70	>0.9	120°	Aluminium	3
BT60-19602	Flood-SD	Grey	3000K	200W	18000Lm	220V-240VAC	>70	>0.9	120°	Aluminium	3
BT60-19632	Flood-SD	Grey	6500K	200W	18000Lm	220V-240VAC	>70	>0.9	120°	Aluminium	3

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED

BRAYTRON

874/2012

CE

EAC

LVD

EMC

ErP

RoHS

Hg 0.0mg

IP 65

Non-Flammable

25,000

-26°C

+40°C

*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

**Product Benefits**




- Easy & quick installation
- Energy efficient and long lasting
- Slim design
- Made of aluminium body
- Built-in driver
- Polyester powder coating for outdoor use
- Tempered Glass

Application

- General outdoor lighting
- Home garden backyards
- Industrial halls
- Warehouses
- Indoor & outdoor light show areas
- Open area parking lots



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT60-09802	Flood-SD	Grey	3000K	300W	27000Lm	220V-240VAC	>70	>0.95	120°	Aluminium	2
BT60-09832	Flood-SD	Grey	6500K	300W	27000Lm	220V-240VAC	>70	>0.95	120°	Aluminium	2

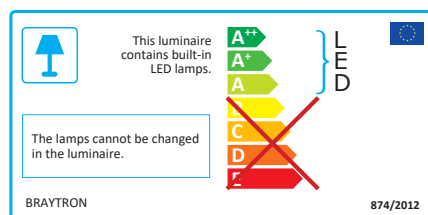

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Easy & quick installation
- Energy efficient and long lasting
- Slim design
- Made of aluminium body
- Built-in driver
- Polyester powder coating for outdoor use
- Tempered Glass

Application

- General outdoor lighting
- Home garden backyards
- Industrial halls
- Warehouses
- Indoor & outdoor light show areas
- Open area parking lots




MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT60-22002	Flood-SD	Grey	3000K	20W	1800Lm	220V-240VAC	>70	>0.95	120°	Aluminium	20
BT60-22032	Flood-SD	Grey	6500K	20W	1800Lm	220V-240VAC	>70	>0.95	120°	Aluminium	20
BT60-23002	Flood-SD	Grey	3000K	30W	2700Lm	220V-240VAC	>70	>0.95	120°	Aluminium	20
BT60-23032	Flood-SD	Grey	6500K	30W	2700Lm	220V-240VAC	>70	>0.95	120°	Aluminium	20
BT60-25002	Flood-SD	Grey	3000K	50W	4500Lm	220V-240VAC	>70	>0.95	120°	Aluminium	10
BT60-25032	Flood-SD	Grey	6500K	50W	4500Lm	220V-240VAC	>70	>0.95	120°	Aluminium	10



This luminaire contains built-in LED lamps.


The lamps cannot be changed in the luminaire.

BRAYTRON




LED

874/2012



Power consumption : 0.45W(static 0.1W)
Time delay : Min.5sec.-Max.5min.(adjustable)
Detection angle : 120°
Detection distance : Max.8m (<240°)
Detection speed : 0.6-1.5m/s
Ambient light : <3-2000Lux
Installation height : 1.8m-3.5m



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Made of aluminium body
- Built-in driver
- Polyester powder coating for outdoor use
- Tempered Glass
- IK08 Mechanical external impact
- IP67 waterproof and dustproof
- Surge protection, L to L 4kv, L to G 2kv
- Suitable for outdoor use

Application

- General outdoor lighting
- Home garden backyards
- Public parks & gardens
- Factory backyards
- Indoor & outdoor light show areas



Powered by

SAMSUNG LED

TRIDONIC




MODEL NO	TYPE	BODY COLOR	CCT	LED PCS	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT47-00107	Wall Washer	Grey	3000K	6	6W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00117	Wall Washer	Grey	4000K	6	6W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00137	Wall Washer	Grey	6500K	6	6W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00147	Wall Washer	Grey	Red	6	6W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00157	Wall Washer	Grey	Green	6	6W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00167	Wall Washer	Grey	Blue	6	6W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00177	Wall Washer	Grey	Amber	6	6W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00197	Wall Washer	Grey	RGB	6	6W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00207	Wall Washer	Grey	3000K	9	9W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00217	Wall Washer	Grey	4000K	9	9W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00237	Wall Washer	Grey	6500K	9	9W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00247	Wall Washer	Grey	Red	9	9W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00257	Wall Washer	Grey	Green	9	9W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00267	Wall Washer	Grey	Blue	9	9W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00277	Wall Washer	Grey	Amber	9	9W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10
BT47-00297	Wall Washer	Grey	RGB	9	9W	600Lm	220V-240VAC	>70	>0.5	15°/ 25°/ 45°	Aluminium	10

This luminaire contains built-in LED lamps.


The lamps cannot be changed in the luminaire.

BRAYTRON 874/2012

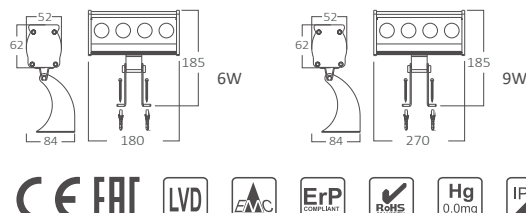

Optional Accessories

.Optional Mean Well Driver



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features



- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Made of aluminium body
- Built-in driver
- Polyester powder coating for outdoor use
- Tempered Glass
- IK08 Mechanical external impact
- IP67 waterproof and dustproof
- Surge protection, L to L 4kv, L to G 2kv
- Suitable for outdoor use

Application


- General outdoor lighting
- Home garden backyards
- Public parks & gardens
- Factory backyards
- Indoor & outdoor light show areas



MODEL NO	TYPE	BODY COLOR	CCT	LED PCS	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT47-00307	Wall Washer	Grey	3000K	12	12W	1200Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00317	Wall Washer	Grey	4000K	12	12W	1200Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00337	Wall Washer	Grey	6500K	12	12W	1200Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00347	Wall Washer	Grey	Red	12	12W	1200Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00357	Wall Washer	Grey	Green	12	12W	1200Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00367	Wall Washer	Grey	Blue	12	12W	1200Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00377	Wall Washer	Grey	Amber	12	12W	1200Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00397	Wall Washer	Grey	RGB	12	12W	1200Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00407	Wall Washer	Grey	3000K	18	18W	1800Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00417	Wall Washer	Grey	4000K	18	18W	1800Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00437	Wall Washer	Grey	6500K	18	18W	1800Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00447	Wall Washer	Grey	Red	18	18W	1800Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00457	Wall Washer	Grey	Green	18	18W	1800Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00467	Wall Washer	Grey	Blue	18	18W	1800Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00477	Wall Washer	Grey	Amber	18	18W	1800Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10
BT47-00497	Wall Washer	Grey	RGB	18	18W	1800Lm	220V-240VAC	>70	>0.5	15°/25°/45°	Aluminium	10

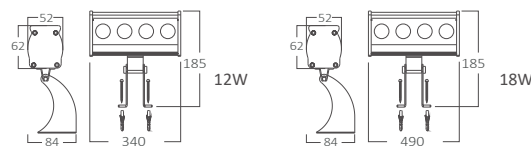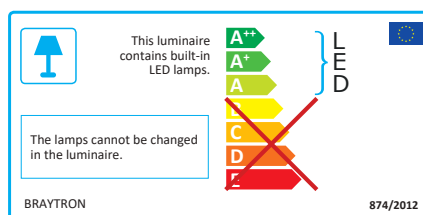

Optional Accessories
Optional Mean Well Driver



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Made of aluminium body
- Built-in driver
- Polyester powder coating for outdoor use
- Tempered Glass
- IK08 Mechanical external impact
- IP67 waterproof and dustproof
- Surge protection, L to L 4kv, L to G 2kv
- Suitable for outdoor use

Application

- General outdoor lighting
- Home garden backyards
- Public parks & gardens
- Factory backyards
- Indoor & outdoor light show areas





Powered by

SAMSUNG LED TRIDONIC




MODEL NO	TYPE	BODY COLOR	CCT	LED PCS	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT47-00507	Wall Washer	Grey	3000K	24	24W	2400Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	10
BT47-00517	Wall Washer	Grey	4000K	24	24W	2400Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	10
BT47-00537	Wall Washer	Grey	6500K	24	24W	2400Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	10
BT47-00547	Wall Washer	Grey	Red	24	24W	2400Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	10
BT47-00557	Wall Washer	Grey	Green	24	24W	2400Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	10
BT47-00567	Wall Washer	Grey	Blue	24	24W	2400Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	10
BT47-00577	Wall Washer	Grey	Amber	24	24W	2400Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	10
BT47-00597	Wall Washer	Grey	RGB	24	24W	2400Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	10
BT47-00607	Wall Washer	Grey	3000K	36	36W	3600Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00617	Wall Washer	Grey	4000K	36	36W	3600Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00637	Wall Washer	Grey	6500K	36	36W	3600Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00647	Wall Washer	Grey	Red	36	36W	3600Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00657	Wall Washer	Grey	Green	36	36W	3600Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00667	Wall Washer	Grey	Blue	36	36W	3600Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00677	Wall Washer	Grey	Amber	36	36W	3600Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00697	Wall Washer	Grey	RGB	36	36W	3600Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5

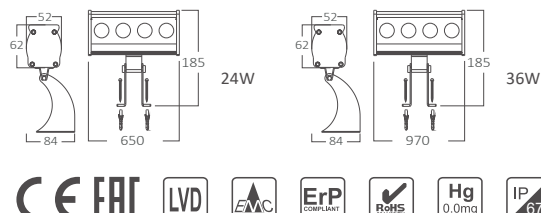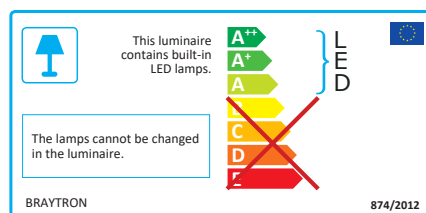

Optional Accessories

.Optional Mean Well Driver




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features



- Easy & quick installation
- Energy efficient and long lasting
- Directional illuminance
- Made of aluminium body
- Built-in driver
- Polyester powder coating for outdoor use
- Tempered Glass
- IK08 Mechanical external impact
- IP67 waterproof and dustproof
- Surge protection, L to L 4kv, L to G 2kv
- Suitable for outdoor use

Application


- General outdoor lighting
- Home garden backyards
- Public parks & gardens
- Factory backyards
- Indoor & outdoor light show areas

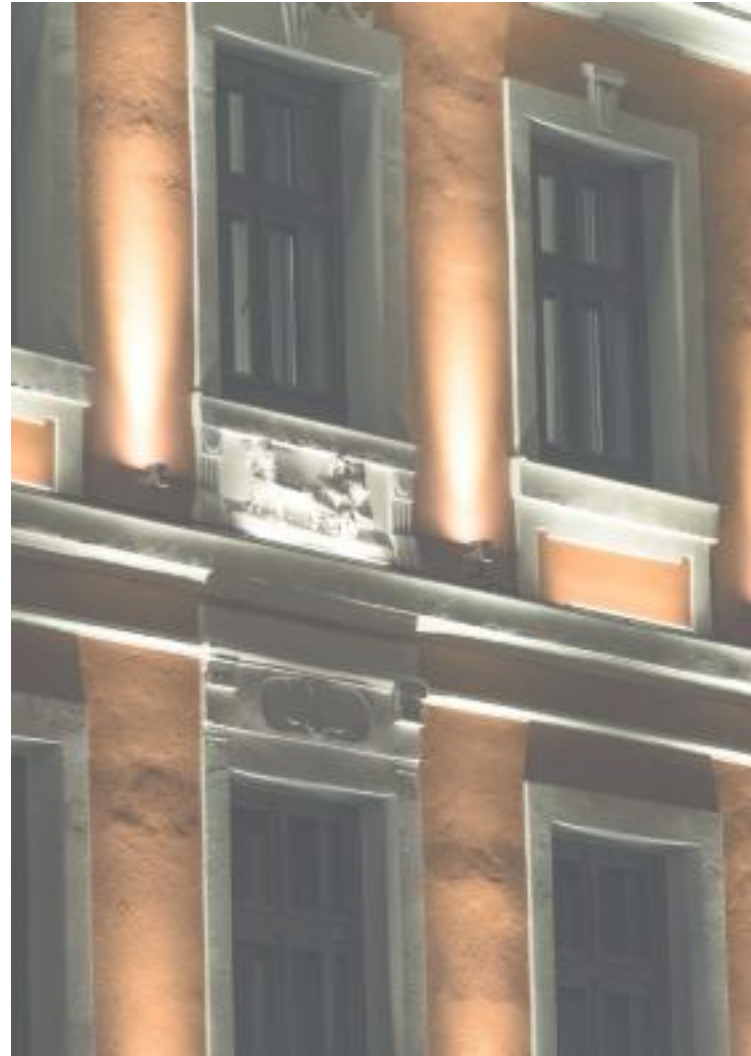


MODEL NO	TYPE	BODY COLOR	CCT	LED PCS	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT47-00707	Wall Washer	Grey	3000K	48	48W	4800Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00717	Wall Washer	Grey	4000K	48	48W	4800Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00737	Wall Washer	Grey	6500K	48	48W	4800Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00747	Wall Washer	Grey	Red	48	48W	4800Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00757	Wall Washer	Grey	Green	48	48W	4800Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00767	Wall Washer	Grey	Blue	48	48W	4800Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00777	Wall Washer	Grey	Amber	48	48W	4800Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5
BT47-00797	Wall Washer	Grey	RGB	48	48W	4800Lm	220V-240VAC	>70	>0.95	15°/ 25°/ 45°	Aluminium	5

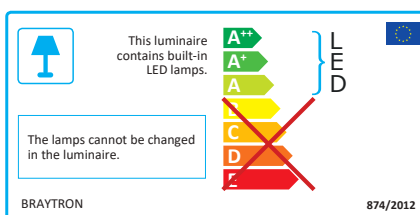

Optional Accessories
Optional Mean Well Driver



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

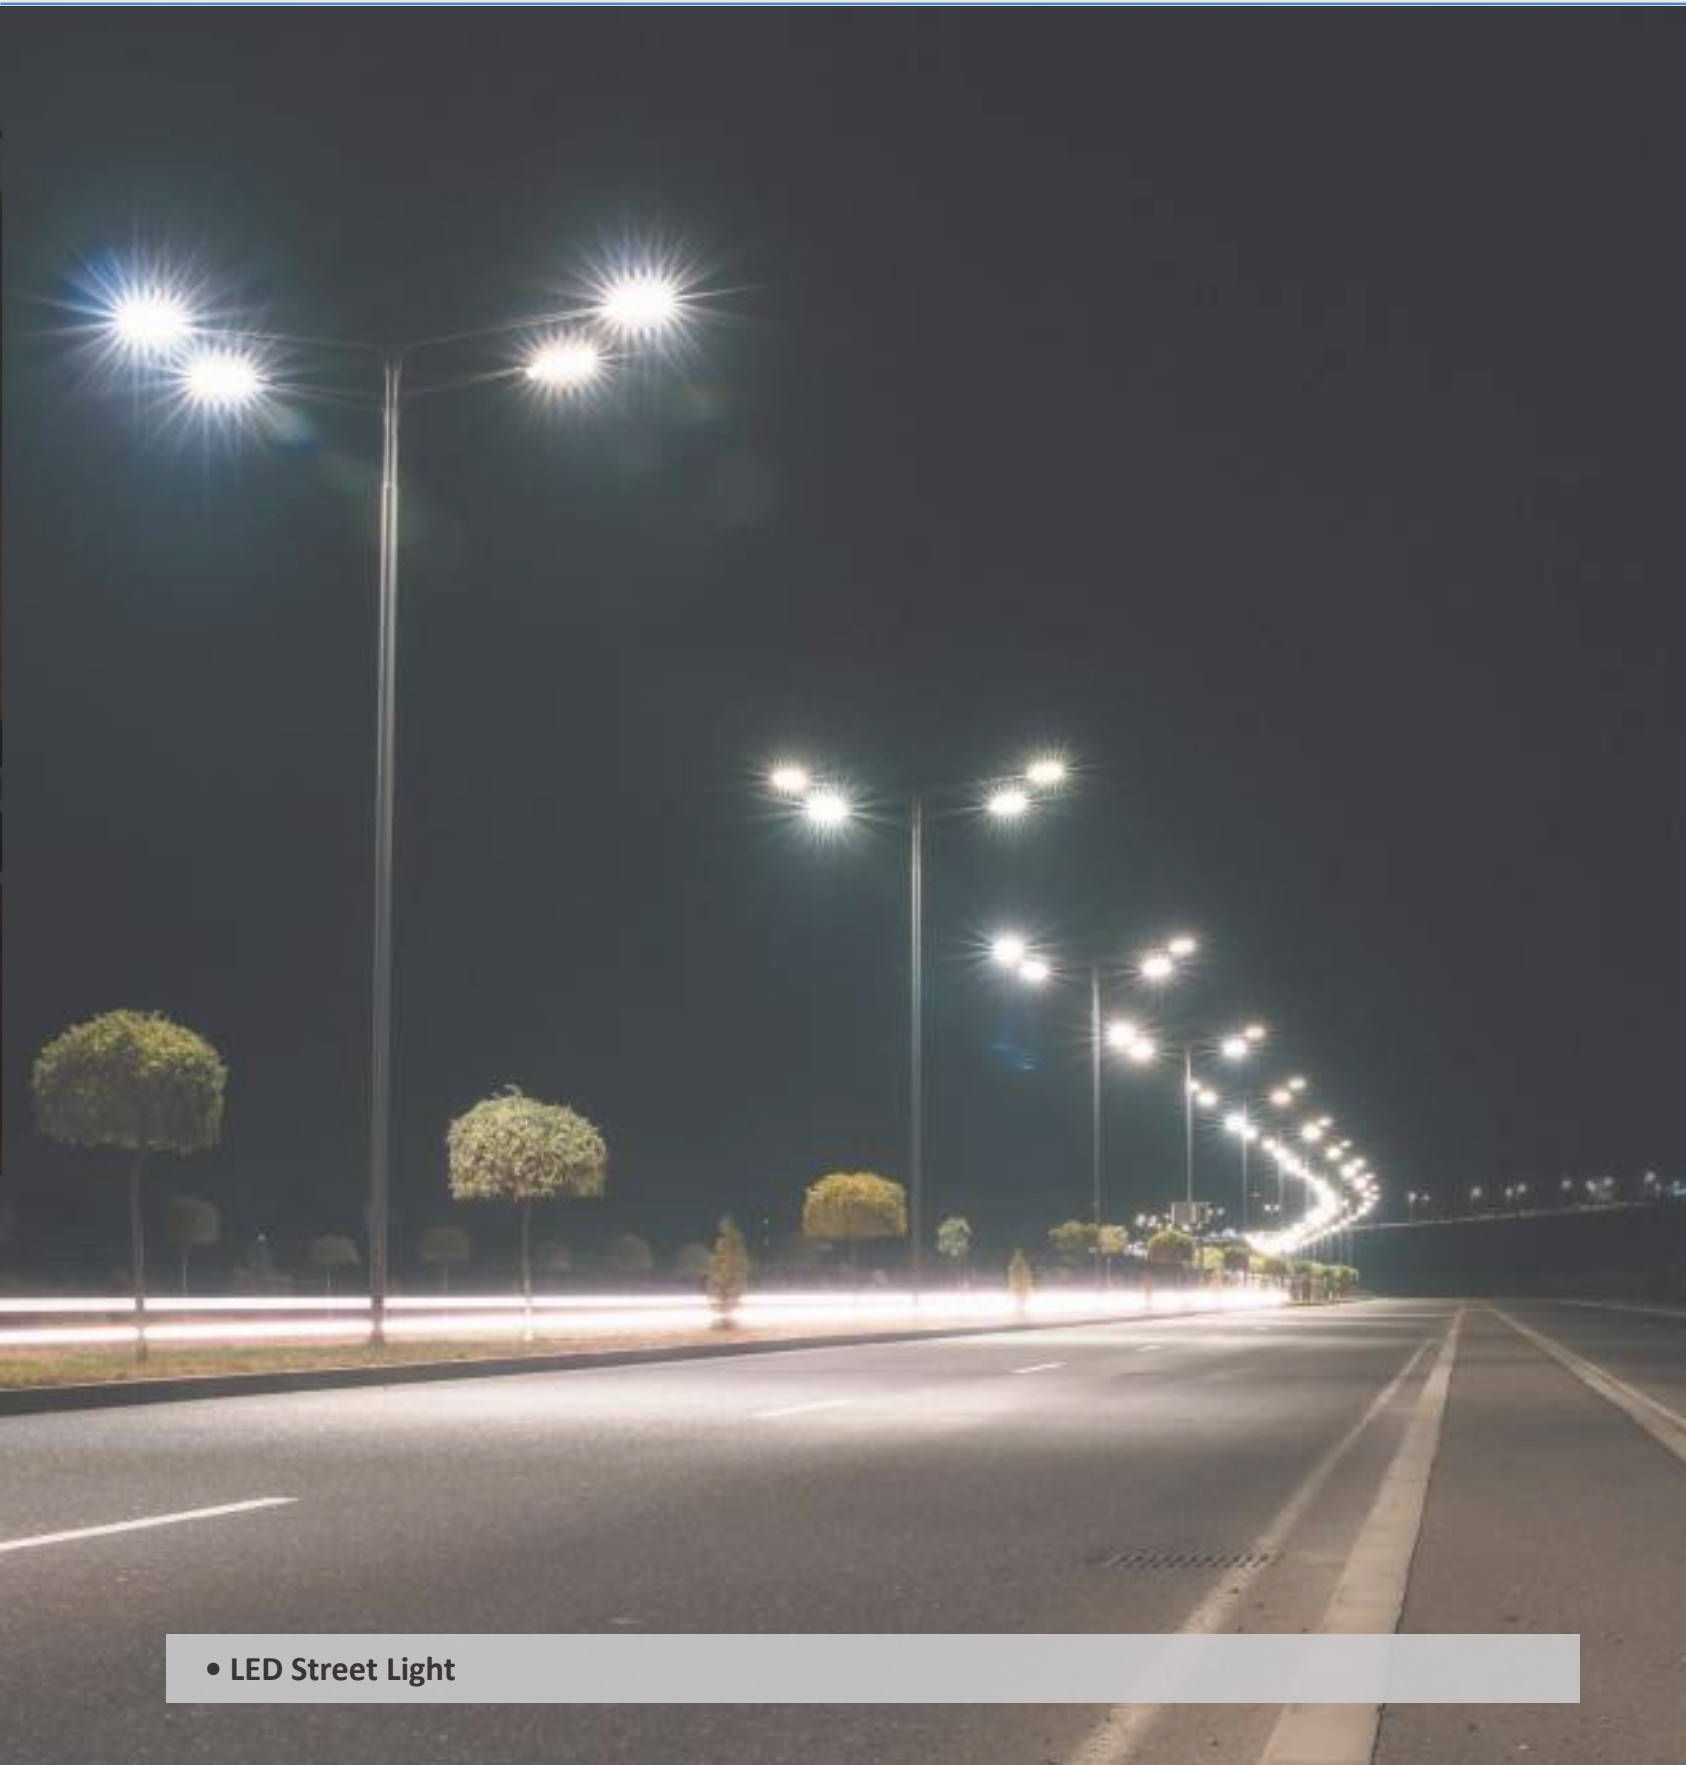

• LED Street Light

Product Benefits




- Made from pure die-casting aluminium
- Diffused by Reflector, Suitable for outdoor use
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 2kv, L to G 1kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Low energy consumption

Application

- General outdoor lighting
- Garden backyards
- Factory backyards
- Open area parking lots
- Public parks & gardens
- Outdoor indoor areas



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT40-03032	Ufo	Grey	6500K	30W	3300Lm	220V-240VAC	>70	>0.95	65°x135°	Aluminium	1
BT40-05032	Ufo	Grey	6500K	50W	5500Lm	220V-240VAC	>70	>0.95	65°x135°	Aluminium	1
BT40-06032	Ufo	Grey	6500K	60W	6600Lm	220V-240VAC	>70	>0.95	65°x135°	Aluminium	1
BT40-08032	Ufo	Grey	6500K	80W	8800Lm	220V-240VAC	>70	>0.95	65°x135°	Aluminium	1
BT40-09132	Ufo	Grey	6500K	100W	11000Lm	220V-240VAC	>70	>0.95	65°x135°	Aluminium	1

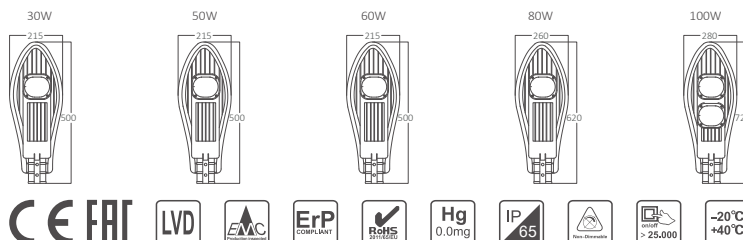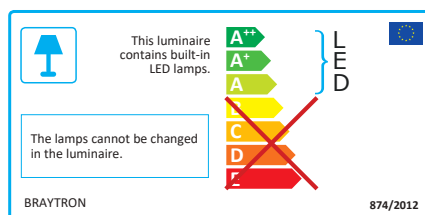

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features




- Made from pure die-casting aluminium
- Diffused by PC lens, Suitable For streets
- Built-in high quality AC-Direct driver
- Surge Protection, L to L2kv, L to G 1kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Adjustable for different size of pole
- Smart design for better heat dissipation
- Low energy consumption

Application

- Streets & highways
- Garden backyard
- Factory backyards
- Open area parking lots
- Public parks & gardens



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT42-03032	ST81	Grey	6500K	30W	3000Lm	220V-240VAC	>70	>0.95	110°	Aluminium	1
BT42-05032	ST81	Grey	6500K	50W	5000Lm	220V-240VAC	>70	>0.95	110°	Aluminium	1
BT42-09132	ST81	Grey	6500K	100W	10000Lm	220V-240VAC	>70	>0.95	110°	Aluminium	1

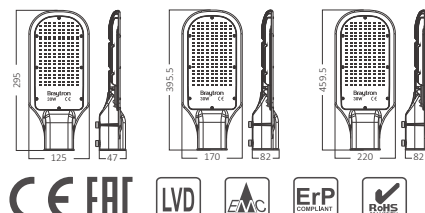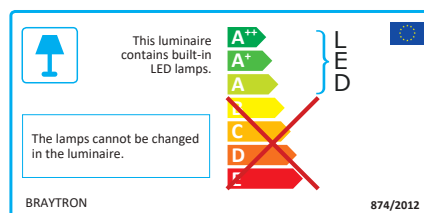

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Features



- Made from pure die-casting aluminium
- Diffused by PC lens, Suitable For streets
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 4 kV L to G 2kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Adjustable for different size of pole
- Smart design for better heat dissipation
- Low energy consumption

Application

- Streets & highways
- Garden backyard
- Factory backyards
- Open area parking lots
- Public parks & gardens



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT42-83032	ST83	Grey	6500K	30W	3300Lm	220V-240VAC	>70	>0.95	70x140°	Aluminium	10
BT42-85032	ST83	Grey	6500K	50W	5500Lm	220V-240VAC	>70	>0.95	70x140°	Aluminium	6
BT42-89132	ST83	Grey	6500K	100W	11000Lm	220V-240VAC	>70	>0.95	70x140°	Aluminium	4
BT42-89432	ST83	Grey	6500K	150W	16500Lm	220V-240VAC	>70	>0.95	70x140°	Aluminium	1
BT42-89632	ST83	Grey	6500K	200W	22000Lm	220V-240VAC	>70	>0.95	70x140°	Aluminium	1

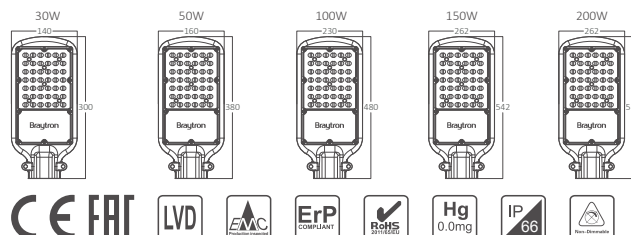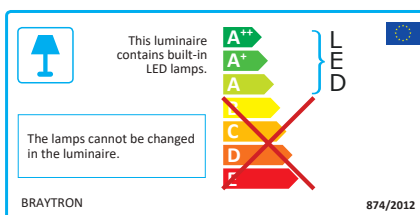

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



Features

- Made from pure die-casting aluminium
- Diffused by PC lens, Suitable For streets
- Built-in high quality AC-Direct driver
- Surge Protection, L to L 10kv, L to G 6kv
- IK08 Mechanical external impact
- Polyester powder coating for outdoor use
- Adjustable for different size of pole
- Smart design for better heat dissipation
- Low energy consumption

Application



- Streets & highways
- Garden backyard
- Factory backyards
- Open area parking lots
- Public parks & gardens



Powered by
PHILIPS LED



MODEL NO	TYPE	BODY COLOR	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BT42-53032	ST95	Grey	6500K	30W	3900Lm	220V-240VAC	>70	>0.95	70x140°	Aluminium	1
BT42-55032	ST95	Grey	6500K	50W	6500Lm	220V-240VAC	>70	>0.95	70x140°	Aluminium	1
BT42-59132	ST95	Grey	6500K	100W	13000Lm	220V-240VAC	>70	>0.95	70x140°	Aluminium	1
BT42-59432	ST95	Grey	6500K	150W	19500Lm	220V-240VAC	>70	>0.95	70x140°	Aluminium	1

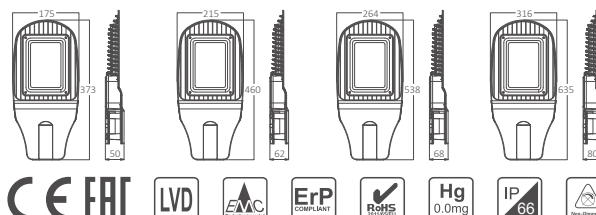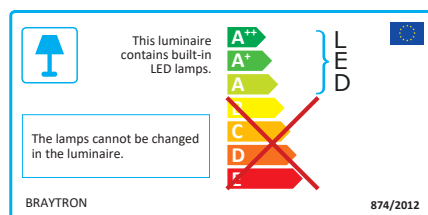

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



- LED INDOOR EMERGENCY EXIT LAMPS
- LED OUTDOOR EMERGENCY EXIT LAMPS
- LED RECHARGEABLE LAMPS



Product Benefits

- Operates in main supply and emergency mode
- Protection against battery overcharge
- Equipped with Auto-test function
- Fitting designed to be used with any kind of pictogram
- include maintained and non-maintained functions
- Designed to be suitable for waterproof and dustproof
- Suitable for surface and recessed use

Applications

- Public buildings
- Commercial Buildings
- Schools, Hospitals
- Parking lots

PICTOGRAMS



BC14-01303



BC14-01301



BC14-01304



BC14-01307



MODEL NO	BC14-00900
BODY COLOR	White
WATT	5W
VOLTAGE	220V-240VAC
EMERGENCY MODE	Maintained and Non-Maintained
WORKING TIME	180 Minutes
CHARGING TIME	24 Hours
VIEW DISTANCE	25 Mt
BATTERY	Lithium 3.7V-2200mAH
IP	IP65
CLASS	CLASS II
MATERIAL	Non-Flammable Plastic
PCS/CTN	10

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

A++

A+

A

B

C

D

E

F

G


LED

LED

20,000 HOURS

2 YEARS WARRANTY

IP65



CE

EMC

LVD

RoHS

IP65

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Operates in main supply and emergency mode
- Protection against battery overcharge
- Equipped with auto-test function
- Fitting designed to be used with any kind of pictogram
- Maintained function
- Suitable for surface ceiling and wall use

Applications

- Public buildings
- Commercial Buildings
- Schools, Hospitals
- Parking lots



BC14-01301



BC14-01302



BC14-01310



BC14-01306



BC14-01304



BC14-01303





BC14-01305



BC14-01307



MODEL NO	BC14-01100
BODY COLOR	White
WATT	3W
VOLTAGE	220V-240VAC
EMERGENCY MODE	Maintained
WORKING TIME	180 Minutes
CHARGING TIME	24 Hours
VIEW DISTANCE	25 Mt
BATTERY	1000mAh Ni-MH
IP	IP20
CLASS	CLASS II
MATERIAL	Non-Flammable Plastic
PCS/CTN	20

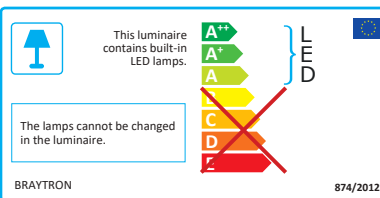

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




Product Benefits



- Operates in main supply and emergency mode
- Protection against battery overcharge
- Equipped with auto-test function
- Fitting designed to be used with any kind of pictogram
- Maintained function
- Suitable for ceiling use

Applications

- Public buildings
- Commercial Buildings
- Schools, Hospitals
- Parking lots

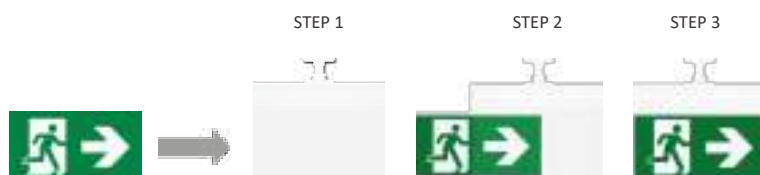

MODEL NO	BC14-01120
BODY COLOR	White
WATT	3W
VOLTAGE	220V-240VAC
EMERGENCY MODE	Maintained
WORKING TIME	180 Minutes
CHARGING TIME	24 Hours
VIEW DISTANCE	25 Mt
BATTERY	1000mAh Ni-MH
IP	IP20
CLASS	CLASS II
MATERIAL	Non-Flammable Plastic
PCS/CTN	20

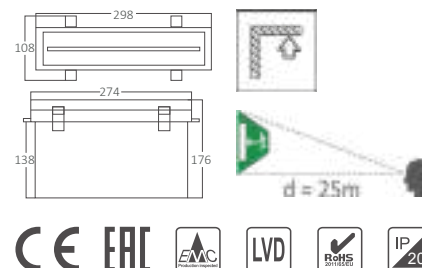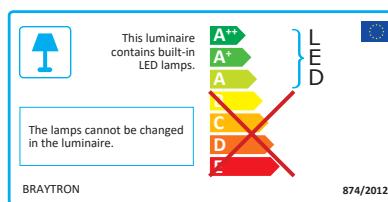

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

Product Benefits

- Operates in main supply and emergency mode
- Protection against battery overcharge
- Equiped with auto-test function
- Built-in lithium battery
- AC-DC function
- Suitable for ceiling use

Applications

- Puplic buildings
- Commercial Buildings
- Schools, Hospitals
- Parking lots



MODEL NO	CCT	WATT	LED QTY	WORKING TIME	CHARGING TIME	BATTERY	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BC01-00130	6500K	2W	30 Led	3/7 Hours	24 Hours	3.7V 1.2AH Lithium	220V-240VAC	>70	>0.95	120°	Plastic	20
BC01-00330	6500K	4W	60 Led	3/7 Hours	24 Hours	3.7V 2.2AH Lithium	220V-240VAC	>70	>0.95	120°	Plastic	20

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

BRAYTRON

874/2012

LED

A++

A+

A

C

D

E

2W

4W

CE


EMC

LVD

EMC

RoHS

IP20



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com

Braytron

lighting expert

ADVANCE | LED Bulb Family

*Ecological
Friendly
Efficient
Low Consumption*





www.braytron.com

Smart Bulb



CCT

MODEL NO	TYPE	SOCKET	CCT	WATT	LUMEN	VOLTAGE	P.F.	BEAM ANGLE	MATERIAL	PCS/CTN
BA13-00929	A60	E27	RGB	9W	806Lm	220V-240VAC	>0.5	220°	Alm+Plastic	60




Smart Bulb



CCT


MODEL NO	TYPE	SOCKET	CCT	WATT	LUMEN	VOLTAGE	P.F.	BEAM ANGLE	MATERIAL	PCS/CTN
BA24-00559	MR16	GU10	RGB	5W	400Lm	220V-240VAC	>0.5	110°	Alm+Plastic	100




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA07-00510	C37-Tail	E14	3000K	5W	35W	400Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA07-00513	C37-Tail	E14	6500K	5W	35W	400Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100

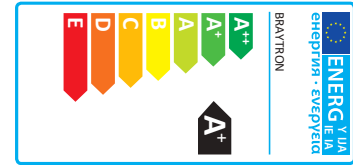


MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA09-00510	C37	E14	3000K	5W	35W	400Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA09-00511	C37	E14	4000K	5W	35W	400Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA09-00513	C37	E14	6500K	5W	35W	400Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100

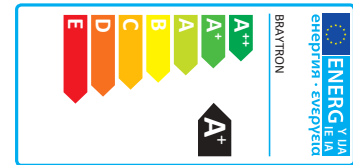

MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA09-00710	C37	E14	3000K	7W	45W	560Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA09-00711	C37	E14	4000K	7W	45W	560Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA09-00713	C37	E14	6500K	7W	45W	560Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100

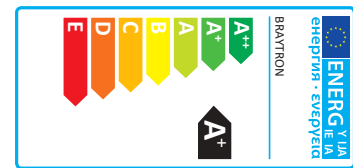

MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA09-00520	C37	E27	3000K	5W	35W	400Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA09-00523	C37	E27	6500K	5W	35W	400Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100

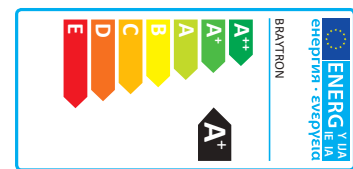

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA11-00510	P45	E14	3000K	5W	35W	400Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA11-00511	P45	E14	4000K	5W	35W	400Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA11-00513	P45	E14	6500K	5W	35W	400Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA11-00710	P45	E14	3000K	7W	45W	560Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA11-00713	P45	E14	6500K	7W	45W	560Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA11-00520	G45	E27	3000K	5W	35W	400Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA11-00521	G45	E27	4000K	5W	35W	400Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA11-00523	G45	E27	6500K	5W	35W	400Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA11-00720	G45	E27	3000K	7W	45W	560Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA11-00723	G45	E27	6500K	7W	45W	560Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS


Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA13-01220	A60	E27	3000K	12W	75W	1055Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA13-01221	A60	E27	4000K	12W	75W	1055Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA13-01223	A60	E27	6500K	12W	75W	1055Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS


Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA13-01520	A65	E27	3000K	15W	90W	1350Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA13-01521	A65	E27	4000K	15W	90W	1350Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA13-01523	A65	E27	6500K	15W	90W	1350Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS


Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA13-01820	A70	E27	3000K	18W	110W	1650Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100
BA13-01823	A70	E27	6500K	18W	110W	1650Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA14-50720	A60-Sensor	E27	3000K	7W	40W	470Lm	220V-240VAC	>80	>0.5	360°	Alm+Plastic	100
BA14-50723	A60-Sensor	E27	6500K	7W	40W	470Lm	220V-240VAC	>80	>0.5	360°	Alm+Plastic	100
BA14-50920	A60-Sensor	E27	3000K	9W	50W	650Lm	220V-240VAC	>80	>0.5	320°	Alm+Plastic	100
BA14-50923	A60-Sensor	E27	6500K	9W	50W	650Lm	220V-240VAC	>80	>0.5	320°	Alm+Plastic	100

LED

25,000 HOURS

2 YEARS WARRANTY



CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500


-20°C +40°C




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA14-01020	A60-Dimmable	E27	3000K	10W	60W	806Lm	220V-240VAC	>80	>0.8	180°	Alm+Plastic	100
BA14-01021	A60-Dimmable	E27	4200K	10W	60W	806Lm	220V-240VAC	>80	>0.8	180°	Alm+Plastic	100

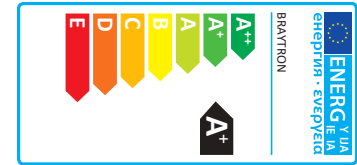


MODEL NO	CCT	WATT(AC)	WATT(DC)	WORKING TIME	CHARGING TIME	LUMINOUS	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA14-30823	6500K	8W	3W	3 Hours	10 Hours	500Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	50

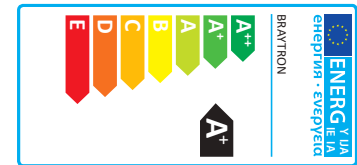

MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA33-01420	G95	E27	3000K	14W	85W	1220Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	32
BA33-01423	G95	E27	6500K	14W	85W	1220Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	32

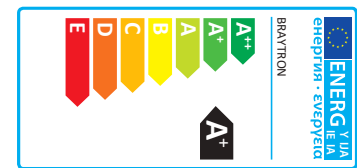

MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA34-00610	R50	E14	3000K	6W	45W	550Lm	220V-240VAC	>80	>0.5	150°	Alm+Plastic	100
BA34-00613	R50	E14	6500K	6W	45W	550Lm	220V-240VAC	>80	>0.5	150°	Alm+Plastic	100

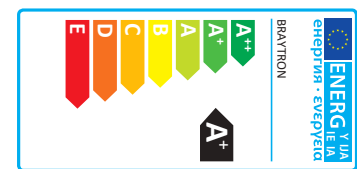

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA34-00920	R63	E27	3000K	9W	60W	830Lm	220V-240VAC	>80	>0.5	150°	Alm+Plastic	100
BA34-00923	R63	E27	6500K	9W	60W	830Lm	220V-240VAC	>80	>0.5	150°	Alm+Plastic	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA13-02020	T80	E27	3000K	20W	125W	1620Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	20
BA13-02023	T80	E27	6500K	20W	125W	1620Lm	220V-240VAC	>80	>0.5	180°	Alm+Plastic	20

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA13-03020	T100	E27	3000K	30W	175W	2630Lm	220V-240VAC	>80	>0.9	180°	Alm+Plastic	20
BA13-03023	T100	E27	6500K	30W	175W	2630Lm	220V-240VAC	>80	>0.9	180°	Alm+Plastic	20

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA13-04020	T120	E27	3000K	40W	200W	3480Lm	220V-240VAC	>80	>0.9	180°	Alm+Plastic	16
BA13-04023	T120	E27	6500K	40W	200W	3480Lm	220V-240VAC	>80	>0.9	180°	Alm+Plastic	16

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA13-05020	T140	E27	3000K	50W	250W	4380Lm	220V-240VAC	>80	>0.9	180°	Alm+Plastic	20
BA13-05023	T140	E27	6500K	50W	250W	4380Lm	220V-240VAC	>80	>0.9	180°	Alm+Plastic	20



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA24-00550	MR16	GU10	2700K	5W	50W	400Lm	220V-240VAC	>80	>0.5	110°	Alm+Plastic	100
BA24-00551	MR16	GU10	4000K	5W	50W	400Lm	220V-240VAC	>80	>0.5	110°	Alm+Plastic	100
BA24-00553	MR16	GU10	6500K	5W	50W	400Lm	220V-240VAC	>80	>0.5	110°	Alm+Plastic	100

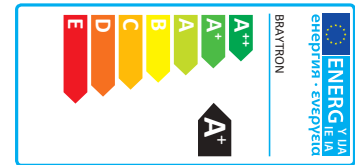

MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA24-00750	MR16	GU10	2700K	7W	75W	550Lm	220V-240VAC	>80	>0.5	110°	Alm+Plastic	100
BA24-00751	MR16	GU10	4000K	7W	75W	550Lm	220V-240VAC	>80	>0.5	110°	Alm+Plastic	100
BA24-00753	MR16	GU10	6500K	7W	75W	550Lm	220V-240VAC	>80	>0.5	110°	Alm+Plastic	100

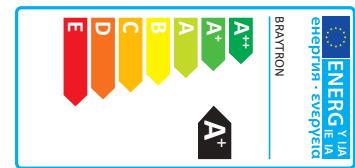

MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA24-00560	MR16	GU5.3	2700K	5W	50W	400Lm	220V-240VAC	>80	>0.5	110°	Alm+Plastic	100
BA24-00561	MR16	GU5.3	4000K	5W	50W	400Lm	220V-240VAC	>80	>0.5	110°	Alm+Plastic	100
BA24-00563	MR16	GU5.3	6500K	5W	50W	400Lm	220V-240VAC	>80	>0.5	110°	Alm+Plastic	100



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA24-30660	MR16	GU5.3	2700K	6W	45W	470Lm	12VAC/DC	>80	>0.5	110°	Alm+Plastic	100
BA24-30661	MR16	GU5.3	4000K	6W	45W	470Lm	12VAC/DC	>80	>0.5	110°	Alm+Plastic	100
BA24-30663	MR16	GU5.3	6500K	6W	45W	470Lm	12VAC/DC	>80	>0.5	110°	Alm+Plastic	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA25-00550	MR16	GU10	2700K	5W	50W	400Lm	220V-240VAC	>80	>0.5	38°	Alm+Plastic	100
BA25-00551	MR16	GU10	4000K	5W	50W	400Lm	220V-240VAC	>80	>0.5	38°	Alm+Plastic	100
BA25-00553	MR16	GU10	6500K	5W	50W	400Lm	220V-240VAC	>80	>0.5	38°	Alm+Plastic	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA25-00554	MR16	GU10	Red	5W	50W	/	220V-240VAC	/	>0.5	38°	Alm+Plastic	100
BA25-00555	MR16	GU10	Green	5W	50W	/	220V-240VAC	/	>0.5	38°	Alm+Plastic	100
BA25-00556	MR16	GU10	Blue	5W	50W	/	220V-240VAC	/	>0.5	38°	Alm+Plastic	100
BA25-00557	MR16	GU10	Amber	5W	50W	/	220V-240VAC	/	>0.5	38°	Alm+Plastic	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA25-00750	MR16	GU10	2700K	7W	75W	550Lm	220V-240VAC	>80	>0.5	38°	Alm+Plastic	100
BA25-00751	MR16	GU10	4000K	7W	75W	550Lm	220V-240VAC	>80	>0.5	38°	Alm+Plastic	100
BA25-00753	MR16	GU10	6500K	7W	75W	550Lm	220V-240VAC	>80	>0.5	38°	Alm+Plastic	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS


Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA26-00550	MR16-Dimmable	GU10	2700K	5W	40W	410Lm	220V-240VAC	>80	>0.5	38°	Alm+Plastic	100
BA26-00551	MR16-Dimmable	GU10	4000K	5W	40W	410Lm	220V-240VAC	>80	>0.5	38°	Alm+Plastic	100



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA27-00550	MR16	GU10	2700K	4.8W	50W	400Lm	220V-240VAC	>80	>0.5	38°	Glass	100
BA27-00551	MR16	GU10	4000K	4.8W	50W	400Lm	220V-240VAC	>80	>0.5	38°	Glass	100
BA27-00553	MR16	GU10	6500K	4.8W	50W	400Lm	220V-240VAC	>80	>0.5	38°	Glass	100




MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA27-60650	MR16-Dimmable	GU10	2700K	5.5W	50W	400Lm	220V-240VAC	>80	>0.5	38°	Glass	100
BA27-60651	MR16-Dimmable	GU10	4000K	5.5W	50W	400Lm	220V-240VAC	>80	>0.5	38°	Glass	100




MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA29-30240	G4	G4	2700K	1.5W	15W	140Lm	12VAC/DC	>80	>0.5	320°	Plastic	500
BA29-30243	G4	G4	6500K	1.5W	15W	140Lm	12VAC/DC	>80	>0.5	320°	Plastic	500




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA29-00390	G9-Dimmable	G9	2700K	3W	20W	220Lm	220V-240VAC	>80	>0.5	320°	Plastic	500
BA29-00393	G9-Dimmable	G9	6500K	3W	20W	220Lm	220V-240VAC	>80	>0.5	320°	Plastic	500



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA29-00590	G9	G9	2700K	5W	45W	420Lm	220V-240VAC	>80	>0.5	320°	PC	500
BA29-00593	G9	G9	6500K	5W	45W	420Lm	220V-240VAC	>80	>0.5	320°	PC	500



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA29-50290	G9	G9	2700K	2W	24W	240Lm	220V-240VAC	>80	>0.5	320°	Glass	200
BA29-50293	G9	G9	6500K	2W	24W	240Lm	220V-240VAC	>80	>0.5	320°	Glass	200



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA35-00410	C35-Tail	E14	2700K	4W	40W	470Lm	220V-240VAC	>80	>0.5	360°	Glass	100



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA36-00410	C35	E14	2700K	4W	40W	470Lm	220V-240VAC	>80	>0.5	360°	Glass	100
BA36-00610	C35	E14	2700K	6W	60W	600Lm	220V-240VAC	>80	>0.5	360°	Glass	100



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA36-60410	C35-Dimmable	E14	2700K	4W	40W	470Lm	220V-240VAC	>80	>0.5	360°	Glass	100



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA37-00410	P45	E14	2700K	4W	40W	470Lm	220V-240VAC	>80	>0.5	360°	Glass	100



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA37-00420	G45	E27	2700K	4W	40W	470Lm	220V-240VAC	>80	>0.5	360°	Glass	100



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA38-00620	A60	E27	2700K	6W	50W	660Lm	220V-240VAC	>80	>0.5	360°	Glass	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA38-00720	A60	E27	2700K	7W	60W	806Lm	220V-240VAC	>80	>0.5	360°	Glass	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA38-60720	A60-Dimmable	E27	2700K	7W	60W	806Lm	220V-240VAC	>80	>0.5	360°	Glass	100

LED

15,000 HOURS

2 YEARS WARRANTY



CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA38-60820	A60-Dimmable	E27	2700K	8W	60W	806Lm	220V-240VAC	>80	>0.5	360°	Glass	100

LED

15,000 HOURS

2 YEARS WARRANTY



CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA39-00420	T45	E27	2700K	4W	40W	470Lm	220V-240VAC	>80	>0.5	360°	Glass	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS RESTRICTED

Hg 0.0mg

IP 20

Non-Flammable

Light Output > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA46-00620	ST64	E27	2700K	6W	50W	660Lm	220V-240VAC	>80	>0.5	360°	Glass	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS RESTRICTED

Hg 0.0mg

IP 20

Non-Flammable

Light Output > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA41-60720	G95-Dimmable	E27	2700K	7W	60W	806Lm	220V-240VAC	>80	>0.5	360°	Glass	20

LED

15,000 HOURS

2 YEARS WARRANTY

DIMMABLE

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS RESTRICTED

Hg 0.0mg

IP 20

Non-Flammable

Light Output > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA38-90720	A60-Soft-Dimmable	E27	3000K	7W	60W	806Lm	220V-240VAC	>80	>0.8	360°	Glass	100
BA38-90723	A60-Soft-Dimmable	E27	6500K	7W	60W	806Lm	220V-240VAC	>80	>0.8	360°	Glass	100

LED

15,000 HOURS

2 YEARS WARRANTY

DIMMABLE

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS RESTRICTED

Hg 0.0mg

IP 20

Non-Flammable

Light Output > 12,500

-20°C +40°C



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA41-30720	G95-Soft	E27	3000K	7W	60W	806Lm	220V-240VAC	>80	>0.5	360°	Glass	20
BA41-30723	G95-Soft	E27	6500K	7W	60W	806Lm	220V-240VAC	>80	>0.5	360°	Glass	20



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BB36-00410	C35-Amber	E14	2200K	4W	30W	360Lm	220V-240VAC	>80	>0.5	360°	Glass	100



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BB36-60410	C35-Amber-Dimmable	E14	2200K	4W	32W	360Lm	220V-240VAC	>80	>0.5	360°	Glass	100



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BB37-00410	P45-Amber	E14	2200K	4W	40W	360Lm	220V-240VAC	>80	>0.5	360°	Glass	100



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BB37-00420	G45-Amber	E27	2200K	4W	40W	360Lm	220V-240VAC	>80	>0.5	360°	Glass	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE EAC

LVD

EMC

ErP COMPLIANT

RoHS COMPLIANT

Hg 0.0mg

IP 20

Non-Flammable

Output > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BB39-00420	T45	E27	2200K	4W	32W	360Lm	220V-240VAC	>80	>0.5	360°	Glass	100

LED

15,000 HOURS

2 YEARS WARRANTY

CE EAC

LVD

EMC

ErP COMPLIANT

RoHS COMPLIANT

Hg 0.0mg

IP 20

Non-Flammable

Output > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BB46-00420	ST64-Amber	E27	2200K	4W	32W	360Lm	220V-240VAC	>80	>0.5	360°	Glass	50

LED

15,000 HOURS

2 YEARS WARRANTY

CE EAC

LVD

EMC

ErP COMPLIANT

RoHS COMPLIANT

Hg 0.0mg

IP 20

Non-Flammable

Output > 12,500

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BB46-00620	ST64-Amber	E27	2200K	6W	45W	510Lm	220V-240VAC	>80	>0.8	360°	Glass	50

LED

15,000 HOURS

2 YEARS WARRANTY

CE EAC

LVD

EMC

ErP COMPLIANT

RoHS COMPLIANT

Hg 0.0mg

IP 20

Non-Flammable

Output > 12,500


-20°C +40°C



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BB46-60620	ST64-Amber-Dimmable	E27	2200K	6W	45W	510Lm	220V-240VAC	>80	>0.8	360°	Glass	50




MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BB47-00420	G95-Amber	E27	2200K	4W	32W	360Lm	220V-240VAC	>80	>0.5	360°	Glass	20



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BB47-00620	G95-Amber	E27	2200K	6W	45W	510Lm	220V-240VAC	>80	>0.5	360°	Glass	20



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BB47-60620	G95-Amber-Dimmable	E27	2200K	6W	45W	510Lm	220V-240VAC	>80	>0.7	360°	Glass	20



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BB48-00620	G125-Amber	E27	2200K	6W	42W	510Lm	220V-240VAC	>80	>0.5	360°	Glass	20

LED

15,000 HOURS

2 YEARS WARRANTY

CE EAC

LVD

EMC

ErP COMPLIANT

RoHS COMPLIANT

Hg 0.0mg


IP 20

Recycle Symbol

WEEE Symbol

WEEE Symbol

-20°C +40°C



MODEL NO	TYPE	SOCKET	CCT	WATT	EQUIVALENT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BB62-00620	T30-200-Dimmable	E27	2200K	6W	42W	510Lm	220V-240VAC	>80	>0.5	360°	Glass	50

LED

15,000 HOURS

2 YEARS WARRANTY



CE EAC

LVD

EMC

ErP COMPLIANT

RoHS COMPLIANT

Hg 0.0mg


IP 20

Recycle Symbol

WEEE Symbol

WEEE Symbol

-20°C +40°C



MODEL NO	TYPE	CONNECTION	SOCKET	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA52-00680	T8/0.6mt	Double Side	G13	3000K	9W	900Lm	220V-240VAC	>80	>0.5	270°	Glass	25
BA52-00681	T8/0.6mt	Double Side	G13	4000K	9W	900Lm	220V-240VAC	>80	>0.5	270°	Glass	25
BA52-00683	T8/0.6mt	Double Side	G13	6500K	9W	900Lm	220V-240VAC	>80	>0.5	270°	Glass	25

LED

15,000 HOURS

2 YEARS WARRANTY

100Lm/W

CE EAC

LVD

EMC

ErP COMPLIANT

RoHS COMPLIANT

Hg 0.0mg


IP 20

Recycle Symbol

WEEE Symbol

WEEE Symbol

-20°C +40°C



MODEL NO	TYPE	CONNECTION	SOCKET	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA52-01280	T8/1.2mt	Double Side	G13	3000K	18W	1800Lm	220V-240VAC	>80	>0.5	270°	Glass	25
BA52-01281	T8/1.2mt	Double Side	G13	4000K	18W	1800Lm	220V-240VAC	>80	>0.5	270°	Glass	25
BA52-01283	T8/1.2mt	Double Side	G13	6500K	18W	1800Lm	220V-240VAC	>80	>0.5	270°	Glass	25

LED

15,000 HOURS

2 YEARS WARRANTY

100Lm/W

CE EAC

LVD

EMC

ErP COMPLIANT

RoHS COMPLIANT

Hg 0.0mg

IP 20

Recycle Symbol


WEEE Symbol

WEEE Symbol

-20°C +40°C



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	CONNECTION	SOCKET	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA52-01580	T8/1.5mt	Double Side	G13	3000K	24W	2400Lm	220V-240VAC	>80	>0.5	270°	Glass	25
BA52-01581	T8/1.5mt	Double Side	G13	4000K	24W	2400Lm	220V-240VAC	>80	>0.5	270°	Glass	25
BA52-01583	T8/1.5mt	Double Side	G13	6500K	24W	2400Lm	220V-240VAC	>80	>0.5	270°	Glass	25

LED

15,000 HOURS

2 YEARS WARRANTY

100Lm/w

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS



Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	CONNECTION	SOCKET	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA52-20680	T8/0.6mt	Single Side	G13	3000K	9W	900Lm	220V-240VAC	>80	>0.5	270°	Glass	25
BA52-20681	T8/0.6mt	Single Side	G13	4000K	9W	900Lm	220V-240VAC	>80	>0.5	270°	Glass	25
BA52-20683	T8/0.6mt	Single Side	G13	6500K	9W	900Lm	220V-240VAC	>80	>0.5	270°	Glass	25

LED

15,000 HOURS

2 YEARS WARRANTY

100Lm/w

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS


Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	CONNECTION	SOCKET	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA52-21280	T8/1.2mt	Single Side	G13	3000K	18W	1800Lm	220V-240VAC	>80	>0.5	270°	Glass	25
BA52-21281	T8/1.2mt	Single Side	G13	4000K	18W	1800Lm	220V-240VAC	>80	>0.5	270°	Glass	25
BA52-21283	T8/1.2mt	Single Side	G13	6500K	18W	1800Lm	220V-240VAC	>80	>0.5	270°	Glass	25

LED

15,000 HOURS

2 YEARS WARRANTY

100Lm/w

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS


Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



MODEL NO	TYPE	CONNECTION	SOCKET	CCT	WATT	LUMEN	VOLTAGE	CRI	P.F.	ANGLE	MATERIAL	PCS/CTN
BA52-21580	T8/1.5mt	Single Side	G13	3000K	24W	2400Lm	220V-240VAC	>80	>0.5	270°	Glass	25
BA52-21581	T8/1.5mt	Single Side	G13	4000K	24W	2400Lm	220V-240VAC	>80	>0.5	270°	Glass	25
BA52-21583	T8/1.5mt	Single Side	G13	6500K	24W	2400Lm	220V-240VAC	>80	>0.5	270°	Glass	25

LED

15,000 HOURS

2 YEARS WARRANTY

100Lm/w

CE ENEC

LVD

EMC

ErP COMPLIANT

RoHS

Hg 0.0mg

IP 20

Non-Flammable

Lifespan > 12,500

-20°C +40°C



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

- LED STRIPS
- LED MODULE FIXTURES
- LED DRIVERS
- POWER SUPPLYS
- RGB CONTROLLERS
- SENSORS
- TRACKLINE APPARATUS
- PENDANT LAMP HOLDERS
- ADHESIVE TAPES
- WATERPROOF CONNECTOR



MODEL NO	TYPE	LED TYPE	CCT	WATT/MT	LED QTY/MT	VOLTAGE	IP	MT/CARTON
BS01-00100	Ecoline	3528	3000K	4.8W	60 Led	12VDC	IP20	250 Mt
BS01-00103	Ecoline	3528	6500K	4.8W	60 Led	12VDC	IP20	250 Mt
BS01-00104	Ecoline	3528	Red	4.8W	60 Led	12VDC	IP20	250 Mt
BS01-00105	Ecoline	3528	Green	4.8W	60 Led	12VDC	IP20	250 Mt
BS01-00106	Ecoline	3528	Blue	4.8W	60 Led	12VDC	IP20	250 Mt

LED

20,000 HOURS

2 YEARS WARRANTY


CE ENEC

LVD

EMC

RoHS

IP 20



MODEL NO	TYPE	LED TYPE	CCT	WATT/MT	LED QTY/MT	VOLTAGE	IP	MT/CARTON
BS01-00300	Ecoline	5050	3000K	14.4W	60 Led	12VDC	IP20	250 Mt
BS01-00301	Ecoline	5050	4000K	14.4W	60 Led	12VDC	IP20	250 Mt
BS01-00303	Ecoline	5050	6500K	14.4W	60 Led	12VDC	IP20	250 Mt
BS01-00304	Ecoline	5050	Red	14.4W	60 Led	12VDC	IP20	250 Mt
BS01-00305	Ecoline	5050	Green	14.4W	60 Led	12VDC	IP20	250 Mt
BS01-00306	Ecoline	5050	Blue	14.4W	60 Led	12VDC	IP20	250 Mt
BS01-00309	Ecoline	5050	RGB	14.4W	60 Led	12VDC	IP20	250 Mt

LED

20,000 HOURS

2 YEARS WARRANTY


CE ENEC

LVD

EMC

RoHS

IP 20



MODEL NO	TYPE	LED TYPE	CCT	WATT/MT	LED QTY/MT	VOLTAGE	IP	MT/CARTON
BS01-00310	Ecoline	5050	3000K	14.4W	60 Led	24VDC	IP20	250 Mt
BS01-00311	Ecoline	5050	4000K	14.4W	60 Led	24VDC	IP20	250 Mt
BS01-00313	Ecoline	5050	6500K	14.4W	60 Led	24VDC	IP20	250 Mt
BS01-00319	Ecoline	5050	RGB	14.4W	60 Led	24VDC	IP20	250 Mt

LED

20,000 HOURS

2 YEARS WARRANTY


CE ENEC

LVD

EMC

RoHS

IP 20



MODEL NO	TYPE	LED TYPE	CCT	WATT/MT	LED QTY/MT	VOLTAGE	IP	MT/CARTON
BS01-00400	Ecoline	5050	3000K	14.4W	60 Led	12VDC	IP54	250 Mt
BS01-00403	Ecoline	5050	6500K	14.4W	60 Led	12VDC	IP54	250 Mt
BS01-00409	Ecoline	5050	RGB	14.4W	60 Led	12VDC	IP54	250 Mt

LED

20,000 HOURS

2 YEARS WARRANTY

IP54


CE ENEC

LVD

EMC

RoHS

IP 54


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	LED TYPE	CCT	WATT/MT	LUMEN/MT	LED QTY/MT	VOLTAGE	IP	MT/CARTON
BS01-00610	Plusline	2835	3000K	18W	1200Lm	120 Led	24VDC	IP20	100 Mt
BS01-00611	Plusline	2835	4000K	18W	1200Lm	120 Led	24VDC	IP20	100 Mt
BS01-00613	Plusline	2835	6500K	18W	1200Lm	120 Led	24VDC	IP20	100 Mt

LED

20,000 HOURS

2 YEARS WARRANTY


CE ENEC

LVD

EMC

RoHS

IP 20



MODEL NO	TYPE	LED TYPE	CCT	WATT/MT	LED QTY/MT	VOLTAGE	IP	MT/CARTON
BS01-00550	Ecoline	5630	3000K	12W	120 Led	220V-240VAC	IP54	100 Mt
BS01-00553	Ecoline	5630	6500K	12W	120 Led	220V-240VAC	IP54	100 Mt
BS01-00559	Ecoline	5050	RGB	12W	96 Led	220V-240VAC	IP54	100 Mt

LED

20,000 HOURS

2 YEARS WARRANTY


CE ENEC

LVD

EMC

RoHS

IP 54



MODEL NO	TYPE	DESCRIPTION	VOLTAGE	IP	PCS/CTN
BS01-99901	Ecoline-Plug	For 120 Led strip	220V-240VAC	IP20	100
BS01-99902	Ecoline-Plug	For 180 Led strip	220V-240VAC	IP20	100

LED

20,000 HOURS

2 YEARS WARRANTY


CE ENEC

LVD

EMC

RoHS

IP 20



MODEL NO	TYPE	LED TYPE	CCT	WATT/PCS	LED QTY/MT	VOLTAGE	IP	PCS/CTN
BS04-00203	Moduline	5730	6500K	1.2W	3 Led	12VDC	IP67	3000
BS04-00204	Moduline	5730	Red	1.2W	3 Led	12VDC	IP67	3000
BS04-00206	Moduline	5730	Blue	1.2W	3 Led	12VDC	IP67	3000

LED

20,000 HOURS

2 YEARS WARRANTY

IP67


CE ENEC

LVD

EMC

RoHS

IP 67



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	DIMMING TYPE	INPUT VOLTAGE	OUTPUT VOLTAGE	INPUT POWER	OUTPUT POWER	
BY05-60120	Dimmable Driver	Triac	220V-240VAC	20-40VDC	Max. 13.8W	12W	
OUTPUT CURRENT	POWER FACTOR	EFFICIENCY	LIFE TIME	WORKING HUM.	IP	MATERIAL	PCS/CTN
300mA±5%	>0.9	>%86	20000 Hours	<%93RH	IP20	Plastic	200

3 YEARS WARRANTY



MODEL NO	TYPE	DIMMING TYPE	INPUT VOLTAGE	OUTPUT VOLTAGE	INPUT POWER	OUTPUT POWER	
BY05-60180	Dimmable Driver	Triac	220V-240VAC	40-60VDC	Max. 20.6W	18W	
OUTPUT CURRENT	POWER FACTOR	EFFICIENCY	LIFE TIME	WORKING HUM.	IP	MATERIAL	PCS/CTN
300mA±5%	>0.9	>%86	20000 Hours	<%93RH	IP20	Plastic	125

3 YEARS WARRANTY



MODEL NO	WATT	OUTPUT VOLTAGE	OUTPUT CURRENT	P.F.	VOLTAGE	IP	MATERIAL	DIMENSIONS	PCS/CTN
BY02-00250	25W	12VDC	2A	>0.6	220V-240VAC	IP20	Aluminium	86x58x33	60
BY02-00600	60W	12VDC	5A	>0.6	220V-240VAC	IP20	Aluminium	160x40x32	60
BY02-01000	100W	12VDC	8.5A	>0.6	220V-240VAC	IP20	Aluminium	190x47x35	60
BY02-01500	150W	12VDC	12.5A	>0.6	220V-240VAC	IP20	Aluminium	200x57x40	60
BY02-02000	200W	12VDC	16.5A	>0.6	220V-240VAC	IP20	Aluminium	225x68x40	40
BY02-02500	250W	12VDC	20A	>0.6	220V-240VAC	IP20	Aluminium	220x68x40	40

2 YEARS WARRANTY



MODEL NO	WATT	OUTPUT VOLTAGE	OUTPUT CURRENT	P.F.	VOLTAGE	IP	MATERIAL	DIMENSIONS	PCS/CTN
BY02-10250	25W	24VDC	1A	>0.6	220V-240VAC	IP20	Aluminium	86x58x33	60
BY02-10600	60W	24VDC	2.5A	>0.6	220V-240VAC	IP20	Aluminium	160x40x32	60
BY02-11000	100W	24VDC	4.2A	>0.6	220V-240VAC	IP20	Aluminium	190x47x35	60
BY02-11500	150W	24VDC	6.3A	>0.6	220V-240VAC	IP20	Aluminium	200x57x40	60
BY02-12000	200W	24VDC	8.25A	>0.6	220V-240VAC	IP20	Aluminium	225x68x40	40
BY02-12500	250W	24VDC	10A	>0.6	220V-240VAC	IP20	Aluminium	220x68x40	40

2 YEARS WARRANTY




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com




MODEL NO	WATT	OUTPUT VOLTAGE	OUTPUT CURRENT	P.F.	VOLTAGE	IP	MATERIAL	DIMENSIONS	PCS/CTN
BY02-03500	350W	12VDC	30A	>0.6	220V-240VAC	IP20	Aluminium	41x68x223	40
BY02-13500	350W	24VDC	15A	>0.6	220V-240VAC	IP20	Aluminium	41x68x223	40

2 YEARS
WARRANTY




MODEL NO	WATT	INPUT VOLTAGE	OUTPUT	IP	MATERIAL	PCS/CTN
BY35-30130	3W	220-240V 50/60Hz	3.7V 2200mAh	IP20	Plastic	50
BY35-30230	5W	220-240V 50/60Hz	7.4V 2200mAh	IP20	Plastic	50
BY35-30330	10W	220-240V 50/60Hz	11.1V 2200mAh	IP20	Plastic	50

2 YEARS
WARRANTY



MODEL NO	TYPE	WATT	OUTPUT CURRENT	OUTPUT VOLTAGE	VOLTAGE	MATERIAL	PCS/CTN
BY30-01120	Controller	216W	18A	12VDC/24VDC	220V-240VAC	Aluminium	100

2 YEARS
WARRANTY



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

MODEL NO	TYPE	SENSOR TYPE	IP	INPUT VOLTAGE	RATED LOAD	RATED LOAD	RATED LOAD	POWER CONSUMPTION	TIME DELAY	DETECTION ANGLE
BY31-01030	MS03	PIR	IP20	220V-240VAC	800W(Halogen)	150W(CFL)	250W(LED)	0.45W(Static 0.1W)	5 Sec.-8 Min (Adjustable)	180°
DETECTION DISTANCE	DETECTION SPEED	AMBIENT LIGHT	INSTALLATION HEIGHT	WORKING TEMPERATURE	WORKING HUMIDITY	MATERIAL	PCS/CTN			
30 Mt Max.24°	0.6-1.5 m/S	5-2000LUX	1.8-3.5 Mt	-20°-+40°	%93 RH	Plastic	50			





2 YEARS WARRANTY

CE EAC

LVD

EMC

RoHS



MODEL NO	TYPE	SENSOR TYPE	IP	INPUT VOLTAGE	RATED LOAD	RATED LOAD	RATED LOAD	POWER CONSUMPTION	TIME DELAY	DETECTION ANGLE
BY31-01010	MS01	PIR	IP20	220V-240VAC	2000W(Halogen)	500W(CFL)	800W(LED)	0.45W(Static 0.1W)	5 Sec.-5 Min (Adjustable)	360°
DETECTION DISTANCE	DETECTION SPEED	AMBIENT LIGHT	INSTALLATION HEIGHT	WORKING TEMPERATURE	WORKING HUMIDITY	MATERIAL	PCS/CTN			
16 Mt Max. 24°	0.6-1.5 m/S	5-2000LUX	1.5-3.5 Mt	-20°-+40°	%93 RH	Plastic	50			



2 YEARS WARRANTY



CE EAC

LVD

EMC

RoHS

IP 20



MODEL NO	TYPE	SENSOR TYPE	IP	INPUT VOLTAGE	RATED LOAD	RATED LOAD	RATED LOAD	POWER CONSUMPTION	TIME DELAY	DETECTION ANGLE
BY31-01040	MS04	PIR	IP20	220V-240VAC	800W(Halogen)	150W(CFL)	250W(LED)	0.45W(Static 0.1W)	5 Sec.-5 Min (Adjustable)	360°
DETECTION DISTANCE	DETECTION SPEED	AMBIENT LIGHT	INSTALLATION HEIGHT	WORKING TEMPERATURE	WORKING HUMIDITY	MATERIAL	PCS/CTN			
6 Mt Max. 24°	0.6-1.5 m/S	5-2000LUX	2-4 Mt	-20°-+40°	%93 RH	Plastic	100			



2 YEARS WARRANTY



CE EAC

LVD

EMC


RoHS

IP 20




*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com

MODEL NO	TYPE	INPUT POWER	RATED LOAD	AMPER	AMBIENT LIGHT	ELECTRICAL PROTECTION CLASS
BY31-03010	PS01	220V-240VAC	Max. 1000W	6A	<5-50 Lux	Class II
PROTECTION DEGREE	WORKING TEMPERATURE	WORKING HUMIDITY	MATERIAL	PCS/CTN		
IP20	-20°~+40°	<%93RH	Plastic	100		




2 YEARS WARRANTY



MODEL NO	TYPE	INPUT POWER	RATED LOAD	AMPER	AMBIENT LIGHT	ELECTRICAL PROTECTION CLASS
BY31-03040	PS03	220V-240VAC	Max. 3000W	25A	<5-100 Lux	Class II
PROTECTION DEGREE	WORKING TEMPERATURE	WORKING HUMIDITY	MATERIAL	PCS/CTN		
IP20	-20°~+40°	<%93RH	Plastic	100		




2 YEARS WARRANTY



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com




MODEL NO	TYPE	BODY COLOR	LENGHT	WIRE	MATERIAL	PCS/CTN
BY40-00110	2-Wires	White	1 Mt	Copper	Aluminium	20
BY40-00120	2-Wires	White	2 Mt	Copper	Aluminium	20
BY40-00130	2-Wires	White	3 Mt	Copper	Aluminium	20

2 YEARS
WARRANTY


MODEL NO	TYPE	BODY COLOR	LENGHT	WIRE	MATERIAL	PCS/CTN
BY40-00111	2-Wires	Black	1 Mt	Copper	Aluminium	12
BY40-00121	2-Wires	Black	2 Mt	Copper	Aluminium	12
BY40-00131	2-Wires	Black	3 Mt	Copper	Aluminium	12

2 YEARS
WARRANTY


MODEL NO	TYPE	BODY COLOR	LENGHT	WIRE	MATERIAL	PCS/CTN
BY40-00210	4-Wires	White	1 Mt	Copper	Aluminium	10
BY40-00220	4-Wires	White	2 Mt	Copper	Aluminium	10

2 YEARS
WARRANTY


MODEL NO	TYPE	BODY COLOR	LENGHT	WIRE	MATERIAL	PCS/CTN
BY40-00211	4-Wires	Black	1 Mt	Copper	Aluminium	10
BY40-00221	4-Wires	Black	2 Mt	Copper	Aluminium	10

2 YEARS
WARRANTY


*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	TYPE	BODY COLOR	WIRE	MATERIAL	PCS/CTN
BY40-00240	2-Wires	White	Copper	Aluminium	25
BY40-00241	2-Wires	Black	Copper	Aluminium	25

2 YEARS
WARRANTY



MODEL NO	TYPE	BODY COLOR	WIRE	MATERIAL	PCS/CTN
BY40-00230	2-Wires	White	Copper	Aluminium	250
BY40-00231	2-Wires	Black	Copper	Aluminium	250

2 YEARS
WARRANTY



MODEL NO	TYPE	BODY COLOR	WIRE	MATERIAL	PCS/CTN
BY40-00340	4-Wires	White	Copper	Aluminium	25
BY40-00341	4-Wires	Black	Copper	Aluminium	25

2 YEARS
WARRANTY



MODEL NO	TYPE	BODY COLOR	WIRE	MATERIAL	PCS/CTN
BY40-00330	4-Wires	White	Copper	Aluminium	25
BY40-00331	4-Wires	Black	Copper	Aluminium	25

2 YEARS
WARRANTY



*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	BY45-00201
SOCKET	E27
BODY COLOR	Copper
LENGHT	1 Mt
MATERIAL	Metal
PCS/CARTON	100

2 YEARS
WARRANTY

MODEL NO	BT42-09000
HOUSING	PA
METAL PART	Brass
WATERPROOF O-RING	Silicone
RATED VOLTAGE	250V
RATED CURRENT	16A
CABLE RANGE	0.5-1.5mm2
CABLE OD	≤7mm
Operating Temp. range	-40°-+85°
WATERPROOF RATE	IP67
FIRE CLASSIFICATION	94V0
PCS/CARTON	1000

2 YEARS
WARRANTY **IP67**

*Technical information indicated above may have tolerance $\pm 10\%$. For final updated information please visit website www.braytron.com



MODEL NO	SOCKET	BODY COLOR	LENGHT	MATERIAL	PCS/CTN
BY45-00100	E27	White	1 Mt	Plastic	100
BY45-00101	E27	Black	1 Mt	Plastic	100
BY45-00102	E27	Red	1 Mt	Plastic	100
BY45-00103	E27	Green	1 Mt	Plastic	100
BY45-00104	E27	Blue	1 Mt	Plastic	100
BY45-00200	E27	Coffee	1 Mt	Plastic	100



*Technical information indicated above may have tolerance ±%10.For final updated information please visit website www.braytron.com



Garden Wall Light

ITEM NO	BODY COLOR
BG32-00324	NICKEL

RITA-S EL.2
GU10
35W
220V-240VAC
Stainless Steel
%5-%95
20



Braytron
lighting expert



www.braytron.com

Braytron

lighting expert

Lighting expert Aydınlatma uzmanı Lichtspezialisten
Expertul în iluminare Experti i ndricimit Expert en éclairage
Verlichting expert Expertes en iluminación Esperto di illuminazione
эксперт в освещении Експертът в осветлението
ειδίκοι στον φωτισμό Strobnjak za rasvetlu Осветлен експерт

